



MTS

automation
components

**LISOVACIE SYSTÉMY
SCHMIDT TECHNOLOGY**

Výdava



Od roku 1996 pomáhame firmám inovovať výrobu pomocou moderných a inteligentných technológií.

Takých, ktoré umožňujú vyrábať technologicky najnáročnejšie produkty. Popritom zefektívňujú výrobné procesy, šetria ľuďom čas a uľahčujú im život.

Naším cieľom sú kvalitné výrobky, spokojní ľudia a dobré prostredie v priemyselnej výrobe.

Prostriedkom sú naša odbornosť a skúsenosti, férové vzťahy a starostlivo vybrané spoľahlivé technológie.

Chceme ukázať, že je možné úspešne podnikáť aj férovo, ľudsky a s pevnými hodnotami. Že spoločnosť z Oravy môže byť kľúčovým partnerom pre veľké firmy z celého sveta.

Vybavíme vašu výrobu osvedčenými komponentmi od našich dlhoročných partnerov.

Poradíme vám s ich výberom a aj s tým, ako vybrané komponenty do vašej linky čo najlepšie a cenovo najvýhodnejšie implementovať a využiť na maximum. Vieme sa postarať aj o celú vašu výrobu od A po Z.



Nemecká spoločnosť SCHMIDT Technology patrí medzi lídrov vo výrobe lisov a lisovacích zariadení, ktoré dodáva do celého sveta. Nejedná sa však iba o samostatné lisy a lisovacie zariadenia. Produkty spoločnosti SCHMIDT Technology umožňujú ich integráciu do komplexných automatizovaných liniek a výrobných celkov.

Široké portfólio lisov a lisovacích zariadení v našej ponuke umožňuje zvoliť ten správny produkt pre konkrétnu aplikáciu.

Zariadenia sú vhodné na lisovanie, spájanie, tvarovanie, krimpovanie, nitovanie, značenie, ohýbanie, dierovanie, rezanie a podobne.



Martin Planieta
obchodno-technický zástupca
pre lisovaciu techniku





LISY A LISOVACIA TECHNIKA SCHMIDT

S lismi dotiahnete do dokonalosti výrobky, ktoré by inak vaši operátori museli kompletizovať ručne.

Pre rôzne aplikácie vám odporúčame ručné lisy, pneumatické lisy, hydropneumatické lisy ako aj elektrické lisy a servolisy.

Máme rôzne lisy pre akékoľvek použitie:

- **Ručné lisy** – pre silovo a objemovo nenáročné lisovanie
- **Pneumatické lisy** – veľký objem produkcie
- **Elektrické lisy** – znižujú náklady na lisovanie
- **Servolisy** – ekonomická a precízna montáž

Lisy Schmidt sa nám osvedčujú u zákazníkov, ale aj v našej vlastnej výrobe:

- Lisujú s veľkou presnosťou
- Vydržia všeličo a len tak sa nepokazia
- Majú veľkú životnosť oproti iným značkám
- Ľuďom sa s nimi dobre pracuje, aj vďaka ergonómii a nízkej hlučnosti
- Vyberiete si z rôznych typov s lisovacou kapacitou do 150 kN

Zistite viac na mts.sk/lisovacia-technika

OBSAH KATALÓGU

Predstavenie 5

Ručné lisy 8

Pneumatické lisy 24

Hydro-pneumatické lisy 38


Elektrické lisy 52

Servolisy 56

Kontrolné jednotky 65

Softvér/Komponenty 71

Kontakt 79

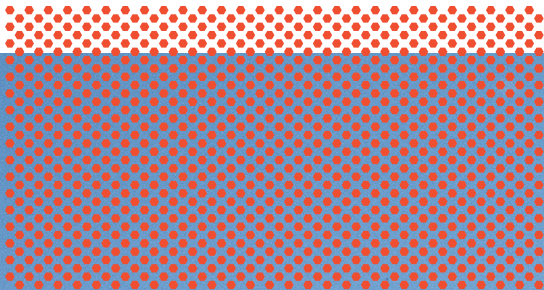

Family-Run Company

As internationally accepted Technology Leader



SCHMIDT Technology is a family-run, medium-sized enterprise at the highest technological level. The success speaks for itself: Today, products and services from **SCHMIDT Technology** are exported to over 80 countries of the world.

The safety and quality of **SCHMIDT Technology** products make them unique on the global market and thus sought after for decades. The international orientation of the company and the combination of creative and intelligent solutions, together with economic and efficient manufacturing in Germany, lay the groundwork for the successful future-oriented position of the enterprise.

Because of this, **SCHMIDT Technology** is valued internationally as a solid, dependable and competent partner. The outstanding characteristics of a successful company must include a strong visionary innovation potential.

SCHMIDT Technology recognized this at an early stage and invested ardently in the fields of research and development. At the same time, the company traditionally keeps in close contact with external research institutes and universities.

As a result, the name **SCHMIDT Technology** is associated with highest quality standards worldwide. In keeping with this, **SCHMIDT Technology** holds all relevant quality certificates such as DIN EN ISO 9001:2008.

Your profitability Is our top priority

Anyone who has to assemble two or more components must decide which assembly technology he wants to use. Traditional techniques such as screwing, welding, soldering and bond are being replaced, more and more, by cost-effective and rational pressing and joining operations for economic reasons.

These are exactly our strengths.




Use our knowledge for your application


The right press type can be chosen depending on the application. Today, **SCHMIDT® Presses** stand for first-class assembly technology worldwide. This applies both for stand-alone machines and for assembly modules integrated in complex automation lines.

SCHMIDT Technology a leader in intelligent joining technology, has the widest product range of all producers. From **SCHMIDT® ServoPress** and **SCHMIDT® HydroPneumaticPress** or **SCHMIDT® PneumaticPress** and **SCHMIDT® ElectricPress** up to our **SCHMIDT® ManualPress** range, our solutions are tailored to meet all of your process requirements. Apart from the presses, the safety and control technology of the **SCHMIDT® PressesControl** sets standards due to its system philosophy, force/stroke monitoring and integrated measurement technology. A continuous process control and the essential ISO-conforming documentation are the tools for high productivity in today's efficient assembly. These performance features make **SCHMIDT Technology** the undisputed technological leader in the field of precision joining technology today.


This is the basis for the excellent reputation of **SCHMIDT Technology**, specifically in the key sectors such as automobile technology, aerospace technology, electrics/electronics, micro-mechanics and medical technology.




Pressing




Snap Fitting




Forming




Forming Calibrating / Sizing




Crimping




Flaring



Riveting




Punching




Marking



Cutting



Bending



Joining

In Partnership To success

A global market requires linked processes. Thanks to the OPC connection via Ethernet technology, you can access your process data at any time. Furthermore, local representation and rapid response are essential. Our worldwide distribution network of subsidiaries and trained sales & support partners ensure that our customers will receive full support for all their requirements. All our representatives' support teams have been trained specifically on our products.

Deciding in favour of our technology is the first step to a successful partnership.

The economic success is then shown in daily production. High quality products optimized for assembly processes are as important as an efficient after-sales service. Our name is your guarantee.



Safety without compromise

In 2006, the EC Machine Directives became national law in the EU member states. The articles of this agreement were the determining factors for the design of safety controls for assembly and press technology. Furthermore, a EC type approval became necessary for applications with manual workstations.

Even before the most recent regulations became legally binding, **SCHMIDT Technology** had delivered all press systems in compliance with this new law to all its customers (even to countries where these regulations are not implemented).

Our philosophy does not allow making compromises with regard to safety and health of the user.

Skills to your advantage

All our training centers provide machinery and full expertise to assist our customers with their applications.

On this basis, a team of skilled engineers plan economic solutions from the simple manual workstation to the fully automated assembly line.

Competent technical customer service is our strength. We offer training courses and seminars in our **SCHMIDT® TrainingCenters**. Your employees will achieve sustainable knowledge of the presses and their practical use resulting in a benefit for your products.



SCHMIDT® ManualPress

From 1.6 kN to 22 kN

Efficient manufacturing requires appropriate means of production – not always automation. In particular, with small production runs, manual presses are often the most cost effective solutions.

We are continually developing the range of manual presses so that you can achieve your production targets. The expertise we have gained from our exposure to numerous production applications has been implemented in our new models. Therefore, we can offer a wide range of manual presses to suit all requirements.

Features

- Flexibility
 - Rapid changeover due to the easy and secure adjustment of the working height
 - Table tops with precision T-slot and precise alignment between the ram and table bores allow for accurate and repeatable set ups which reduces set-up times
 - The original position of the hand lever can be varied by 360°
 - Horizontal Pull (111/113)
 - Available for left-handed and right-handed use
 - The return stroke force of the ram can be adapted to different tool weights
- Precision
 - Alignment < 0.05 mm between upper and lower tool
- Maintenance-free
 - No lubrication necessary
- Long service life

Depending on the application, there is a wide selection of rack-and-pinion presses and toggle presses to choose from. Furthermore, a modular product design gives you the opportunity to choose the appropriate press for your application.



SCHMIDT® Rack-and-Pinion Presses

Constant force over the entire stroke

Do you need a long stroke and a constant force progression for assembly processes? Then, **SCHMIDT® Rack-and-Pinion Presses** are just the right choice.

Features

- Long stroke
- Linear force progression
- Precise adjustment of the press depth via hardened lower stop
- Honed ram guiding and ground rams provide a long service life and a precise guidance



Press Type 5





Press Type 3/6



Press Type 1/2

Press Head

No.1 and No. 2 have a ground guidance plate and teflon-coated adjustable gibs for precise and torsion-proof guidance.

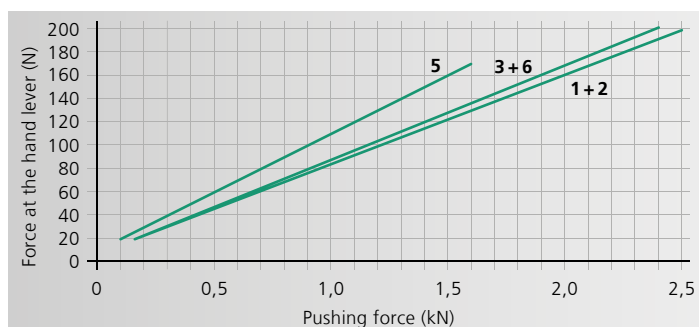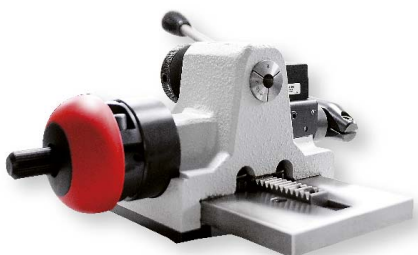

From 1.6 kN to 2.5 kN

Press Type			5	5R	3	3R	6	6R	1	1R	2	2R
Press head type			5	5R	3	3R	3	3R	1	1R	1	1R
Nominal force			kN	1.6	1.6	2.4	2.4	2.4	2.5	2.5	2.5	2.5
Working stroke			A	mm	0-40	17-40	0-70	18-70	0-70	18-70	0-80	26-80
Special strokes					0-160	18-100	0-160	18-100	0-100	26-100	0-100	26-100
Throat depth			C	mm	65	65	86	86	86	86	86	86
Press head height			S	mm	240	240	350	350	350	400	400	400
Ram bore			Ø	mm	10H7	10H7	10H7	10H7	10H7			
Collet (standard Ø10)			Ø	mm					1-17	1-17	1-17	1-17
Hand lever left					○	○	○	○	●	●	●	●
Angle of rotation/mm stroke					4.1°	4.1°	3.2°	3.2°	3.2°	2.2°	2.2°	2.2°
Max. weight of the upper tool ²⁾			kg		1.5	1.0	2.5	2.0	2.5	2.0	1.0	1.0
Return stroke lock ¹⁾												
Locked position 1			mm bef. BDC		11.5		13		13		19.5	
Locked position 2			mm bef. BDC		3.5		4.5		4.5		7	
Disengaging accuracy			mm		0.06		0.07		0.07		0.08	
Working height ³⁾			F									
Frame No. 13			mm	55-200	55-200							
Frame No. 3			mm			75-220	75-220		120-260	120-260		
Frame No. 2			mm					100-355	100-355		145-360	145-360
Frame No. 2-600 ○			mm			200-600	200-600	200-600	200-600	245-650	245-650	245-650
Frame No. 2-1000 ○			mm			330-1030	330-1030	330-1030	380-1080	380-1080	380-1080	380-1080
Weight			approx. kg	11	11	22	22	30	30	23	23	31

Accessories			5	5R	3	3R	6	6R	1	1R	2	2R
Mechanical counter				○	○	○	○	○	○	○	○	○
Throat depth frame (total depth) 111 mm, 131 mm, 160 mm, 200 mm					○	○	○	○	○	○	○	○
Additional fixture mounting plate suitable for throat depth frame					○	○	○	○	○	○	○	○
Micrometer stop				○	○	○	○	○				


Frame Overview	Press Type	Frame Height M without height adj. (mm)	Table Size B x T (mm)	Table Bore D (Ø mm)	Table Height K (mm)	Mounting Surface B x L (mm)
No. 13	5	330	110 x 80	20H7	46	110 x 185
No. 3	3, 1	400	150 x 110	20H7	60	150 x 260
No. 2	6, 2	536	185 x 110	20H7	60	185 x 280
No. 2-600	3, 6, 1, 2	810	200 x 160	20H7	98	200 x 290
No. 2-1000	3, 6, 1, 2	1250	200 x 160	20H7	98	200 x 290

Options

- Series with no additional charge ○ Additional charge applies
- ¹⁾ Adjustment of locking position on request
- ²⁾ The weight was determined with hand lever position 45° forward (guidelines)
- ³⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options

- Nickel plated - Cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint - Press and column can be painted to customer's color specification
- Bore for Adapting Tooling - Customer specific sizes can be supplied

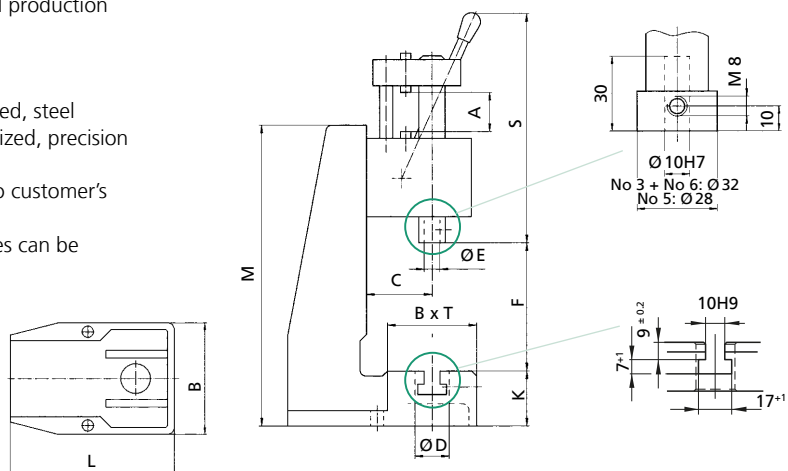

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® Toggle Presses

The high force at the end of stroke, just where it is important

Do you need a high force at the end of stroke for material transforming processes? Then, **SCHMIDT® Toggle Presses** are just the right choice.

Features



- High force at the end of stroke (see diagram below)
- Honed bores and ground rams provide a long service life and a precise guidance



Press Type 13RFZ



Press Type 11/14 -17R

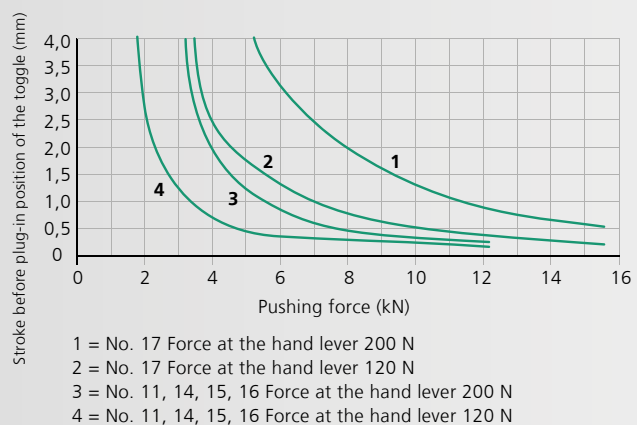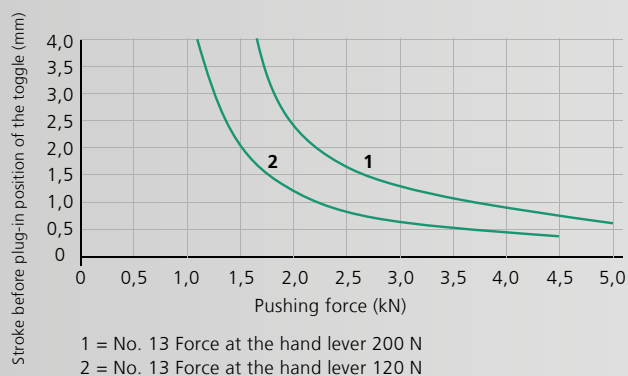

Maximum force will be reached just before extended position

From 5 kN to 15 kN

Press Type		13 13F	13R 13RF	11 11F	11R 11RF	15 15F	15R 15RF	14 14F	14R 14RF	16 16F	16R 16RF	17 17F
Press head type		13 - 40 13F - 35	13R - 40 13RF - 35	11 - 45 11F - 35	11R - 45 11RF - 35	11R - 45 11F - 35	11R - 45 11RF - 35	11 - 60 11F - 50	11R - 60 11RF - 50	11 - 60 11F - 50	11R - 60 11RF - 50	11 - 20 11F - 20
Nominal force	kN	5	5	12	12	12	12	12	12	12	12	15
Working stroke	A mm	25 - 40 25 - 35	40 35	0 - 45 0 - 35	20 - 45 20 - 35	0 - 45 0 - 35	20 - 45 20 - 35	60 50	24 - 60 24 - 50	60 50	24 - 60 24 - 50	0 - 20 0 - 20
Throat depth	C mm	65	65	86	86	86	86	86	86	86	86	86
Press head height	S mm	385 400	385 400	520 540	520 540	520 540	520 540	500 520	500 520	500 520	500 520	620 640
Ram bore	Ø mm	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7
Hand lever left		o		o		o		o		o		
Angle of rotation		95°	95°	110°	110°	110°	110°	125°	125°	125°	125°	90°
Max. weight upper tool ³⁾	kg	1.2/3.5 1.5/3	1.2/3.5 1.5/3	2/4.5 2.5/6	2/4 2/6	2/4.5 2.5/6	2/4 2/6	1.5/2.5 2/5	1.5/2.5 1.5/4	1.5/2.5 2/5	1.5/2.5 1.5/4	2.5/- 2.5/-
Return stroke lock ¹⁾												
Locked position 1	mm bef. DC		13.5		12		12		14		14	
Locked position 2	mm bef. DC		1.5		1.5		1.5		1.5		1.5	
Disengaging accuracy	mm		0.03		0.03		0.03		0.04		0.04	
Working height ⁴⁾	F											
Frame No. 13	mm	65 - 180 40 - 155	65 - 180 40 - 155									
Frame No. 3	mm			75 - 210 50 - 185	75 - 210 50 - 185			90 - 220 65 - 195	90 - 220 65 - 195			65 - 200 50 - 185
Frame No. 2	mm					100 - 345 80 - 325	100 - 345 80 - 325			110 - 360 85 - 335	110 - 365 85 - 335	
Frame No. 2-600 o	mm			200 - 585 175 - 560	200 - 585 175 - 560	200 - 585 175 - 560	200 - 585 175 - 560	210 - 595 185 - 570	210 - 595 185 - 570	210 - 595 185 - 570	210 - 595 185 - 570	200 - 585 175 - 560
Frame No. 2-1000 o	mm			330 - 1020 305 - 1000	330 - 1020 305 - 1000	330 - 1020 305 - 1000	330 - 1020 305 - 1000	340 - 1030 315 - 1010	340 - 1030 315 - 1010	340 - 1030 315 - 1010	340 - 1030 315 - 1010	330 - 1020 305 - 1000
Weight	approx. kg	12	12	23	24	29	29	24	24	29	29	23

Accessories		13 13F	13R 13RF	11 11F	11R 11RF	15 15F	15R 15RF	14 14F	14R 14RF	16 16F	16R 16RF	17 17F
Mechanical counter		o	o	o	o	o	o	o	o	o	o	o
Throat depth frame (total depth) 111 mm, 131 mm				o	o	o	o	o	o	o	o	
Additional fixture mounting plate suitable for throat depth frame		o	o	o	o	o	o	o	o	o		
Block clamping piece ²⁾		o	o	•	•	•	•	o	o	o	o	•


Frame Overview	Press Type	Frame Height M without height adj. (mm)	Table Size B x T (mm)	Table Bore D (Ø mm)	Table Height K (mm)	Mounting Surface B x L (mm)
No. 13	13	475	110 x 80	20H7	46	110 x 185
No. 3	11, 14, 17	540	150 x 110	20H7	60	150 x 260
No. 2	15, 16	700	185 x 110	20H7	60	185 x 280
No. 2-600	11, 14, 15, 16, 17	974	200 x 160	20H7	98	200 x 290
No. 2-1000	11, 14, 15, 16, 17	1410	200 x 160	20H7	98	200 x 290

Options

- Series with no additional charge o Additional charge applies
- ¹⁾ Adjustment of locking position on request
- ²⁾ Stroke reduction about 10 mm by version with additional charge
- ³⁾ The weight was determined with hand lever position 45° forward (guidelines)
- ⁴⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available Options

- Nickel plated – Cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – Press and column can be painted to customer's color specification
- Bores for Adapting Tooling – Customer specific sizes can be supplied

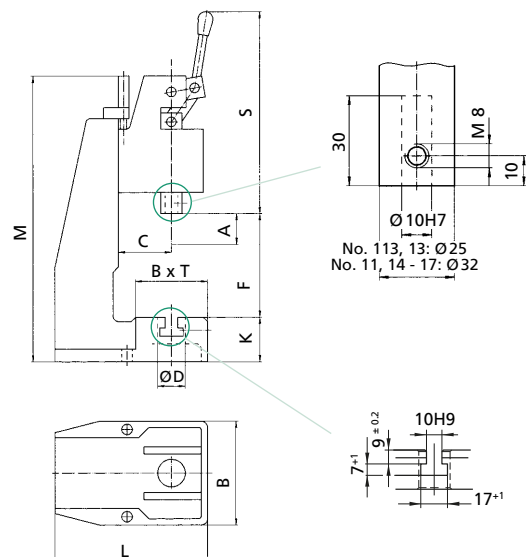

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® Toggle Presses with Horizontal Pull

The high force at the end of stroke, just where it is important

Do you need a high force at the end of stroke for material transforming processes? Then, **SCHMIDT® Toggle Presses** are just the right choice.

Features

- High force at the end of stroke (see diagram below)
- Honed bores and ground rams provide a long service life and a precise guidance





Press Type 113RFZ



Press Type 111RF

Ergonomic Press with horizontal pull

With press No. 113 and No. 111 the manual force is applied by pulling the lever towards the body. This press is especially suitable for rapid production at small forces. We supply press No. 111 including the ergonomic handle (standard scope of supply).

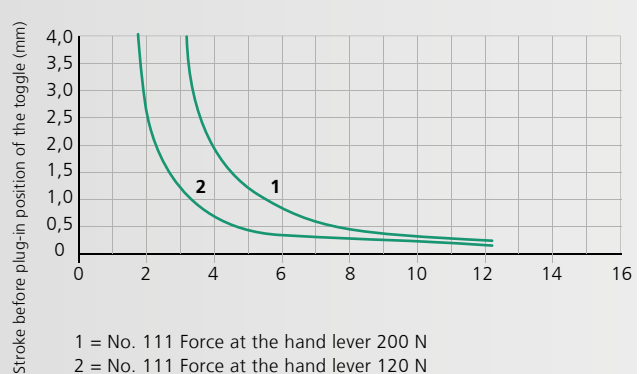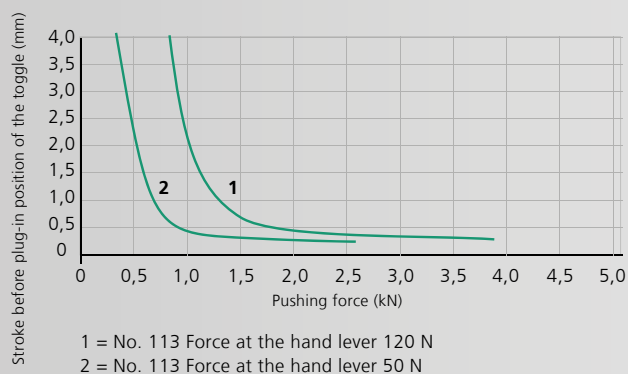

Maximum force will be reached just before extended position

From 2.5 kN to 12 kN

Press Type			113 113F	113R 113RF	111 111F	111R 111RF
Press head type			113 113F	113R 113RF	111 - 45 111F - 50	111R - 45 111RF - 50
Nominal force		kN	2.5	2.5	12	12
Working stroke	A	mm	0 - 28 0 - 28	22 - 28 22 - 28	0 - 45 50	24 - 45 24 - 50
Throat depth	C	mm	65	65	86	86
Press head height	S	mm	170 180	190 200	215 225	240 250
Ram bore	Ø	mm	10H7	10H7	10H7	10H7
Hand lever left			-	-	-	-
Angle of rotation			80°	80°	90°	90°
Max. weight upper tool ³⁾		kg	1/3 0.6/3	0.5/2.5 0.6/3	2.5/- 3/-	2.5/- 3/-
Return stroke lock ¹⁾						
Locked position 1		mm bef. BDC		12		14
Locked position 2		mm bef. BDC		0.5		1.5
Disengaging accuracy		mm		0.03		0.07
Working height ⁴⁾	F					
Frame No. 13		mm	50 - 165 40 - 155	50 - 165 40 - 155		
Frame No. 3		mm			120 - 205 105 - 195	120 - 205 105 - 195
Frame No. 2		mm			120 - 345 105 - 335	120 - 345 105 - 335
Frame No. 2-600 O		mm			200 - 580 185 - 570	200 - 580 185 - 570
Frame No. 2-1000 O		mm			330 - 1020 310 - 1000	330 - 1020 310 - 1000
Weight		approx. kg	11	11	28	28

Accessories	113 113F	113R 113RF	111 111F	111R 111RF
Mechanical counter	○	○	○	○
Throat depth frame (total depth) 111 mm, 131 mm			○	○
Additional fixture mounting plate suitable for throat depth frame			○	○
Block clamping piece ²⁾	● ○	● ○	● ○	● ○

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D (Ø mm)	Table Height K (mm)	Mounting Surface B x L (mm)
No. 13	113	475	110 x 80	20H7	46	110 x 185
No. 3	111	540	150 x 110	20H7	60	150 x 260
No. 2	111	700	185 x 110	20H7	60	185 x 280
No. 2-600	111	974	200 x 160	20H7	98	200 x 290
No. 2-1000	111	1410	200 x 160	20H7	98	200 x 290

Options

- Series with no additional charge ○ Additional charge applies

¹⁾ Adjustment of locking position on request



²⁾ Stroke reduction about 10 mm by version with additional charge

³⁾ The weight was determined with hand lever position 45° back (guidelines)

⁴⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options

- Nickel plated – Cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – Press and column can be painted to customer's color specification
- Bores for Adapting Tooling – Customer specific sizes

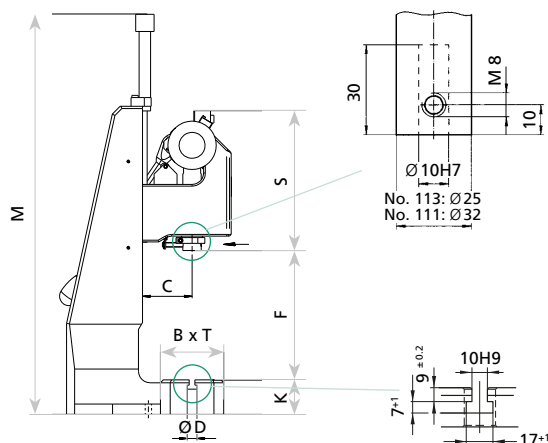

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® Toggle Presses with Square Ram

Optimum guidance and anti-rotation

Do you need a high force at the end of stroke for material-transforming processes? Then, **SCHMIDT® Toggle Presses** are just the right choice.

Features


- High force at the end of stroke
- Square ram is anti-rotational (no die sets required)
- Fully adjustable, play-free teflon-lined gibs



Press Type 11 VRFZ
13 VRFZ
14 VRFZ

Press Type 15 VF
16 VF

Press Type 19 VF

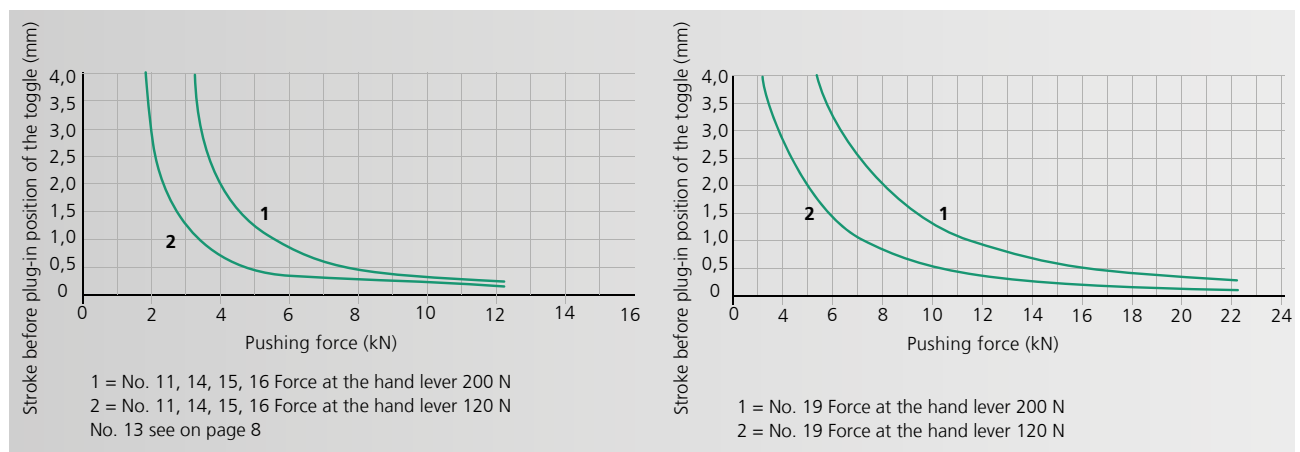

Maximum force will be reached just before extended position

From 5 kN to 22 kN

Press Type			13 V 13 VF	13 VR 13 VRF	11 V 11 VF	15 V 15 VF	11 VR 11 VRF	15 VR 15 VRF	14 V 14 VF	16 V 16 VF	14 VR 14 VRF	16 VR 16 VRF	19 V 19 VF	19 VR 19 VRF
Press head type			13V-40 13VF-40	13VR-40 13VRF-40	11V-45 11VF-45	11V-45 11VF-45	11VR-45 11VRF-45	11VR-45 11VF-45	11V-60 11VF-60	11V-60 11VF-60	11VR-60 11VRF-60	11VR-60 11VRF-60	19V-40 ¹⁾	19VR-40 ¹⁾
Nominal force		kN	5	5	12	12	12	12	12	12	12	12	22	22
Working stroke	A	mm	0-40 15-40	26-40 26-40	0-45 25-45	0-45 0-45	20-45 25-45	20-45 25-45	0-60 0-60	0-60 0-60	28-60 30-60	28-60 30-60	0-40 0-40	10-40 10-40
Throat depth	C	mm	65	65	86	86	86	86	86	86	86	86	131	131
Press head height	S	mm	385 400	385 400	510 530	510 530	510 530	510 530	510 530	510 530	510 530	510 530	620 620	620 620
Ram bore	Ø	mm	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	10H7	20H7	20H7
Hand lever left			○		○	○			○	○			●	●
Angle of rotation			95°	95°	110°	110°	110°	110°	125°	125°	125°	125°	175°	175°
Max. weight top tool ³⁾		kg	1.2/4 2/3.5	1.2/4 2/3.5	1.6/4.2 2/5	1.6/4.2 2/5	1.6/4.2 2/5	1.6/4.2 2/5	1/3.5 1/3.5	1/3.5 1/3.5	1/3.5 1/3.5	1/3.5 1/3.5	2/- 2/-	2/- 2/-
Return stroke lock ²⁾														
Locked position 1	mm bef. BDC			14.5			12	12			14	14		4.5
Locked position 2	mm bef. BDC			1.5			1.5	1.5			1.5	1.5		0.9
Disengaging accuracy	mm			0.03			0.03	0.03			0.04	0.04		0.02
Working height ⁴⁾	F													
Frame No. 13	mm		65-180 50-165	65-180 50-165										
Frame No. 3	mm				80-210 60-190		80-210 60-190		80-210 60-190		80-210 60-190			
Frame No. 2	mm				105-350 85-330		105-350 85-330		105-350 85-330		105-350 85-330			
Frame No. 2-600 ○	mm				200-585 185-570		200-585 185-570		210-590 195-575		210-590 195-575			
Frame No. 2-1000 ○	mm				330-1020 315-1000		330-1020 315-1000		340-1030 325-1015		340-1030 325-1015			
Frame No. 19	mm												90-220	90-220
Frame No. 19-400 ○	mm												160-400	160-400
Frame No. 19-500 ○	mm												260-550	260-550
Weight	approx. kg		12	12	24	32	24	32	24	32	24	32	85	85

Accessories	13 V 13 VF	13 VR 13 VRF	11 V 11 VF	15 V 15 VF	11 VR 11 VRF	15 VR 15 VRF	14 V 14 VF	16 V 16 VF	14 VR 14 VRF	16 VR 16 VRF	19 V 19 VF	19 VR 19 VRF
Mechanical counter	○	○	○	○	○	○	○	○	○	○	○	○
Throat depth frame 111 mm, 131 mm		○	○	○	○	○	○	○	○			
Throat depth frame 151 mm											○	○
Additional fixture mounting plate suitable for throat depth frame			○	○	○	○	○	○	○	○	○	○


Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D (Ø mm)	Table Height K (mm)	Mounting Surface B x L (mm)
No. 13	13	475	110 x 80	20H7	46	110 x 85
No. 3	11, 14	540	150 x 110	20H7	60	150 x 260
No. 2	15, 16	700	185 x 110	20H7	60	185 x 280
No. 2-600 ○	15, 16	974	200 x 160	20H7	98	200 x 290
No. 2-1000 ○	15, 16	1410	200 x 160	20H7	98	200 x 290
No. 19	19	640	200 x 160	25H7	112	200 x 370
No. 19-400 ○	19	840	250 x 200	40H7	145	250 x 460
No. 19-500 ○	19	1000	250 x 200	40H7	145	250 x 480

Options

- Series with no additional charge ○ Additional charge applies
- ¹⁾ Special strokes 12 mm and 50 mm on request
- ²⁾ Adjustment of locking position on request
- ³⁾ The weight was determined with hand lever position 45° forward (guidelines)
- ⁴⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options


- Nickel plated – Cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – Press and column can be painted to customer's color specification
- Bores for Adapting Tooling – Customer specific sizes

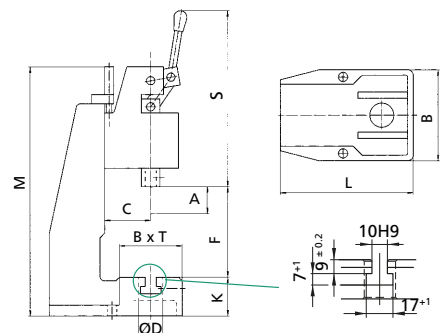

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® ManualPress

Options suitable for your application

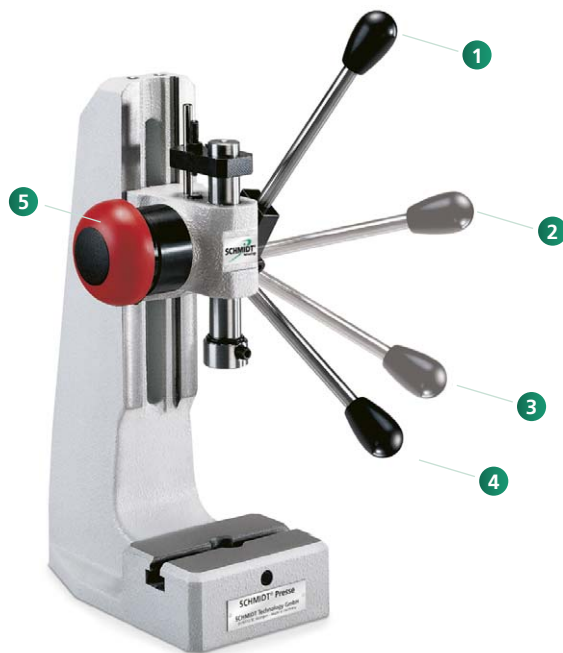

The return stroke lock guarantees reaching the required pressing depth with every stroke

- 1 TDC (Top Dead Center) position
- 2 First locking position: Loose tools can still be aligned
- 3 Second locking position before BDC (Bottom Dead Center). From here you can only continue to BDC.
- 4 After reaching BDC (Bottom Dead Center) by completing the stroke the return stroke lock is released. This guarantees a repeatable BDC and thus a constant press depth
- 5 The emergency button releases the locking function in any position



The micrometer screw serves as stop for the rack and pinion presses

A micrometer adjustable stop specially developed for presses for the fine adjustment of the BDC. The robust and precise design ensures the repeatability of the stop, no matter how many strokes are taken.



Fine adjustment with micrometer scale for Toggle Presses

By loosening the tensioning screw 1 and turning the adjusting nut 2 with the same tool, the setting of the BDC can be adjusted infinitely. Graduation is in the 0.02 mm line to line range and is reached rapidly and precisely.

SCHMIDT® ManualPress

Options suitable for your application



Mechanical counter

A four digit counter monitors the number of pieces produced. The counter is provided with a reset function.



Collet

For the rack-and-pinion presses No. 1 and No. 2, collet bore diameter of 1 to 17 mm.



Throat extension block

We offer various sizes for extended throat depths.



Special fixture mounting plates

Special fixture tabletops, designed in conjunction with throat extension blocks, provide ram to table bore alignment when spacer is used.



Ergonomic left-handed design

With most press types, lefthanded or left-/right-handed design is an available option.



Upper tooling adapter

Adapter for tools with a diameter of 5 - 20 mm.



Nickel plated design

Press frames and cast parts are electroless nickel-plated, steel components are black oxide finished, aluminum parts are anodized, precision steel surfaces are untreated.



Ergonomic handle

Swivelling handle for discharge of the wrist; easy and flexible assembly on the hand lever.



Press base

Plastic (250 x 340 mm), including fasteners.



Stop clamp

For Toggle Presses.

How to order

Order key for press options

R = incl. return stroke lock with emergency release

F = incl. fine adjustment (for toggle presses)

Z = incl. mechanical counter

M = micrometer screw (for rack-and-pinion presses)

RF = incl. return stroke lock with emergency release and fine adjustment

Order example

No. 3 R = SCHMIDT® Rack-and-Pinion Press No. 3
incl. return stroke lock with emergency release

or

No. 13 RFZ = SCHMIDT® Toggle Press No. 13
incl. return stroke lock with emergency release,
fine adjustment and mechanical counter

SCHMIDT® ManualPress 300 Series

Manual Presses with Process Monitoring

Process reliability, force/stroke monitoring of the joining process and EN ISO-compatible documentation of the results are becoming the major factors for small and medium production within the manual workplace.

Process reliability – not just a slogan

The system software allows easy setup of quality control criteria for 100 % in-process monitoring.

The **SCHMIDT® ManualPress 300 Series** system with **SCHMIDT® PressControl 600** includes:

- Integrated reliable measuring technology
- High resolution of the obtained process data
- Graphical and numerical output of the processing results
- Quality monitoring using freely selectable tolerances



Assembly system with patented return stroke lock and programmable clutch.

SCHMIDT® ManualPress 300 Series





Process reliability for manual workplaces, force range 0.4 kN to 12 kN

Features

- Linear force progression for No. 305 and No. 307
- High force at the end of stroke for No. 311
- Precise adjustment of the press depth via micrometer fine adjustment
- Guides require little maintenance, have little wear and are locked against anti-rotation. This results in precise working and a long service life
- Optimum fit and form closure due to dovetail guide on the press head
- Quick set-up
 - Exact alignment of ram bore to the table of 0.05 mm
 - Height adjustment using a crank
 - Precision bores in ram and column base plate

Functional components


- Electronic stroke lock
- Integrated transducer
 - Force sensor
 - Incremental encoder
- Integrated signal amplifier
- Programmable overload coupling

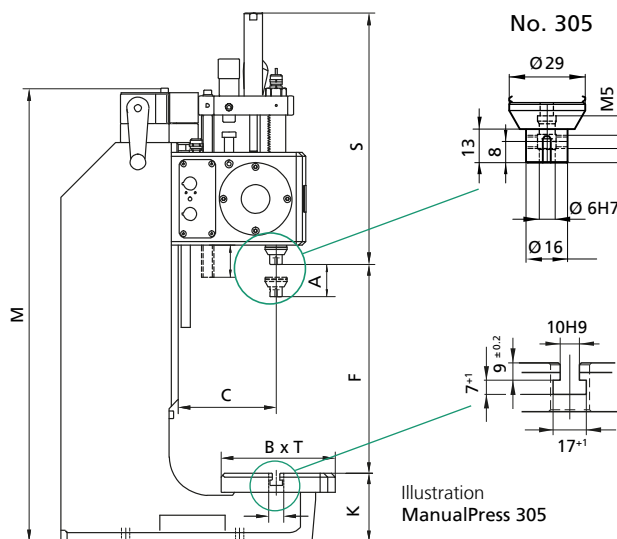

Press Type		305	307	311
Nominal force	kN	0.4	4	12
Force at the hand lever	approx. N	50	200	200
Working stroke	A mm	0 - 42	0 - 54	0 - 50 ¹⁾
Throat depth	C mm	129	129	129
Press head height	S mm	310	417	555
Ram bore	Ø mm	6H7	10H7	10H7
Stroke fine adjustment	mm	0.02	0.02	0.02
Stroke resolution	mm	0.005	0.005	0.005
Angle of rotation/mm stroke		3.3°	4.8°	non linear
Resolution, process data acquisition	stroke µm/inc force N/inc	5 0.125	5 1.25	5 3.5
Working height ⁵⁾	F			
Frame No. 7-420	mm	60-420	50-410	50-290
Frame No. 7-600 ³⁾	mm	90-600	80-600	80-480
Max. Weight upper tool ⁴⁾	kg	0.6	1	1.3
Weight	approx. kg	41	41	60
Protection type		IP 54	IP 54	IP 54

Accessories				
Stronger return assist spring		<input type="radio"/>	<input type="radio"/>	
Speed control		<input type="radio"/>	<input type="radio"/>	
Throat depth frame ²⁾³⁾ (total depth)		<input type="radio"/>	<input type="radio"/>	

ManualPress 311

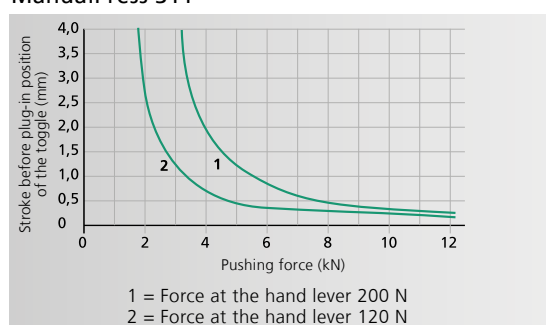

Maximum force will be reached just before extended position

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table bore D Ø mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 7-420	305, 307, 311	740	180 x 150	20H7	90	220 x 362
No. 7-600	305, 307, 311	960	180 x 280	20H7	110	220 x 465 - 505

Options

- Additional charge applies
- ¹⁾ The fine adjustment increases the working stroke by 3mm
- ²⁾ Throat depth frame only available with frame No. 7-600
- ³⁾ Increased throat and higher frame lead to smaller nominal forces for No. 311
- ⁴⁾ The weight was determined with hand lever position 45° forward (guidelines)
- ⁵⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available Options:

- Nickel plated – cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom paint – press and column can be painted to customer's color specification
- Bores for adapting tooling – customer specific sizes can be supplied

SCHMIDT® ManualPress 300 Series

Process reliability for Manual Workplaces

ManualPress 300 Series included with the control unit
SCHMIDT® PressControl 600

- Force/stroke monitoring of the entire pressing operation
 - Allows for extensive error analysis
- Process reliability:
 - Separation of the power flow
 - Utilizing the interface of external sensors and actuators, the clutch is engaged once the workpieces are placed properly.
 - Locking of the press with failed parts
 - Secure separation and acknowledgement of Pass and Fail ("Poka Yoke")
- Freely programmable positioning, stopping and braking in forward and return stroke and end position.
 - Process intervention
 - Quality monitoring
 - Reduction of error costs and elimination of errors
- Short changeover times due to preselection of stored working profiles



Forward Stroke Lock Mode (the return Stroke is released)
For protecting the produced parts and the force sensor of the press the press blocked/restricts the force flow in forward stroke when reaching a defined force or when reaching the stroke.




Return Stroke Lock Mode (the forward Stroke is released)
Press blocks the return stroke when the necessary force has not been reached or the required stroke has not been reached. This ensures that the user always completes the operation.

SCHMIDT® ManualPress 300 Series

Examples of verified process workplaces

Both examples below can be combined arbitrarily when taking into account the maximum available inputs and outputs.

In addition, the functions of the different operating modes are available, which can be freely parameterized or programmed for special functions.

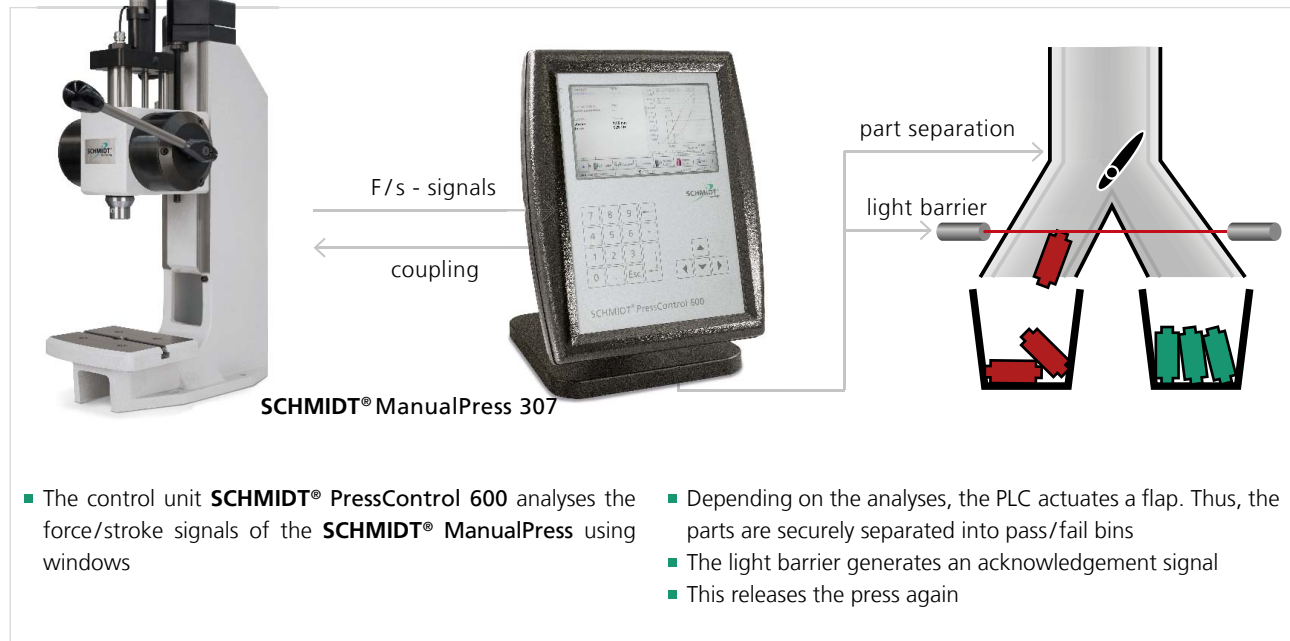

SCHMIDT® ManualPress 300 Series

Options suitable for your application



Control mounting bracket

Used for fastening the **SCHMIDT® PressControl 600**, either mounted to the table or to the wall. The mounting bracket permits the unit to swivel 70° (included with control).



External reset button

We recommend an external reset button in rough production environments.




Calibration tool

The calibration tool is a clamping device with which a constantly defined force is applied to the load cell of the **SCHMIDT® ManualPress Serie 300 Series**. In order to complete calibration, either a **SCHMIDT® LoadCheck** or a customer supplied calibration device is required. Photo on left side shows the device for the **SCHMIDT® ManualPress 305**. The right side is for **SCHMIDT® ManualPress 307**. The **SCHMIDT® ManualPress 311** is being calibrated by using the fine adjustment mechanism in BDC.



CANopen Compact box

With this add-on up to 16 digital combination in-/outputs (8 in- and 8 outputs) are provided, useable optionally as in- or output.

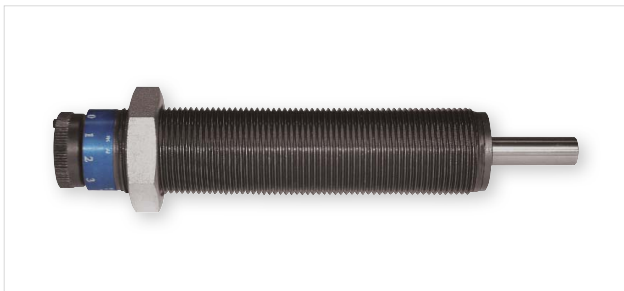

Speed control

To reach a very high repeatability by pressing on force and stroke, a speed control can be inserted optionally instead of the micrometer screw, which brakes the pressing process shortly before achievement of the end position.



Ergonomic handle

Swivelling handle for discharge of the wrist; easy and flexible assembly on the hand lever.



Press base

Plastic (250 x 340 mm), incl. fasteners.

SCHMIDT® PneumaticPress

Maximum pressing force from 1.6 kN to 60 kN

The **SCHMIDT® PneumaticPress** range consists of a modular system suitable for transforming, joining and assembling operations optimally within the pressing capacities of 1.6 – 60 kN.


With the addition of the **SCHMIDT® PressControl 75** or **600** and the optional process monitoring, these presses become EC type-approved, CE-conformed workstations. Therefore these press systems can be used in either single cycle mode or automatic mode.

The application determines the selection of the press system. Consideration is given to the flexible design of the assembly location taking into account the ergonomic and safety aspects. These characteristics are achieved by means of a finely adjusted, modular type product range. The efficiency and increased process reliability of these press systems have been proven many thousands of times, in single applications, semi-automated assembly systems and have been integrated into automated production lines.



SCHMIDT® PneumaticPress

Example of a system design with a direct acting press

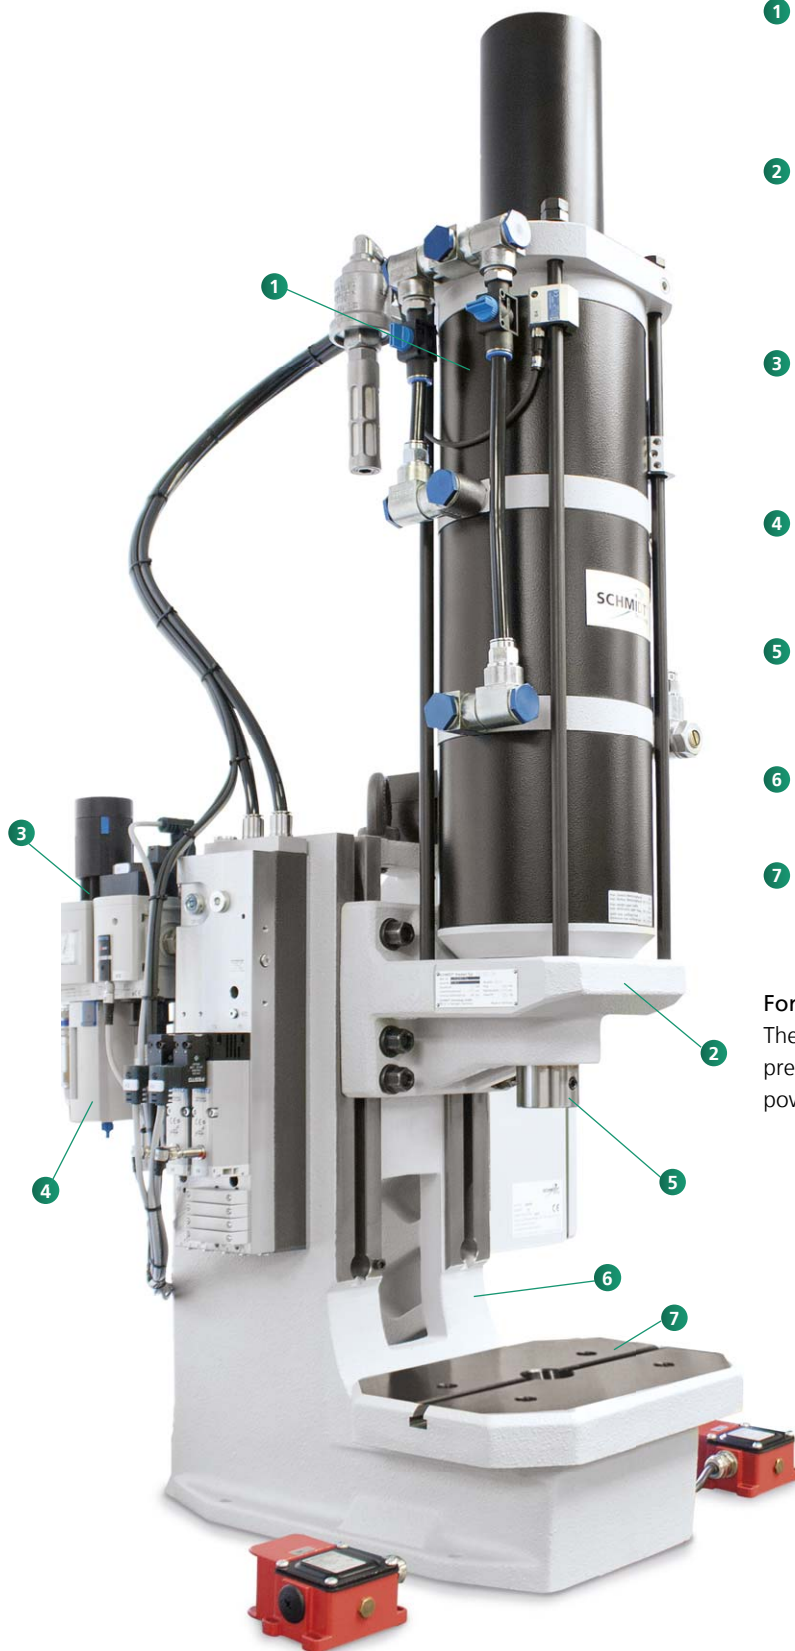

1 Cylinder unit

Maintenance-free specially developed for the assembly technology; with flow control for speed regulation of the down-stroke.

2 Press Head unit

The working height can be rapidly and accurately adjusted due to the height adjustment's ease of use. Can be used without the frame as processing station in automated installations.

3 Pneumatic control package

Two-channel pneumatic package (as shown) is based on a modular valve block, designed to operate with filtered, non-lubricated air, supply pressure range of 3 – 6 bar.

4 Force control

The press force output can easily be controlled via a separate pressure regulator and pressure gauge (not shown).

5 Ram

With precision bore for tool holding and built-in adjustable stop.

6 Frame

With precision machined press head guide rails.

7 Fixture mounting plate

With precision T-slot and bore for tool location.

Force output preselector (optional)

The press force output can easily be controlled via a separate pressure regulator and pressure gauge. The pressure for the power stroke can be reduced to 1 bar

SCHMIDT® PneumaticPress

Principle of operation

Functional description considering the example of a 3-chamber pneumatic cylinder

In working stroke, three pistons **7** connected by the piston rod **6** are pressurized with compressed air via the air connection **1** and move downward. The air below the pistons exhausts from the cylinder chambers via the depressurized connection **2** and the breather vents **3** and **4**. The ram **5** extends up to the maximum working stroke.

In return stroke, the upper cylinder chambers are depressurized via the connection **1** and only the bottom piston is pressurized with compressed air via the air connection **2**. Ambient air enters in both remaining cylinder chambers via the breather vents **3** and **4**. The ram with the three pistons moves upward.


This construction has the same effect as a parallel connection of three cylinders. Thus, a powerful working stroke is achieved with a compact design as well as an economic use due to the low air consumption in the return stroke.

The stroke can be limited by setting the Stroke Limit Block **8** to an approximate, desired position. The gap between Stroke Limit Block and Stroke Fine Adjustment **9** now determines the maximum stroke that the ram can travel. In order to fine-tune this stroke, the stop screw **9** can be adjusted.

All direct acting presses have a built-in permanent magnet **10**. This magnet facilitates sensing of the ram position via tie rod mounted sensors.

Features

- Optimally adapted to individual requirements due to its modular design
- Process optimization by means of adjustable parameters (stroke, force, speed)
- Easy adaptation to different tool and part heights because of simplistic stroke and height adjustment
- Additional safety measures when using heavy tools due to the optional device for retention of ram in home position
- End position control via cylinder switches as signal transmitter for peripheral processes
- Low noise level (< 75 dBA)
- Double-acting, wear-resistant cylinders with low air consumption for the return stroke
- High flexibility due to short changeover time
- Long service life and high precision due to wear-resistant Teflon coated bushings at top and bottom of cylinder
- Precision ground ram
- Precision double ram guides

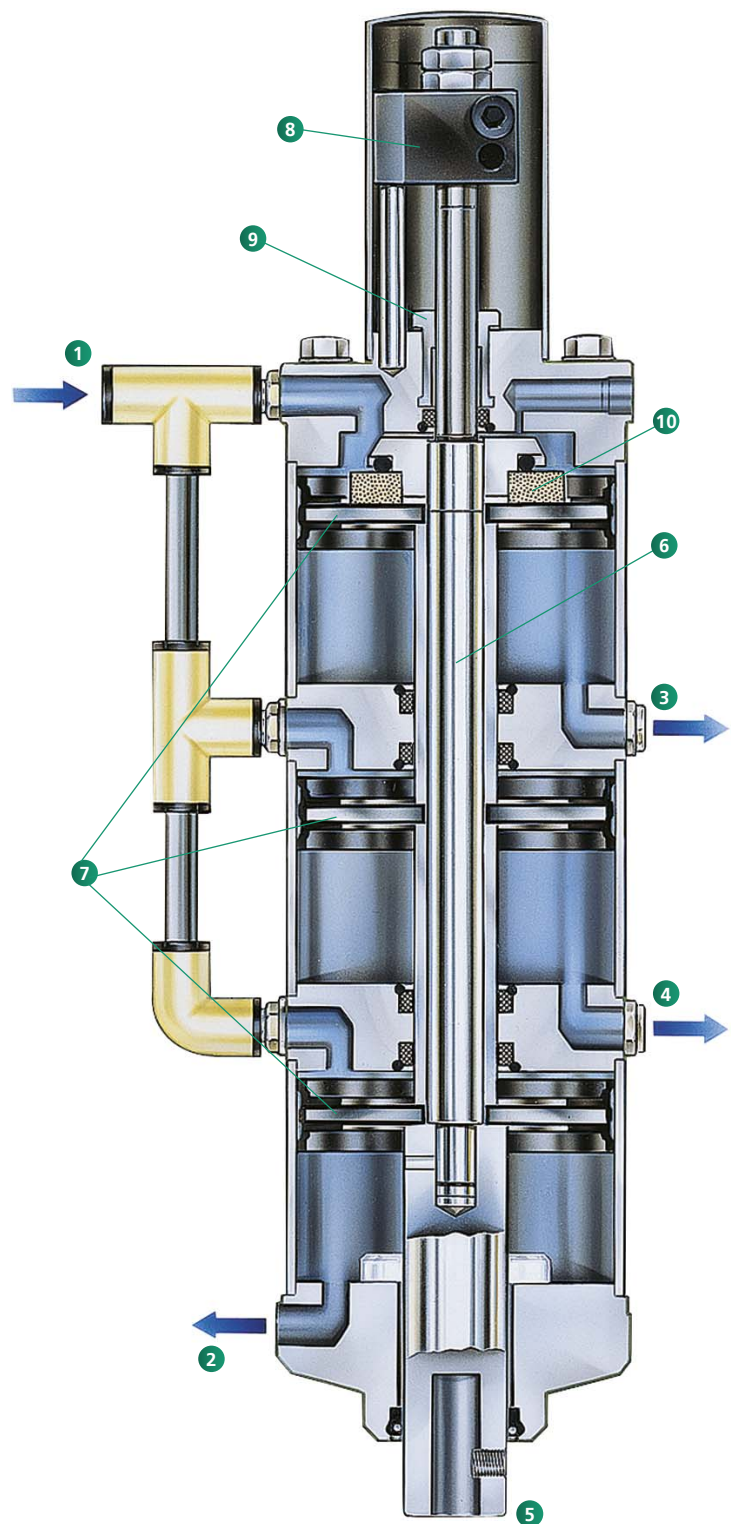


SCHMIDT® PneumaticPress

Direct acting with constant force over the entire stroke

Features

- Round anti-rotational ram
- Adjustable ram position in BDC by means of precision lower stop (1 division line = 0.05 mm) on scale
- T-slot with locking set screw in fixture mounting plate

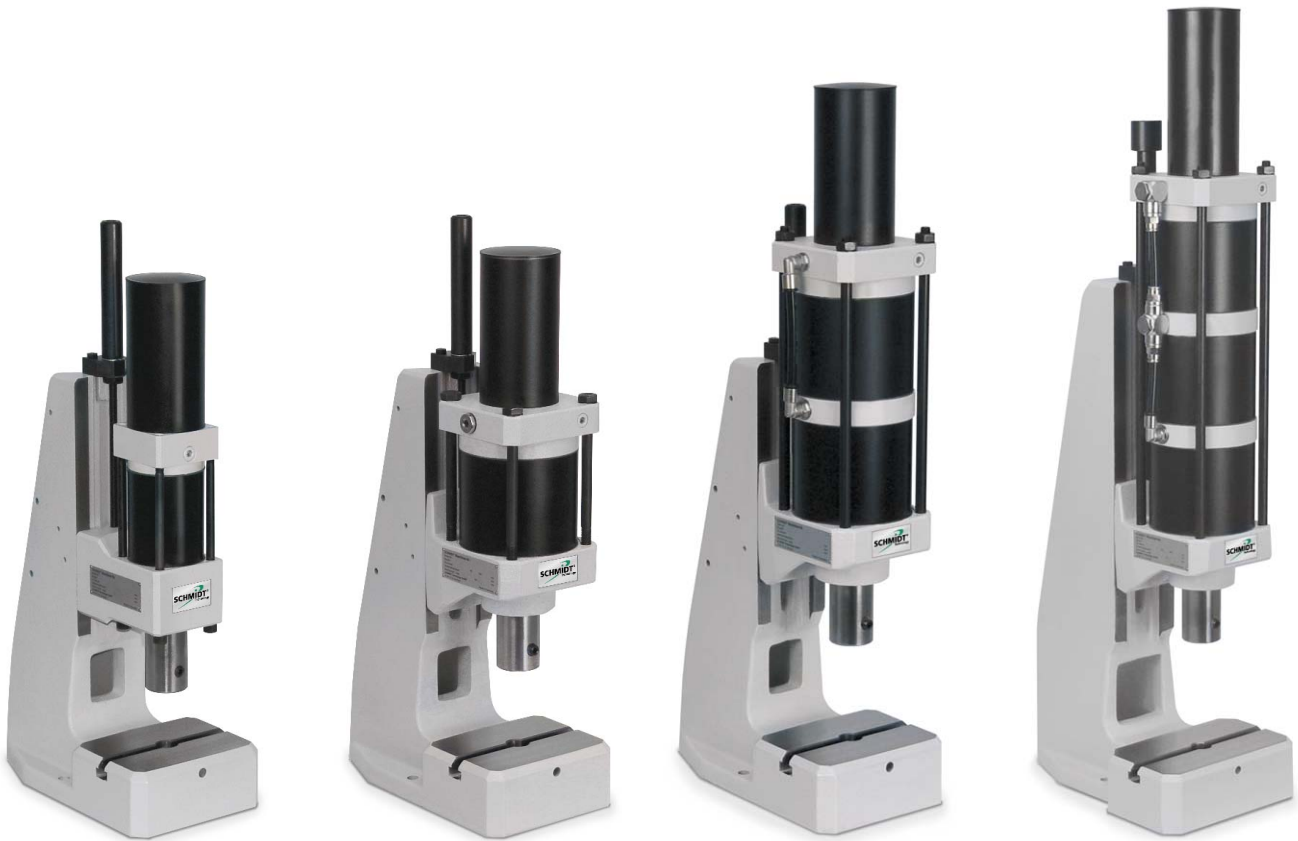

Press Type 20


Press Type 23

Press Type 24

Press Type 25



Pneumatic cylinder
with piston and magnet kit
for ram position via cylinder
switch.

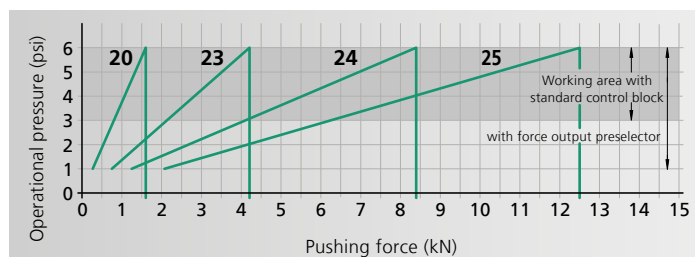

From 1.6 kN to 12.5 kN

Press Type			20	23	24	25
Working stroke	A	mm	50, 75 100, 125 160, 200 250, 300	50, 75 100, 125 160, 200 250, 300	50, 75 100, 125 160	50, 75 100
Nominal force at 6 bar		kN	1.6	4.2	8.4	12.5
Throat depth	C	mm	86	86	86	86
Throat depth frame ϕ		mm	111, 131 160, 200	111, 131 160, 200	111, 131 160, 200	111, 131
Additional fixture mounting plate suitable for throat depth frame			ϕ	ϕ	ϕ	ϕ
Ram bore	\emptyset	mm	20H7	20H7	20H7	20H7
Ram diameter	\emptyset	mm	40	40	40	40
Working height ¹⁾	F					
Frame No. 3		mm	80-220	90-210	90-210	90-210
Frame No. 2 ϕ		mm	110-360	120-350	120-350	120-350
Frame No. 2-600 ϕ		mm	200-600	210-580	210-580	210-580
Frame No. 2-1000 ϕ		mm	330-1040	335-1020	335-1020	335-1020
Weight		approx. kg	30	35	40	45
Flange model			20-FL	23-FL	24-FL	25-FL
Cylinder	Z	\emptyset mm	69	106	106	106
Flange	FL	\emptyset mm	110	140	140	140
Width across flats	SW	mm	80	112	112	112
Centering shoulder	ZA	\emptyset mm	60	68	68	68

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D \emptyset mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 3	20, 23, 24, 25	540	150 x 110	20H7	60	150 x 260
No. 2	20, 23, 24, 25	700	185 x 110	20H7	60	185 x 280
No. 2-600 ϕ	20, 23, 24, 25	974	200 x 160	20H7	98	200 x 290
No. 2-1000 ϕ	20, 23, 24, 25	1410	200 x 160	20H7	98	200 x 290

Options

ϕ Additional charge applies



¹⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options

- Nickel plated – cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – press and column can be painted to customer's color specification
- Bore for adapting tooling – customer specific sizes can be supplied

Bottom View of the Press Head, Flange Model

Mounting drill pattern flange/ram

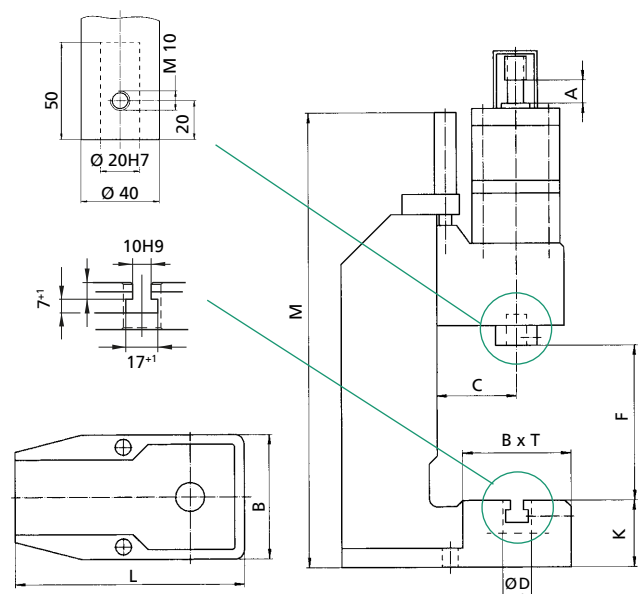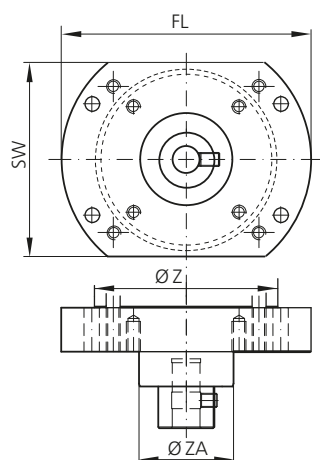

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® PneumaticPress

Direct acting with constant force over the entire stroke

Features

- Round anti-rotational ram
- Adjustable ram position in BDC by means of precision lower stop (1 division line = 0.05 mm) on scale



Press Type 27





Press Type 29



Precision lower stop



Height adjustment
Fast, accurate setting of the work height.

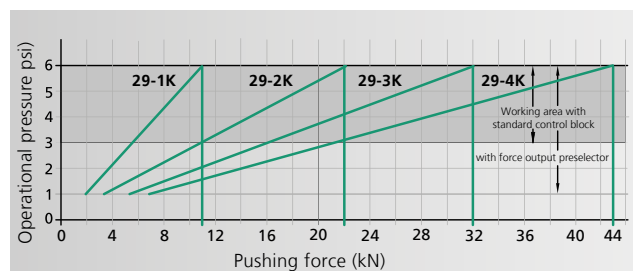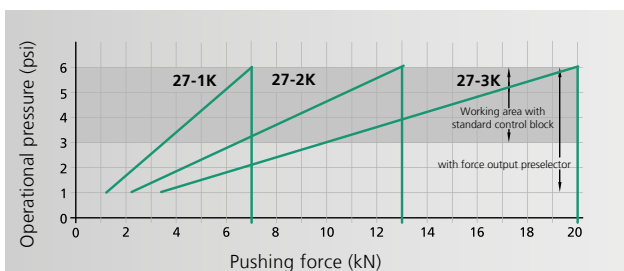

From 7 kN to 43 kN

Press Type			27-1K	27-2K	27-3K	29-1K	29-2K	29-3K	29-4K
Working stroke	A	mm	50, 75, 100 160, 200 250, 300	50, 75 100, 125 160, 200	50, 75 100, 125 160	50, 75 100, 160 200, 300	50, 75 100, 125 160, 200	50, 75 100, 125 160	50, 75 100
Nominal force at 6 bar		kN	7	13	20	11	22	32	43
Throat depth	C	mm	131	131	131	140	140	140	140
Throat depth frame o		mm	151	151	151	160, 185	160, 185	160, 185	160
Additional fixture mounting plate suitable for throat depth frame			o	o	o	o	o	o	o
Ram bore	Ø	mm	20H7	20H7	20H7	20H7	20H7	20H7	20H7
Ram diameter	Ø	mm	40	40	40	50	50	50	50
Working height ¹⁾	F								
Frame No. 34		mm	90-270	90-270	90-270				
Frame No. 301 o		mm	160-400	160-400	160-400				
Frame No. 301-500 o		mm	310-550	310-550	310-550				
Frame No. 29		mm				80-290	80-290	80-290	80-290
Frame No. 29-500 o		mm				150-500	150-500	150-500	150-500
Frame No. 29-600 o		mm				250-600	250-600	250-600	250-600
Weight (standard)	approx. kg		85	85	85	120	120	120	120
Flange model			27-1K-FL	27-2K-FL	27-3K-FL	29-1K-FL	29-2K-FL	29-3K-FL	29-4K-FL
Cylinder	Z	Ømm	132	132	132	170	170	170	170
Flange	FL	Ømm	180	180	180	220	220	220	220
Width across flats	SW	mm	140	140	140	180	180	180	180
Centering shoulder	ZA	Ømm	68	68	68	80	80	80	80

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 34	27	630	200 x 160	25H7	111	200 x 370
No. 301	27	830	250 x 200	40H7	145	250 x 460
Frame No. 301-500 o	27	990	250 x 200	40H7	145	250 x 480
Special fixture mounting plate with 3 longitudinal slots o			300 x 220 400 x 230	40H7 40H7		
Frame No. 29	29	690	300 x 220	40H7	141	300 x 460
Frame No. 29-500 o	29	990	300 x 220	40H7	166	300 x 540
Frame No. 29-600 o	29	1110	300 x 220	40H7	166	300 x 565
Special fixture mounting plate with 3 longitudinal slots o			355 x 225 400 x 230	40H7 40H7		



¹⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Options

o Additional charge applies

Other available options

- Nickel plated – cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – press and column can be painted to customer's color specification
- Bores for adapting tooling – customer specific sizes can be supplied

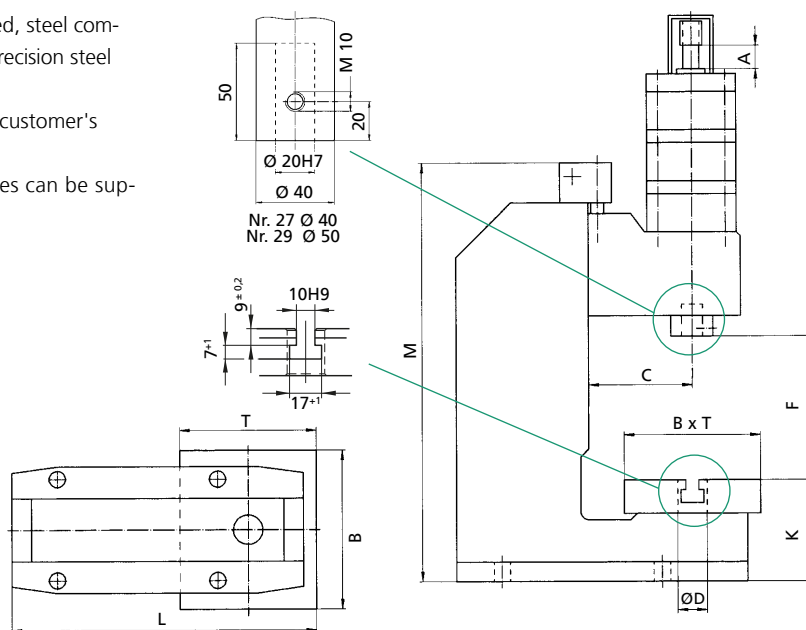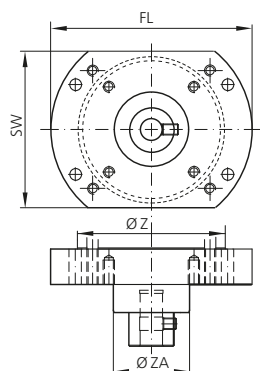

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® PneumaticPress

Pneumatic Toggle Presses with maximum force at the end of stroke

Features

- Cross hole with locking screw in the press table for safe fixture of tool
- Accurate adjustable ram position via fine adjustment (type 33)
- T-slot with set screw in fixture mounting plate to secure bottom tool



Press Type 32




Press Type 33



Fine adjustment
for press No. 33 with scale
1 division line = 0.02 mm.



Flexible stroke adjustment
reduces the air consumption
for shorter strokes.

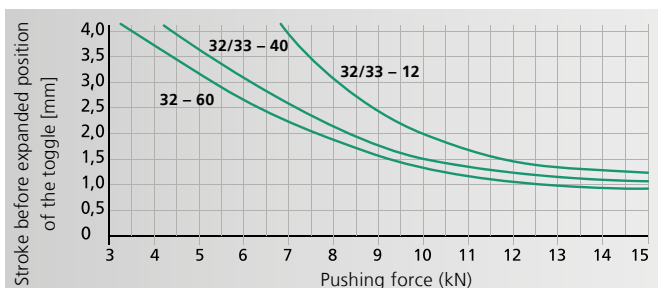

Up to 15 kN

Press Type			32	33
Working stroke	A	mm	0-12 4-40 6-60	0-12 4-40
Nominal force at 6 bar		kN	15	15
Throat depth	C	mm	86	86
Throat depth frame o		mm	111, 131	111, 131
Additional fixture mounting plate suitable for throat depth frame			o	o
Ram bore	Ø	mm	20H7	20H7
External ram dimensions	Ø	mm	40	40
Fine adjustment				•
Working height ¹⁾	F			
Frame No. 3		mm	90-210	
Frame No. 2		mm	120-340	70-290
Frame No. 2-600 o		mm	210-580	160-530
Frame No. 2-1000 o		mm	340-1020	290-970
Weight		approx. kg	45	50


Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø (mm)	Table Height K (mm)	Mounting Surface B x L (mm)
No. 3	32	540	150 x 110	20H7	60	150 x 260
No. 2	32, 33	700	185 x 110	20H7	60	185 x 280
Frame No. 2-600 o	32, 33	810	200 x 160	20H7	98	200 x 290
Frame No. 2-1000 o	32, 33	1248	200 x 160	20H7	98	200 x 290

Options

- Series standard with no additional charge
- o Additional charge applies
- ¹⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options

- Nickel plated – cast parts are electroless nickel plated, steel components black oxide finished, aluminum anodized, precision steel surfaces are untreated
- Custom Paint – press and column can be painted to customer's color specification
- Bores for adapting tooling – customer specific sizes can be supplied

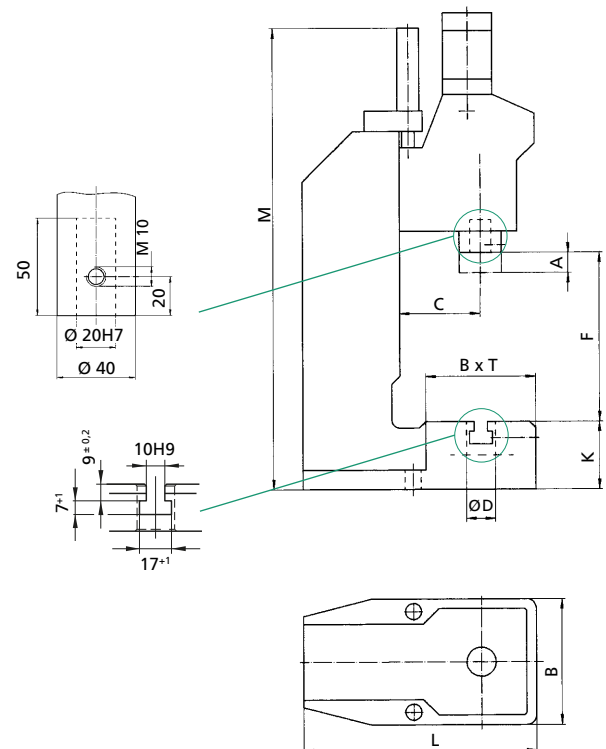


Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® PneumaticPress

Pneumatic Toggle Presses with maximum force at the end of stroke

Features

- Anti-rotational square ram with fully adjustable, Teflon lined gibs for precise travel, no die set required
- Exact positioning due to fine adjustment scale (1 division line = 0.05 mm)

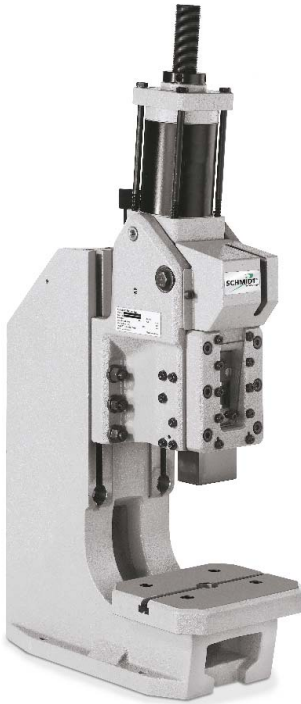

Press Type 34



Press Type 36




Square ram



Fine adjustment

Pushing Force Diagram

Operational pressure: 6 bar

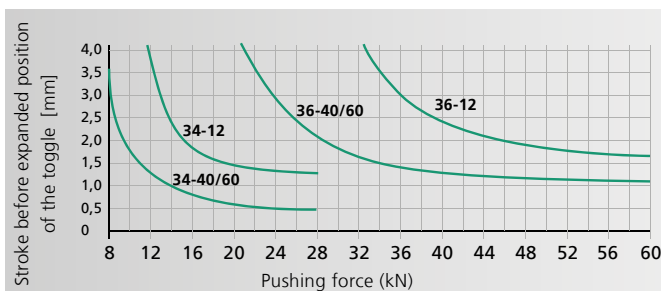

From 28 kN to 60 kN

Press Type			34	36
Working stroke	A	mm	0-12	0-12
			4-40	4-40
			6-60	6-60
Nominal force at 6 bar		kN	28	60
Throat depth	C	mm	131	160
Throat depth frame \emptyset		mm	151, 170	185
Fixture mounting plate suitable for throat depth frame			\emptyset	\emptyset
Ram bore	\emptyset	mm	20H7	20H7
External ram dimensions	G x H	mm	36 x 63	46 x 86
Working height ¹⁾		F		
Frame No. 34		mm	100-250	
Frame No. 301		mm	160-400	
Frame No. 301-500		mm	310-550	
Frame No. 35		mm		100-250
Frame No. 35-500		mm		150-500
Frame No. 35-600		mm		250-600
Weight		approx. kg	90	150

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D \emptyset mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 34	34	630	200 x 160	25H7	111	200 x 370
No. 301	34	830	250 x 200	40H7	145	250 x 460
No. 301-500	34	990	250 x 200	40H7	145	250 x 480
Special fixture mounting plate with 3 longitudinal slots \emptyset			300 x 220 400 x 230	40H7		
No. 35	36	700	300 x 220	40H7	141	300 x 480
No. 35-500	36	990	300 x 220	40H7	166	300 x 560
No. 35-600	36	1110	300 x 220	40H7	166	300 x 585
Special fixture mounting plate with 3 longitudinal slots \emptyset			355 x 225 400 x 280	40H7		


Options

\emptyset Additional charge applies

¹⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Other available options

- Nickel plated – cast parts are electroless nickel plated, steel components black oxide finished, aluminium anodized, precision steel surfaces are untreated
- Custom Paint – press and column can be painted to customer's color specification
- Bores for adapting tooling – customer specific sizes can be supplied

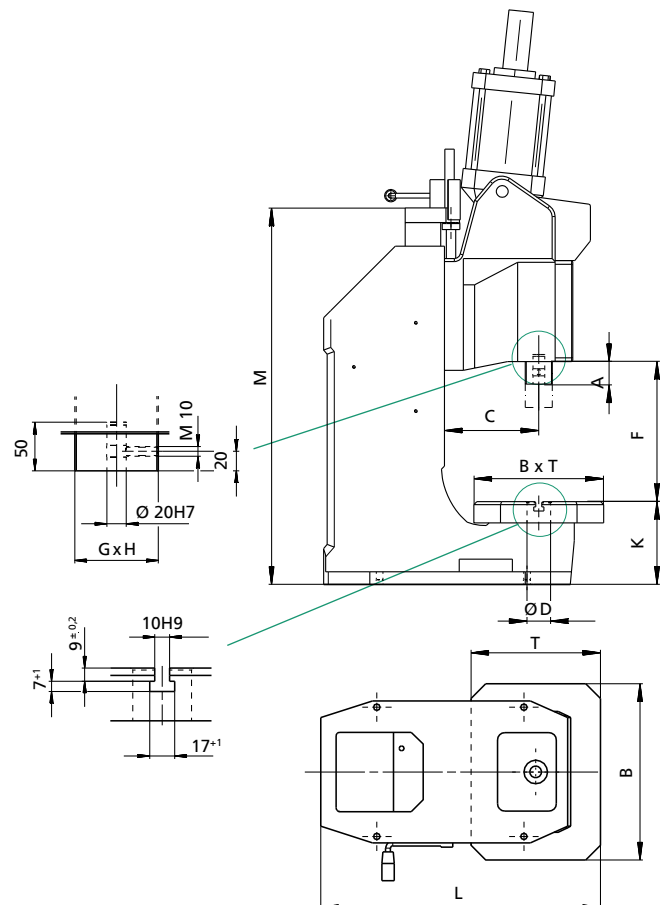

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® PneumaticPress

Direct acting Pneumatic Presses with force/stroke monitoring

SCHMIDT® PneumaticPresses with force/stroke monitoring are offered as complete system with control unit **SCHMIDT® Press-Control 600**. These systems are characterized by sensors and signal amplification integrated in the press head. These signals are evaluated in real time.

Features



- Direct forces are measured due to the force sensor integrated in the ram. Insensitive against side loads
- Force and displacement sensors are immune to EMI and environmental contamination
- A measuring data amplification integrated in the press head provides short transmission paths of unamplified signals
- Anti-rotational square ram with two fully adjustable guiding gibs for precise work, also with tools without guide (not for **type 320**, here special anti-twist protection in the roller-guided round ram)



Press Type 323, 327, 329



Press Type 320

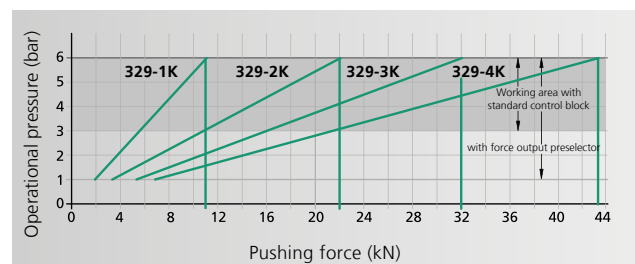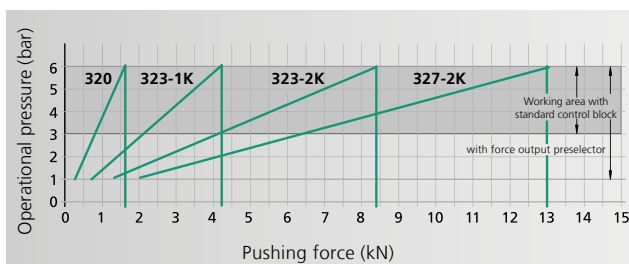

Press Type			320	323-1K	323-2K	327-2K	327-3K	329-2K	329-3K	329-4K
Working stroke	A	mm	100	50, 75, 100, 125, 150	50, 75, 100	50, 75, 100, 125, 150	50, 75, 100	50, 75, 100, 150	50, 75, 100, 125, 150	50, 75, 100
Nominal force at 6 bar		kN	1.6	4.2	8.4	13	20	22	32	43
Resolution, process data acquisition										
- stroke		µm/inc	5	5	5	5	5	5	5	5
- force		N/inc	0.5	1.25	2.5	4	6.25	6.25	10	12.5
Throat depth	C	mm	129	131	131	131	131	160	160	160
Throat depth frame o		mm		151	151	151	151			
Fixture mounting plate suitable for throat depth frame				o	o	o	o			
Ram bore	Ø	mm	20H7	20H7	20H7	20H7	20H7	20H7	20H7	20H7
External ram dimensions	G x H	mm	Ø 40	70 x 50	70 x 50	70 x 50	70 x 50	90 x 60	90 x 60	90 x 60
Working height ¹⁾	F									
Frame No. 7-420		mm	50-420							
Frame No. 7-600 o		mm	85-600							
Frame No. 301		mm		140-350	140-350	140-350	140-350			
Frame No. 301-500 o		mm		310-500	310-500	310-500	310-500			
Frame No. 329		mm						130-300	130-300	130-300
Frame No. 329-460 o		mm						190-460	190-460	190-460
Weight (standard)		approx. kg	70	170	170	170	170	320	325	330

Simply the best! | 33

Calculation of the air consumption

The air consumption per stroke is calculated in normal litres (NL)¹⁾ at a working pressure of 6 bar.

The entire consumption consists of a constant and a variable part that depends on the stroke.

SCHMIDT® PneumaticPress air consumption per stroke

At 6 bar in normal litres (NL)

Press Type	Constant	Variable (per mm Stroke) ⁴⁾	Air Connection ³⁾
20	= max. stroke / 50 mm x 1 NL	0.02 NL	G 1/4"
23	= max. stroke / 50 mm x 2.5 NL	0.05 NL	G 1/4"
24	= max. stroke / 50 mm x 2.5 NL	0.1 NL	G 1/4"
25	= max. stroke / 50 mm x 2.5 NL	0.15 NL	G 1/4"
27-1K	= max. stroke / 50 mm x 4 NL	0.08 NL	G 3/8"
27-2K	= max. stroke / 50 mm x 4 NL	0.16 NL	G 3/8"
27-3K	= max. stroke / 50 mm x 4 NL	0.24 NL	G 3/8"
29-1K	= max. stroke / 50 mm x 6.5 NL	0.13 NL	G 1/2"
29-2K	= max. stroke / 50 mm x 6.5 NL	0.26 NL	G 1/2"
29-3K	= max. stroke / 50 mm x 6.5 NL	0.39 NL	G 1/2"
29-4K	= max. stroke / 50 mm x 6.5 NL	0.52 NL	G 1/2"
320	= max. stroke / 50 mm x 1 NL	0.02 NL	G 1/4"
323-1K	= max. stroke / 50 mm x 2.5 NL	0.05 NL	G 1/4" 3)
323-2K	= max. stroke / 50 mm x 2.5 NL	0.1 NL	G 1/4" 3)
327-2K	= max. stroke / 50 mm x 4 NL	0.16 NL	G 1/2" 3)
327-3K	= max. stroke / 50 mm x 4 NL	0.32 NL	G 1/2" 3)
329-2K	= (max. stroke +25 mm) / 50 mm x 6.5 NL	0.26 NL	G 1/2" 3)
329-3K	= (max. stroke +25 mm) / 50 mm x 6.5 NL	0.39 NL	G 1/2" 3)
329-4K	= (max. stroke +25 mm) / 50 mm x 6.5 NL	0.52 NL	G 1/2" 3)
32-12	1 NL	0.09 NL	G 1/4"
32-40	1.5 NL	0.045 NL	G 1/4"
32-60	2 NL	0.035 NL	G 1/4"
33-12	1 NL	0.09 NL	G 1/4"
33-40	1.5 NL	0.045 NL	G 1/4"
34-12	1.5 NL	0.12 NL	G 1/4"
34-40	2.2 NL	0.08 NL	G 1/4"
34-60	3 NL	0.06 NL	G 1/4"
36-12	4 NL	0.36 NL	G 3/8"
36-40	6 NL	0.2 NL	G 3/8"
36-60	8 NL	0.18 NL	G 3/8"

Total consumption = constant consumption (liter)²⁾ + variable consumption (liter)

Variable consumption = air consumption per mm of stroke (liter/mm)²⁾ X working stroke (mm)

SCHMIDT® HydroPneumaticPress air consumption per stroke

At 6 bar in normal litres (NL)

Press Type Standard	Rapid Stroke/Return Stroke (constant)	Power Stroke per mm (variabel)	Air Connection ³⁾
61-50-6 / 361-50-6	2 NL	1.25 NL	G 1/4"
61-100-12 / 361-100-12	4 NL	1.9 NL	G 1/4"
62-50-6 / 362-50-6	3 NL	1.85 NL	G 1/4"
62-100-12 / 362-100-12	6 NL	2.6 NL	G 1/4"
65-50-6 / 365-50-6	5 NL	2.1 NL	G 1/4"
65-100-12 / 365-100-12	10 NL	3.1 NL	G 1/4"
64-50-6 / 364-50-6	8 NL	4 NL	G 1/2"
64-100-12 / 364-100-12	16 NL	6 NL	G 1/2"
68-50-6 / 368-50-6	8 NL	3.2 NL	G 1/2"
68-100-12 / 368-100-12	16 NL	5.2 NL	G 1/2"
74-50-6 / 374-50-6	8 NL	4 NL	G 1/2"
74-100-12 / 374-100-12	16 NL	6 NL	G 1/2"
76-100-12 / 376-100-12	26 NL	10 NL	G 1/2"

Total consumption = constant consumption (liter)²⁾ + variable consumption (liter)

Variable consumption = air consumption per mm of stroke (liter/mm)²⁾ X working stroke (mm)

¹⁾ The air volume is measured under standard conditions (1.013 x 10⁵ pascal = 1 atm and a temperature of 25 °Celsius [298 Kelvin])

²⁾ Value according to table ³⁾ For presses with force/stroke monitoring, the air connection refers to the two-channel control block used by us

⁴⁾ For the determination of the consumption, the single stroke is used, the return stroke is automatically contained in the result

SCHMIDT® HydroPneumaticPress

Maximum force range from 15 kN to 220 kN

The **SCHMIDT® HydroPneumaticPress** range consists of a modular system suitable for transforming, joining and assembling optimally within the pressing force range 15 – 220 kN.

With the addition of the **SCHMIDT® PressControl 75** or **600** and the optional process monitoring, these presses become EC type-approved, CE-conformed workstations. Therefore these press systems can be used in either single cycle mode or automatic mode.

The application determines selection of the press system. Consideration is given to the flexible design of the assembly location taking into account the ergonomic and safety aspects. These characteristics are achieved by means of a finely adjusted, modular type product range. The efficiency and increased process reliability of these press systems have been proven many thousands of times, in single applications, semi-automated assembly systems and have been integrated into automated production lines.




SCHMIDT® HydroPneumaticPress

System design



- ① **Cylinder unit**
Hydro pneumatic
- ② **Air throttle rapid approach stroke**
For speed control of the downstroke
- ③ **Press head unit**
The working height can be rapidly and accurately adjusted due to the height adjustment's ease of use. Can be used without the frame as processing station in automated installations
- ④ **Pneumatic control package**
Two-channel pneumatic package (as shown) is based on a modular valve block
- ⑤ **Force output preselector**
The press force output can easily be controlled via a separate pressure regulator and pressure gauge. The pressure for the power stroke can be reduced to 1 bar
- ⑥ **Square ram**
Square ram with fully adjustable, Teflon lined gibs for precise travel, precision machined bore
- ⑦ **Frame**
With precision machined press head guide rails (for No. 68 and 368 designed as dovetail guide)
- ⑧ **Fixture mounting plate**
With precision T-slot and bore for tool location




Stroke feedback

Ram with key-ways for switch target pieces for an inductive position feedback. Optional: Stroke-dependent activation of the power stroke by means of the proximity switch.

SCHMIDT® HydroPneumaticPress

Principle of operation

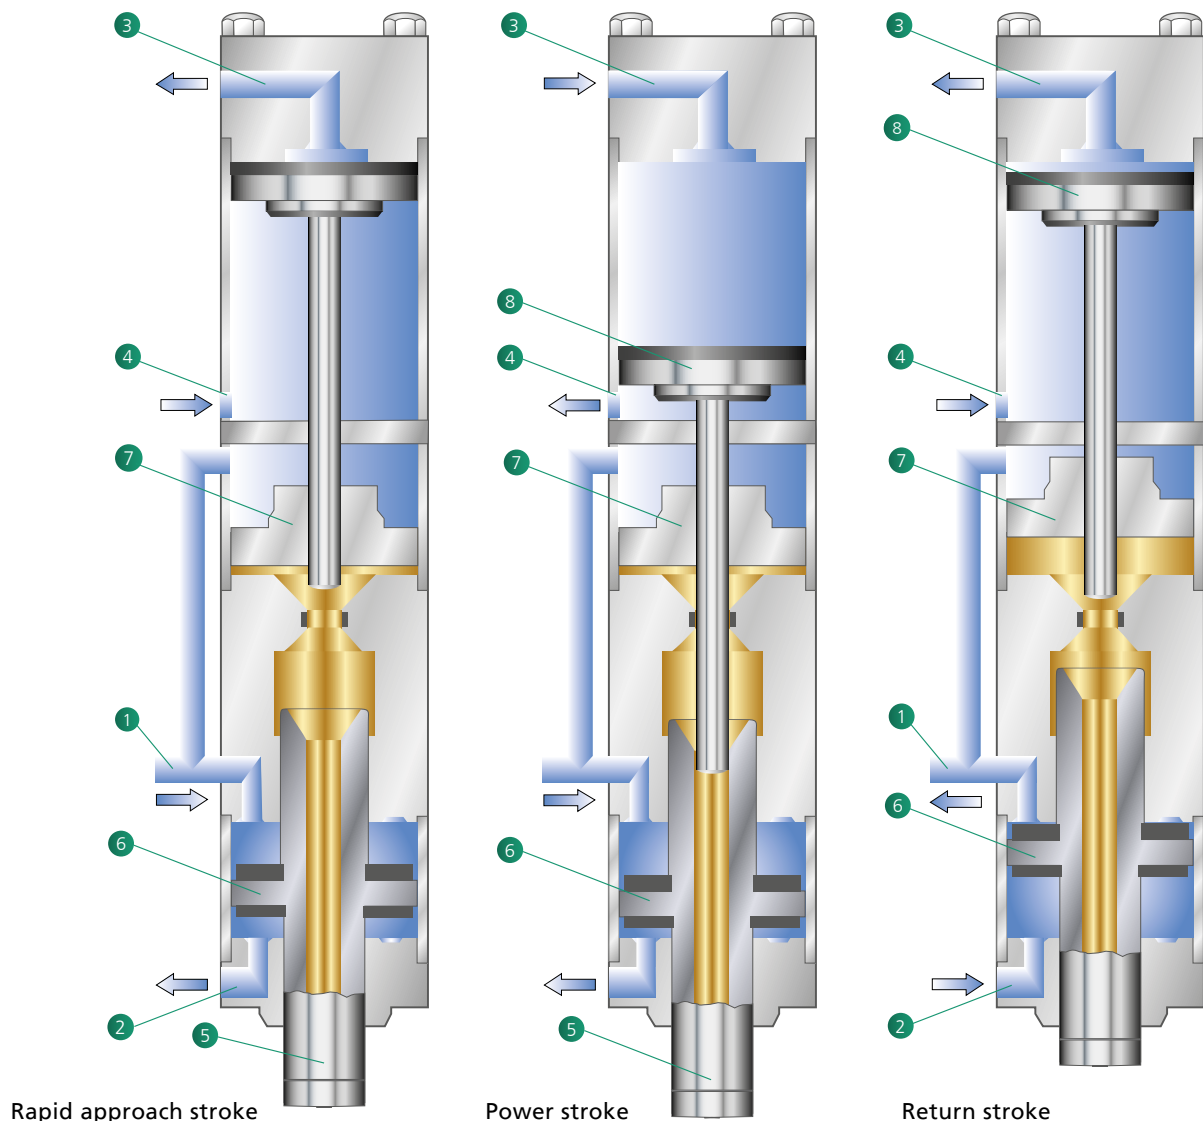

Rapid approach stroke

In rapid approach stroke, the air connections 1 and 4 are pressurized with compressed air. The air connections 2 and 3 are depressurized. The approach stroke piston 6 and the reservoir piston 7 are moving with low force until the ram 5 encounters resistance.

Power Stroke

If the ram 5 encounters resistance, a valve switches the compressed air from 4 to connection 3, and the power stroke piston 8 moves downwards. A rod enters the high pressure cylinder, separating the hydraulic oil between reservoir piston 7 and approach stroke piston 6. The ram 5 moves out with boosted force.

Return Stroke

For the return stroke, the connections 1 and 3 are depressurized, and the connections 2 and 4 are pressurized. Approach stroke 6 and power stroke piston 8 move back simultaneously. After the hydraulic connection between approach 6 and reservoir piston 7 oil flows back into the reservoir, moving the reservoir piston into its home position.

Features

- Optimally adapted to individual requirements due to its modular design
- High flexibility and economic efficiency due to short changeover times
- Easy and accurate positioning of tools due to the precise alignment between ram bore and the ground fixture mounting plate.
- The force output preselector allows reducing the pressure for the power stroke to 1 bar. This reduces the nominal press force to 1/6 of the maximum force.
- The end positions of the ram can be sensed via the inductive proximity switches.
- No mechanical compression spring in the cylinder of the hydro-pneumatic system, providing a long service life
- Low maintenance resulting in high productivity
- Long service life and precision due to maintenance-free guides
- Tool protection due to smooth switchover from rapid approach stroke to power stroke
- Additional safety when using heavy tools due to the optional ram drift lock device for retention of ram in home position.
- Low noise level (< 75 dBA)

SCHMIDT® HydroPneumaticPress

C-Frame design

Features

- The C-Frame design offers full accessibility when manually inserting and removing parts
- Easy adaptation to different tool and part heights because of simplistic height adjustment with angular gear
- Anti-rotational square ram with fully adjustable, Teflon lined gibs for precise travel. No die set required
- High precision due to long precise guides of the square ram




Press type 61/62




Press type 65


Rapid approach stroke

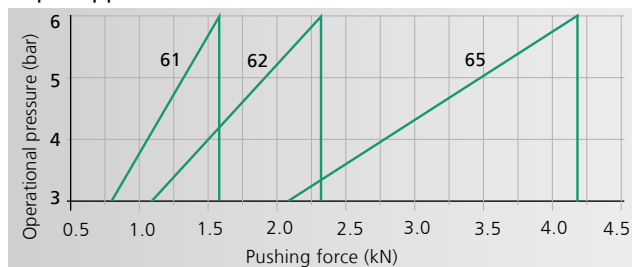

Power stroke

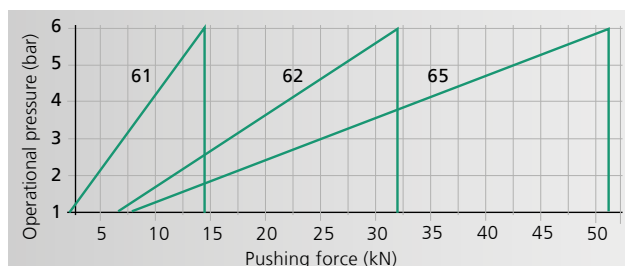


Adjustable switch target pieces for position detection via an inductive position sensor



Square ram

with bilaterally adjustable, play-free gibs, precision machined bore with set screw for mounting of tooling.

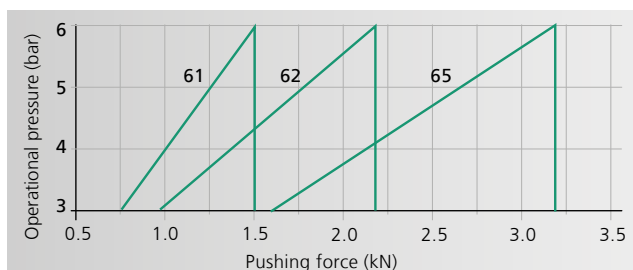

Operational pressure < 3 bar: can only be operated with press force preselector!

From 15 kN to 52 kN in power stroke

Press Type			61	62	65
Total stroke - Power stroke ¹⁾		mm	50-6, 100-12	50-6, 100-12	50-6, 100-12
Nominal force at 6 bar		kN	15	30	52
Throat depth	C	mm	131	131	160
Throat depth frame \circ		mm	151	151	185
Fixture mounting plate suitable for throat depth frame			\circ	\circ	\circ
Ram bore	\varnothing	mm	20H7	20H7	20H7
External ram dimensions	G x H	mm	36 x 63	36 x 63	46 x 86
Working height ²⁾	F				
Frame No. 34		mm	100-250	100-250	
Frame No. 301 \circ		mm	160-400	160-400	
Frame No. 301-500 \circ		mm	310-550	310-550	
Frame No. 35		mm			80-235
Frame No. 35-500 \circ		mm			150-500
Frame No. 35-600 \circ		mm			250-600
Weight (standard)	approx. kg		95	110	160


Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D \varnothing mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 34	61, 62	630	200 x 160	25H7	111	200 x 370
No. 301	61, 62	830	250 x 200	40H7	145	250 x 460
No. 301-500	61, 62	990	250 x 200	40H7	145	250 x 480
Special fixture mounting plate with 3 longitudinal slots \circ			300 x 220 400 x 230	40H7		
No. 35	65	700	300 x 220	40H7	141	300 x 480
No. 35-500	65	990	300 x 220	40H7	166	300 x 560
No. 35-600	65	1110	300 x 220	40H7	166	300 x 585
Special fixture mounting plate with 3 longitudinal slots \circ			355 x 225 400 x 280	40H7		

Options

\circ Additional charge applies

¹⁾ Special models total stroke/power stroke on request

²⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

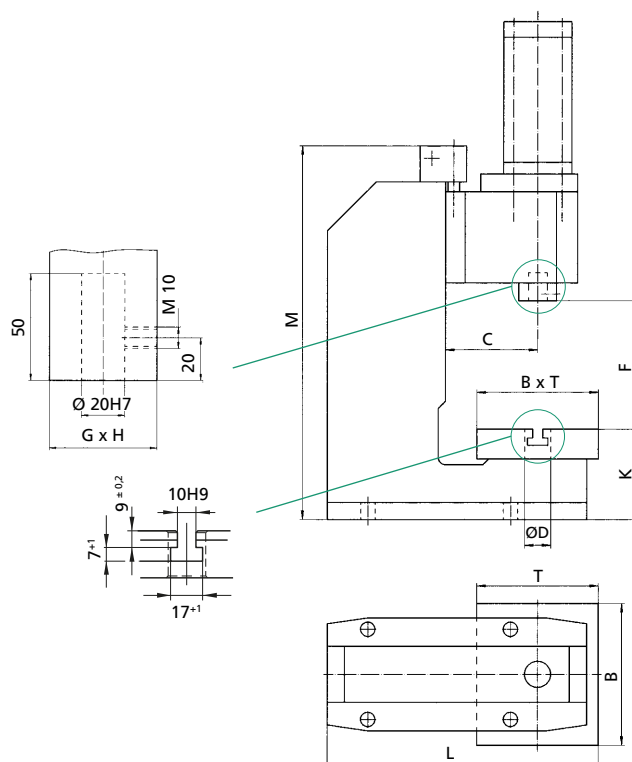

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® HydroPneumaticPress

C-Frame design with welded press frame

Features

- The welded press frame offers highest stability
- Space-saving and compact due to separate working cylinder for press No. 68



Press type 68




Press type 64



Square ram

with bilaterally adjustable, play-free gibs, precision machined bore with set screw for mounting of tooling. Some models feature additional provisions for tooling adaption.


Rapid approach stroke

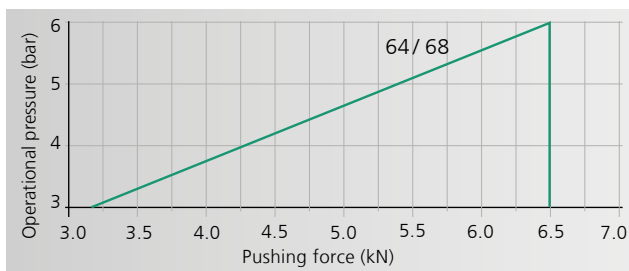


Fixture mounting plate

(for Press No. 64) with 3 T-slots and precision machined bore for tool location.

Power stroke

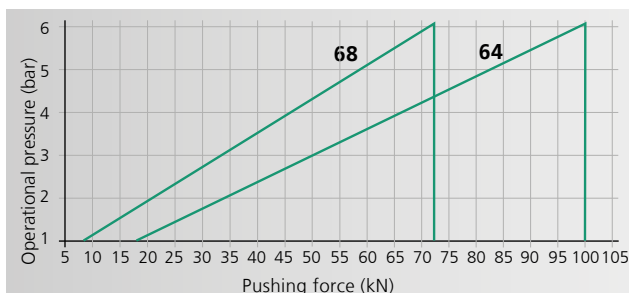

Return stroke

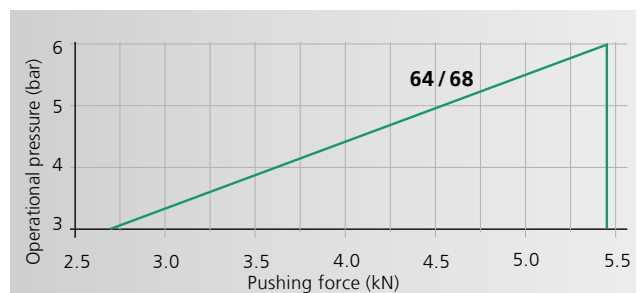

Operational pressure < 3 bar: can only be operated with press force preselector!

From 72 kN to 100 kN in power stroke

Press Type			64	68
Total stroke - Power stroke ¹⁾		mm	50-6, 100-12	50-6, 100-12
Nominal force at 6 bar		kN	100	72
Throat depth	C	mm	160	160
Ram bore	E	Ø mm	25H7	20H7
External ram dimensions	G x H	mm	60 x 90	60 x 90
Working height ³⁾	F			
Frame No. 64		mm	180-350	
Frame No. 64-600 o		mm	430-600	
Frame No. 68 ²⁾		mm		130-300
Frame No. 68/5 ²⁾ o		mm		190-460
Weight (standard)		approx. kg	420	350

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 64	64	940	400 x 290	40H7	185	400 x 625
No. 64-600 o	64	1200	400 x 290	40H7	185	400 x 685
No. 68 ²⁾	68	810	300 x 230	40H7	147	300 x 550
No. 68/5 ²⁾ o	68	990	300 x 230	40H7	147	300 x 620
Special fixture mounting plate with 3 longitudinal slots o			400 x 280 500 x 280	40H7		

Options

o Additional charge applies

¹⁾ Special models total stroke/power stroke on request


²⁾ Frame 68/5 required for 30 mm power stroke

³⁾ Typical values; can vary ± 3 mm due to casting and production tolerances



Bottom view of the press head

Mounting drill pattern flange/ram

Press type 64



Press type 68

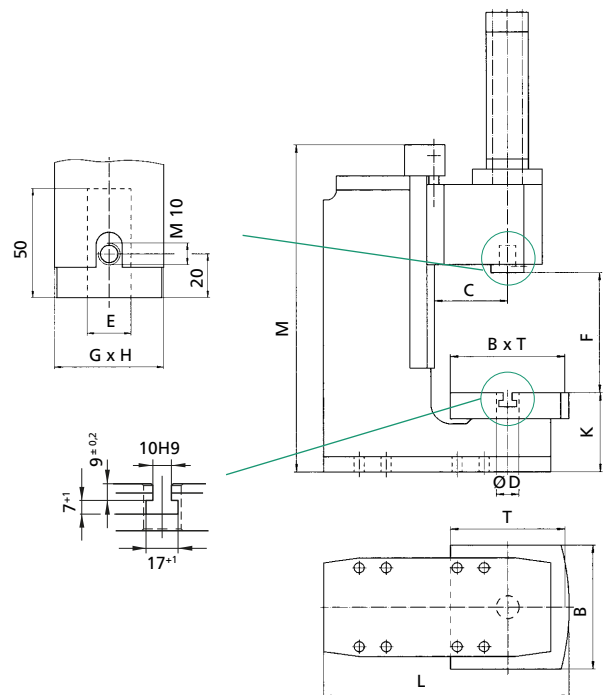

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® HydroPneumaticPress

C-Frame design with force/stroke monitoring

SCHMIDT® HydroPneumaticPresses with force / stroke monitoring are offered as complete system with control unit **SCHMIDT® PressControl 600**. These systems are characterized by sensors and signal amplification integrated in the press head. These signals are evaluated in real time.

Features

- Direct forces are measured due to the force sensor integrated in the ram. Insensitive against side forces
- Signal readings are not affected by outside interference
- A measuring data amplification integrated in the press head provides short transmission paths of unamplified signals
- Precision guide rails for precise working. Bilaterally adjustable, play-free gibs, precision machined bore for tool location. No die-set required



Press type 361




Press type 362




Press type 365


Rapid approach stroke

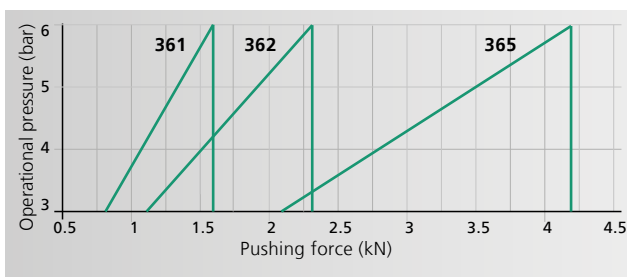

Power stroke

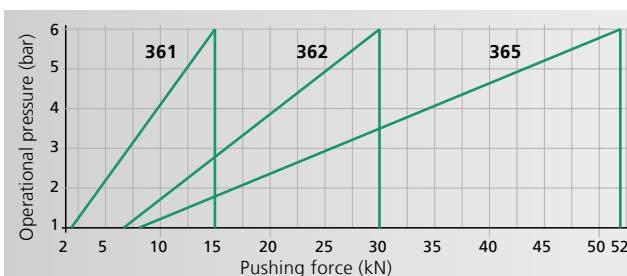

Return stroke

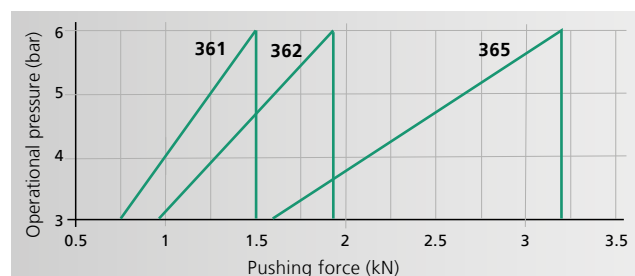

Operational pressure < 3 bar: can only be operated with press force preselector!

From 15 kN to 52 kN in power stroke

Press Type			361	362	365
Total stroke - Power stroke ¹⁾		mm	50-6, 100-12	50-6, 100-12	50-6, 100-12
Nominal force at 6 bar		kN	15	30	52
Process data acquisition stroke force		µm/inc	5	5	5
		N/inc	4.5	9	15
Throat depth	C	mm	131	160	160
Throat depth frame o			151		
Fixture mounting plate suitable for throat depth frame			o		
Ram bore	Ø	mm	20H7	20H7	20H7
External ram dimensions	G x H	mm	70 x 50	90 x 60	90 x 60
Working height ²⁾	F				
Frame No. 301		mm	160-355		
Frame No. 301-500 o		mm	310-500		
Frame No. 329		mm		130-300	130-300
Frame No. 329-460 o		mm		190-460	190-460
Weight (standard)		approx. kg	170	320	330

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 301	361	830	250 x 200	40H7	145	250 x 460
No. 301-500 o	361	990	250 x 200	40H7	145	250 x 480
Special fixture mounting plate with 3 longitudinal slots o			300 x 220 400 x 230	40H7		
No. 329	362, 365	810	300 x 230	40H7	147	300 x 550
No. 329-460 o	362, 365	990	300 x 230	40H7	147	300 x 620
Special fixture mounting plate with 3 longitudinal slots o			400 x 280 500 x 280	40H7		

Options

o Additional charge applies


¹⁾ Special models total stroke/power stroke on request

²⁾ Typical values; can vary ± 3 mm due to casting and production tolerances



Bottom view of the press head

Mounting drill pattern flange/ram

Press Type 361



Press Type 362/365

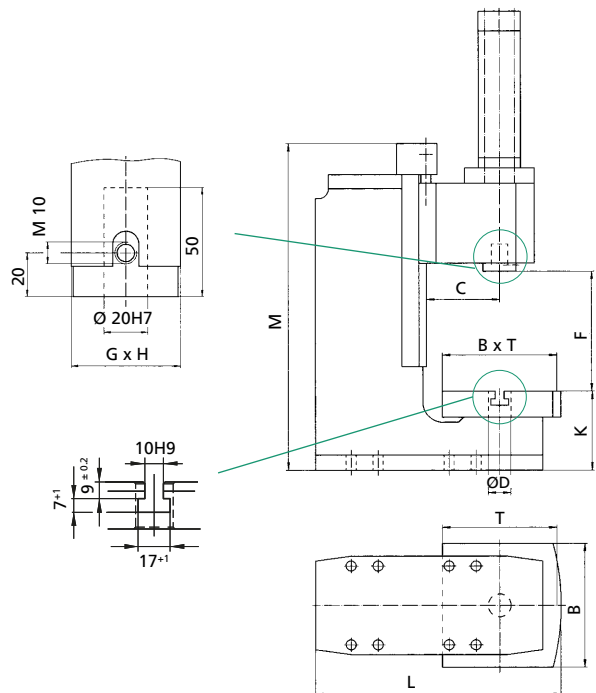

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® HydroPneumaticPress

In C-Frame design with force/stroke Monitoring

SCHMIDT® HydroPneumaticPress with force/stroke monitoring are offered as complete system with control unit **SCHMIDT® PressControl 600**. These systems are characterized by sensors and signal amplification integrated in the press head. These signals are evaluated in real time.

Features

- Direct forces are measured due to the force sensor integrated in the ram. Insensitive against side forces
- Signal readings are not affected by outside interference
- A measuring data amplification integrated in the press head provides short transmission paths of unamplified signals
- Precision bilaterally adjustable, play-free gibs, precision ground bore for tool location. No die-set required




Press type 364




Press type 368


Rapid approach stroke

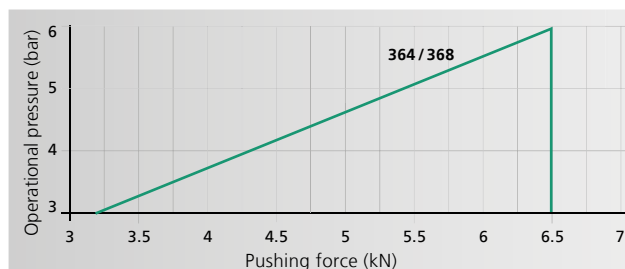

Power stroke

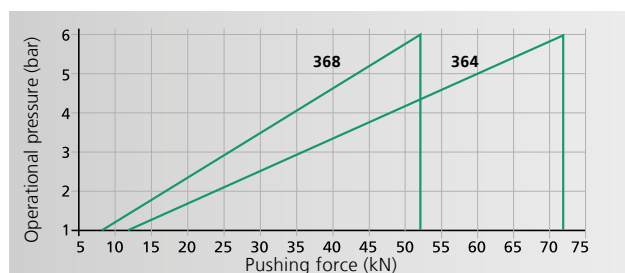

Return stroke

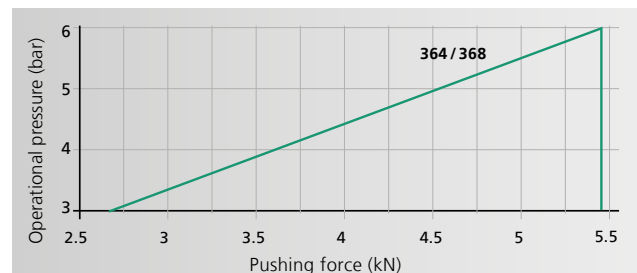

From 72 kN to 100 kN in power stroke

Press Type			364	368
Total stroke - Power stroke ¹⁾		mm	50-6, 100-12	50-6, 100-12
Nominal force at 6 bar		kN	100	72
Process data acquisition				
Stroke		µm/inc	5	5
Force		N/inc	32	20
Throat depth	C	mm	160	160
Ram bore	E	Ø mm	25H7	20H7
External ram dimensions	G x H	Ø mm	90 x 60	90 x 60
Working height ³⁾	F			
Frame No. 64		mm	180-350	
Frame No. 64-600 o		mm	430-600	
Frame No. 68 ²⁾		mm		130-300
Frame No. 68/5 ²⁾ o		mm		190-460
Weight (standard)		approx. kg	420	350

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø mm	Table Height K (mm)	Mounting Surface B x L (mm)
No. 64	364	940	400 x 290	40H7	185	400 x 625
No. 64-600 o	364	1200	400 x 290	40H7	185	400 x 685
No. 68 ²⁾	368	810	300 x 230	40H7	147	300 x 550
No. 68/5 ²⁾ o	368	990	300 x 230	40H7	147	300 x 620
Special fixture mounting plate with 3 longitudinal slots o			400 x 280 500 x 280	40H7		

Options

o Additional charge applies


¹⁾ Special models total stroke/power stroke on request

²⁾ Frame 68/5 required for 30 mm power stroke



³⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Bottom View of the Press Head Mounting drill pattern flange/ram

Press Type 364



Press Type 368

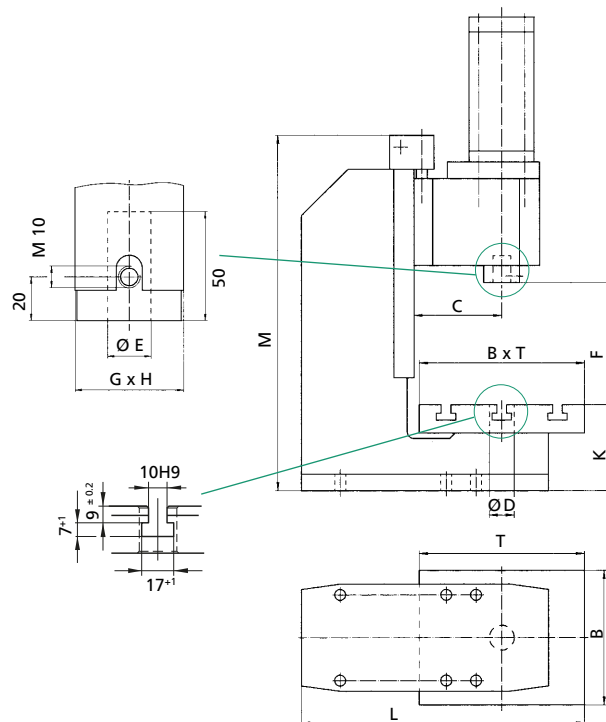

Please consult our Sales Department or Representative.
Detailed dimensional drawings can be downloaded: www.schmidttechnology.de

SCHMIDT® HydroPneumaticPress

H-Frame design with and without force/stroke monitoring

Features


- Stable frame with low bending for the absorption of high forces
- Flexible tool location in the fixture mounting plate due to replaceable centering bushing with precision bore
- The large working area offers sufficient space for large tools
- The force is determined via a pressure transducer with force/stroke monitored presses




Press type 74/76
374/376 (with force/stroke monitoring)




Round ram locked against Rotation with TDC switch (74/76) or position measuring system (374/376) on the rotational guide rod.

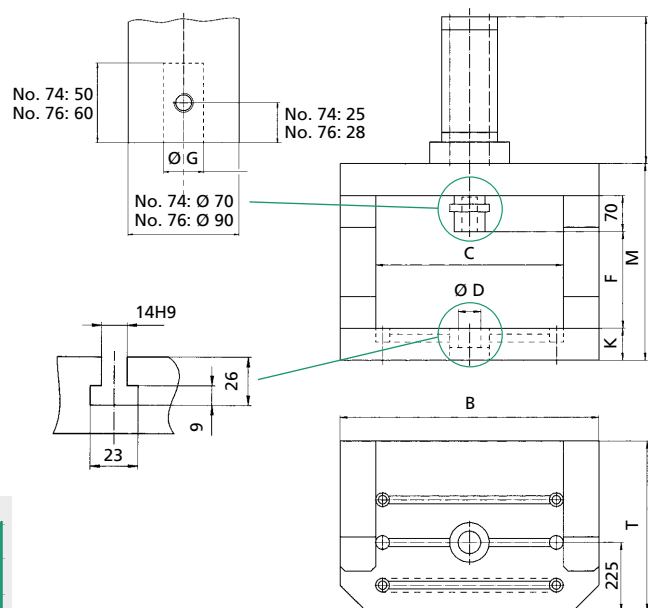


Rapid approach stroke

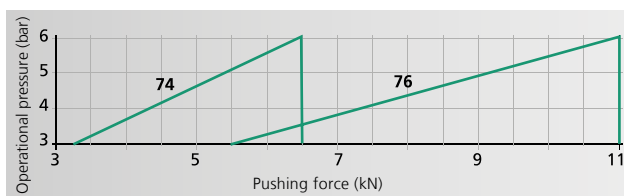

Power stroke

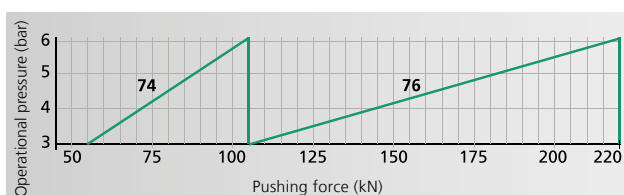

Return stroke

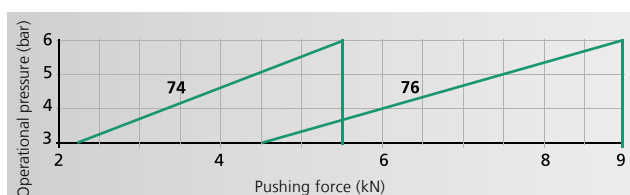

From 100 kN to 220 kN in power stroke

Press Type			74	76
Total stroke - Power stroke ¹⁾		mm	100 - 12	100 - 12
Nominal force at 6 bar		kN	100	220
Ram bore	G	Ø mm	25H7	32H7
External ram dimensions		Ø mm	70	90
Working height ²⁾	F		350	350
Table height	K	mm	95	95
Frame height	M	mm	640	640
Table size	B x T	mm	640 x 480	640 x 480
Table bore	D	Ø mm	40H7	40H7
Clearance	C	mm	420	420
Clearance o		mm	520	520
Weight (standard)		approx. kg	730	760

Press Type			374	376
Total stroke - Power stroke ¹⁾		mm	100 - 12	100 - 12
Nominal force at 6 bar		kN	100	220
Process data acquisition				
Stroke		µm/inc	5	5
Force		N/inc	32	62.5
Ram bore	G	Ø mm	25H7	32H7
External ram dimensions		Ø mm	70	90
Working height ²⁾	F		350	350
Table height	K	mm	95	95
Frame height	M	mm	640	640
Table size	B x T	mm	640 x 480	640 x 480
Table bore	D	Ø mm	40H7	40H7
Clearance	C	mm	420	420
Clearance o		mm	520	520
Weight (standard)		approx. kg	730	760

Options

o Additional charge applies

¹⁾ Special models total stroke/power stroke on request

²⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

Accessories



High-pressure switch

After switching from rapid approach stroke to power stroke, the oil pressure rises in the hydraulic chamber of the cylinder. The high-pressure switch can be adjusted to reach a determined press force through the output generated by the oil pressure in the press.



Adjustment bushing for SCHMIDT® HydroPneumatic-Press No. 74 and 76

For a simplistic adjustment of the working height with a setting range of 100 mm. This greatly reduces the need for spacers to accommodate different working heights during setup changes.



Oil pump

For an air-free refilling of the SCHMIDT® HydroPneumatic-Press with hydraulic oil, including 1 liter Hydraulic oil.

SCHMIDT® Cylinder Units

For flexible use

SCHMIDT® Double-acting cylinder units are useful components for the construction of special machines. They can be mounted independently and are equipped with a magnet kit for detecting

the corresponding end position using a cylinder switch. As flange or side-mount model, with toggle transmission or as hydropneumatic cylinder unit in the force range up to 100 kN.



Press head (side-mount) model



Flange model



Technical Data	SCHMIDT® Cylinder Units	
Typ No.	Press head model	Flange model
20 - 29	•	•
32 - 36	•	
61 - 68	•	• (not for No. 61, 62, 65)
323 - 368	•	•

For the performance data, please refer to the chapters **SCHMIDT® PneumaticPress** and **SCHMIDT® HydroPneumaticPress**, optional with force/stroke monitoring.

Order indications

Key for design options

Cylinder Unit / Stroke / Design	Cylinder unit / stroke / design
Order Example 65 - 50 - 6	Order Example 20 - 50 - FL
Press no.	Press no.
Total stroke	Stroke
Power stroke	Model
= SCHMIDT® Cylinder Unit No. 65	= SCHMIDT® Cylinder Unit no. 20
with total stroke 50 mm and power stroke	with stroke 50 mm as flange model
6 mm as press head model	

SCHMIDT® ElectricPress

A new approach to assembly technology

To use electric drives instead of pneumatic or hydropneumatic driven cylinders, is a modern advancement in assembly technology. **SCHMIDT Technology** combined its proven rugged mechanics with the latest electric drive technology to create assembly presses for industrial production applications. The high efficiency of electric drives may not be the only reason to choose them. The individual process, the infrastructure and the quality of the compressed air should also have a bearing on that decision.

The key advantages of the **SCHMIDT® ElectricPress**:

- Easy programming of parameters reduces set-up time
- Stored press ram motion profiles allow for quick changeover
- Enhanced flexibility
- Reduced tooling costs and wear due to precise positioning
- The stick-slip effect does not occur due to our design. As a result the assembly process will be optimized compared to pneumatic drives, especially at low speeds
- Low noise level reduces operator fatigue and stress

An efficient and reliable assembly process is the key to the success of your products and hence success in competitive markets. The new **SCHMIDT® ElectricPress 345** with **SCHMIDT® Press-Control 600** improves production significantly:

- reduced assembly cost, due to the innovative electrical drive technology
- trustworthiness of its precise monitoring

The **SCHMIDT® ElectricPress 345** comes now with up to **10 kN** force and is based on proven system components. Designed for a durable automation technology the new **SCHMIDT® ElectricPress 345** will safeguard your success.

To meet the highest quality standards expected of a **SCHMIDT® Press**, the **SCHMIDT® ElectricPress 345** press system underwent a rigorous press-stroke test cycle continuously over a period of 4 months at a maximum force of 10 kN. All mechanical, electrical and motor elements have passed that stress test with flying colours.

- Process monitoring in real-time
- Extremely energy efficient
- Integration friendly
- Drive profile repeatability
- All-electric



SCHMIDT® ElectricPress 43/45 with PressControl 75



SCHMIDT® PressControl 75 for quick set-up or rapid change-over and easy programming of press parameters; stores up to 24 datasets.

This combination can be used both in manual workstations as well as in automation solution.

SCHMIDT® ElectricPress manual workstation with **SafetyModule** on PU 20



SCHMIDT® ElectricPress 43 / 45
automation



Features:

- Reproducible values for position, velocity, acceleration and deceleration
- Combination of up to 14 individual ram motion profiles into one complete profile by using a standard PLC
- Press to exact position (closed loop control stroke)
- Press to force (determined by motor current) to
 - press to final force
 - press to position but interrupt if force is exceeded
 - touch force to determine position of workpiece



SCHMIDT® ElectricPress 343/345 with PressControl 600


In conjunction with the **SCHMIDT® PressControl 600**, the **SCHMIDT® ElectricPress** becomes a force/stroke monitored system. The continuous force control provides maximum precision and allows for realization of individual and complex displacement profiles for assembly processes.

SCHMIDT® ElectricPress utilises an integrated load cell. That means:

- Quickly reaching the nominal values
- No overshooting of the target values
- Precise positioning in the 1/100 mm range, even with dynamically changing force outputs
- The system works with predefined optimum acceleration values (no incorrect entries possible)
- Optimization of the processing times is possible due to an additional graphical display force/time [F/t], stroke/time [s/t] for an analysis of the behaviour of the process.



SCHMIDT® ElectricPress 343 and 345 with the **SCHMIDT® PressControl 600** can be used both in manual workstations as well as in automation solutions.

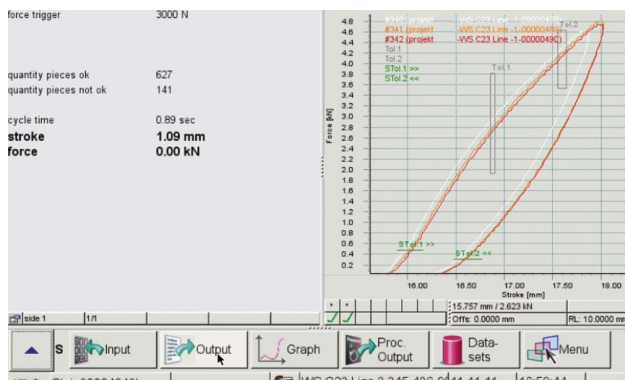

Process visualization

SCHMIDT® ElectricPress 345



Optional:
Integrated remote hand-wheel for set-up of
- stroke control
- force control

Press Type			43	343	45	345
Force F max. ¹⁾		kN	4	4	10	10
Force F at 100 % duty cycle ²⁾		kN	2,5 ³⁾	2,5 ³⁾	6 ³⁾	6 ³⁾
Ram stroke	A	mm	100	100	150	150
Ram speed max.		mm/s	150	150	200	200
Drive resolution		µm	< 1	< 1	< 1	< 1
Resolution PDA - Stroke - Force		µm/inc N/inc		2,42 1,25		2,4 3,0
Throat depth	C	mm	129	129	129	129
Decibel level		dBA	60	60	60	60
Power supply - Motor power - Logic unit			42 V DC / 13 A (22 A max.) 24 V DC / 0,5 A	42 V DC / 13 A (22 A max.) 24 V DC / 0,5 A	230 V DC / 5,9 A (11,8 A max.) 24 V DC / 0,5 A	230 V DC / 5,9 A (11,8 A max.) 24 V DC / 0,5 A
Working height frame 7-420 ⁴⁾	F	mm	62 – 420	62 – 420	50 – 360	50 – 360
Working height frame 7-600 ⁴⁾			100 – 610	100 – 610		
S-H x S-B x S-T		mm	333 x 207 x 362	368 x 242 x 362	530 x 275 x 410	530 x 275 x 410
Weight		kg	35	35	52	52
PRC Gateway, number of I/O's				16 inputs / 16 outputs		16 inputs / 16 outputs
Mounting surface with Frame - No. 7-420 - No. 7-600	⁵⁾	mm	292 x 366 292 x 468	292 x 366 292 x 468	320 x 366	320 x 366

Frame Overview	Press Type	Frame Height M (mm)	Table Size B x T (mm)	Table Bore D Ø (mm)	Table Height K (mm)	Mounting surface B x L (mm)
No. 7-420	43, 343, 45, 345	740	180 x 150	20H7	90	220 x 362
No. 7-600	43, 343	960	180 x 280	20H7	110	220 x 465 – 505

¹⁾ Temporary peak load


²⁾ Nominal power in continuous operation

³⁾ Minimum force for free positioning application is 400 N


⁴⁾ Typical values; can vary ± 3 mm due to casting and production tolerances

⁵⁾ Max. dimensions


Ram press type 43





Ram press type 343



Ram press type 45



Ram press type 345

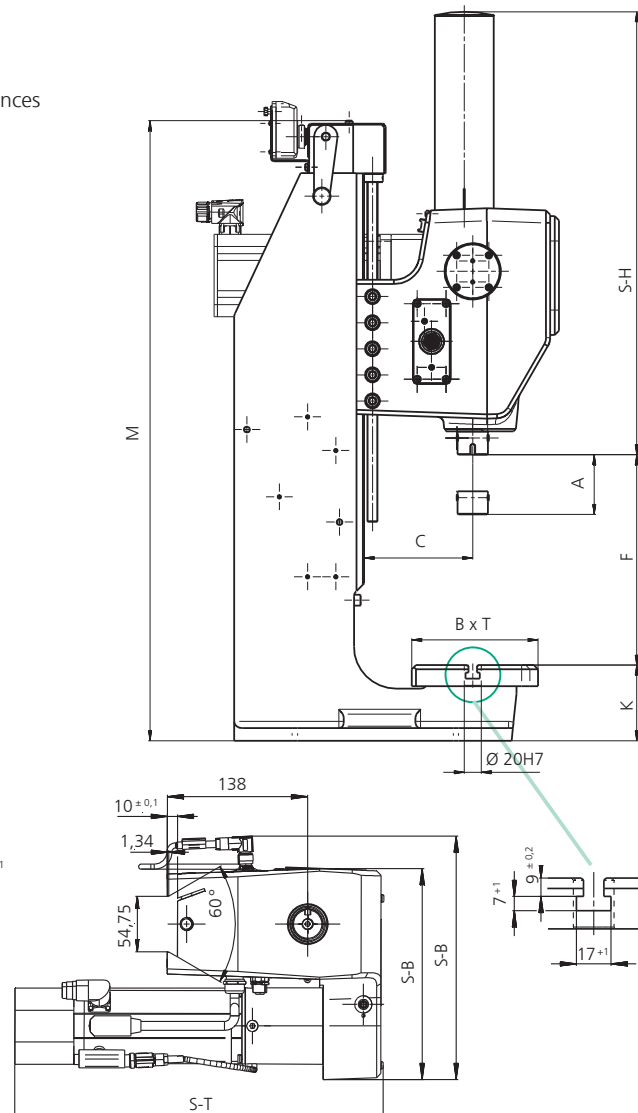

SCHMIDT® ServoPress / TorquePress

The reference for precise assembly

An economic and high quality assembly is the key to the success of your product. The aim is to join together precise assemblies from low-cost individual components with different tolerances. Electrically driven spindle presses and servo presses are ideal for such tasks. **SCHMIDT® ServoPress** systems offer an integrated solution of **SCHMIDT® PressControl 600** or **5000** control unit and **SCHMIDT® ServoPress** modules. They meet the most complex requirements, as stand-alone machines or in automated production lines.

The very high torque of the **SCHMIDT® TorquePress** allows very high forces without additional mechanical transmissions. The considerably higher speed constancy compared to conventional drives entails a higher machine precision.

In comparison to high ratio electric motor driven spindle presses the **SCHMIDT® TorquePress** has an essential lower self moment of inertia and thereby a high dynamic. For this reason the run-up time from zero to working speed is very short. The noise remains remarkably low with all load conditions.



ServoPress



TorquePress 520




SCHMIDT® ServoPress/TorquePress

Superior controlled behaviour

The combination of a spindle with a servo drive is not sufficient to achieve optimum joining results. The key for intelligent assembly is quick and exact controlled behaviour of the press. This requires an integrated system consisting of drive unit, process measure-

ment technology and control unit. These requirements have been taken into account in the system architecture of a **SCHMIDT® ServoPress /TorquePress**.

SCHMIDT® ServoPress module

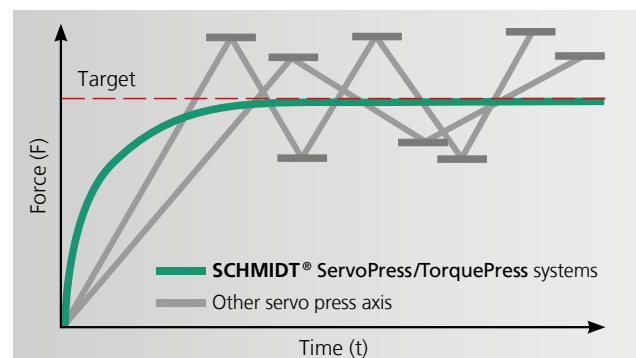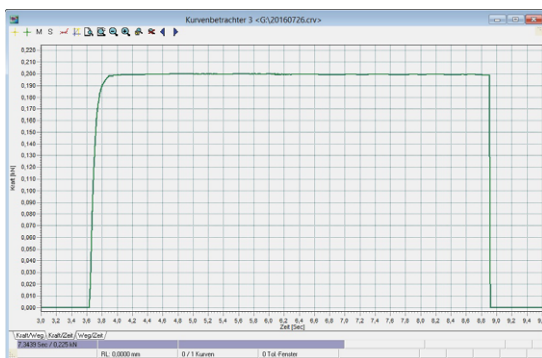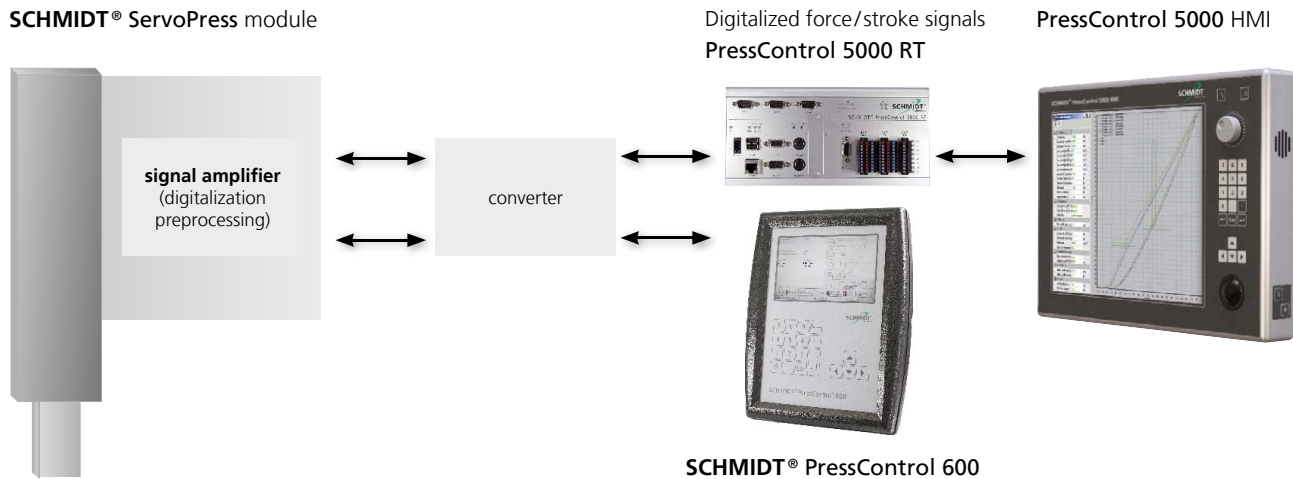

SCHMIDT® ServoPress/TorquePress work with real force controllers, unlike the simple switching controllers used by other manufacturers. That means:

- Quickly reaching the nominal values
- No overshooting of the target values
- Precise positioning in the 1/100 mm range, even with dynamically changing force outputs
- High precision force control
- The control parameters can be adjusted.
 - Optimum adaptation to your application
 - No PLC programming necessary
 - The system works with predefined optimum acceleration values (no incorrect entries possible)
- Optimization of the processing times is possible due to an additional graphical display force/time [F/t], stroke/time [s/t] for an analysis of the behaviour of the process. The classic force/stroke [F/s] display of conventional electronic axis cannot be compared to the reliable recording and visualization possibilities of the **SCHMIDT® ServoPress/TorquePress**

These characteristics are achieved exclusively by combining the following features:

- Integrated measurement technology [scanning rate 2000 Hz]
 - Free-of-play distance measurement, force measurement without lateral forces
- Amplification of the process signals on the **SCHMIDT® ServoPress/TorquePress** module
 - Insensitive against electromagnetic interferences (EMC)
- The system is completed by using **SCHMIDT® PressControl 600** or **5000** (PC-based system), i. e. servo amplifier and motor receive nominal values from the control unit
 - Optimized PLC control algorithm
 - Force [F], stroke [s] or other external control inputs are simultaneously processed
 - The control input can be freely selected
- Quick signal processing on software-based PLC with integrated CNC

SCHMIDT® ServoPress/TorquePress

Uncompromising quality

The solid, unique mechanics of the **SCHMIDT® ServoPress / TorquePress** is essential for precise joining results, even in the toughest industry environments.

Test Bench

Before a new model is released, modules are endurance tested under the most severe operating conditions. The rigorous testing helps identify limitations. Improvements are implemented, which ultimately benefit you.

- Test duration is 3 months
- 20 million loading cycles over the entire working stroke with nominal force and lateral forces components at full travel speed
- Cycle time approx. 2 seconds

Continuous full load capable modules

- Over the entire ram stroke
- With rapid process times
- Via exact roller guiding of the ram with little play
- Square ram benefits
 - Insensitive to lateral forces
 - Locked against rotation

Built-in auto-protection and maintenance

- Fully automated spindle lubrication
- Mechanical clutch as overload protection for motor and load cell
- Cooling and thermal monitoring of mechanical and electronic system
- Current limitation if admissible load is exceeded
- Machine safeguarded against operator error


Service-friendly

- Low maintenance
- Easy module change possible. The control unit recognizes the new module. No modifications of the data sets are necessary. This is achieved due to a high-precision ram position in the reference point with relation to the supporting surface

Built-in safety in light curtain system or protective housing SmartGuard, of course EC type-approved

As a result, this means the following for your application:

- ✓ Excellent efficiency
- ✓ Maximum capacity
- ✓ High production safety

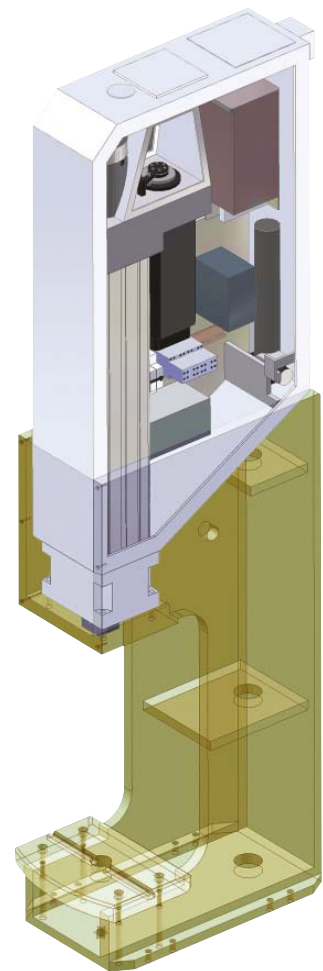


Dynamic bend up compensation

Patented feature


In order to achieve assembly requirements in the 1/100 mm range, compensation of the system yield is required. Work piece, tooling and machine are elastically deformed by the varying forces induced during the pressing process. Once the operation is complete and the press force is removed, this deformation disappears. The result is that the assemblies are not joined to their programmed dimensions. This yielding effect makes it impossible to produce high precision joints regardless of a systems positioning accuracy.

First, a complete process representation of the force characteristic in loaded and unloaded state is necessary so that the system can carry out the required compensation.



Conventional procedures end in the block position – but the process is not finished yet. The system is under force.

Patented Dynamic Bend up compensation by **SCHMIDT Technology**

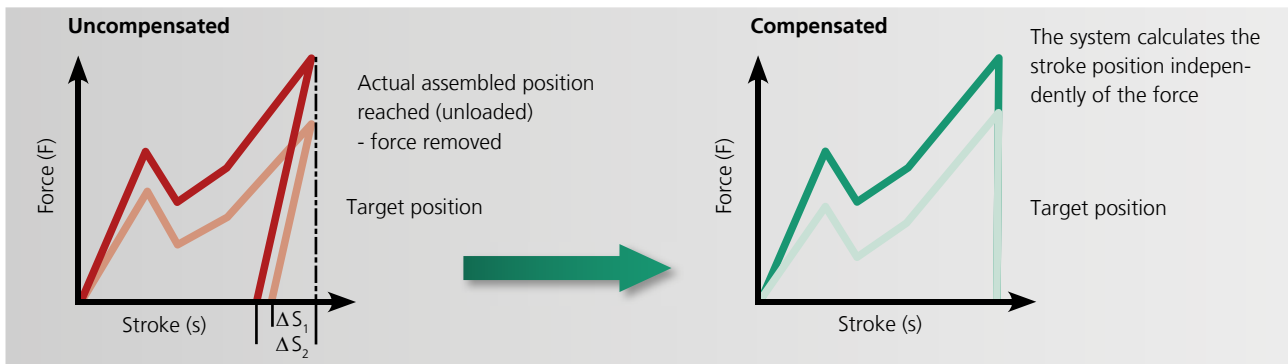


In typical applications, the force required to complete an assembly varies up to 40 % from part to part. When freely positioning, such as without a positive stop, the press ram extends to the same target position, regardless of load. But a closer inspection of the completed assembly and the force/distance curve generated, shows that the final pressed position will vary due to the forces in the operation. (figure 1) In order to overcome this effect,

Example: Press in a Pin in a Bushing

The elasticity of an assembly depends on the equipment, process and the component geometries. This effect becomes significant for assemblies with which the assembly forces of the individual components differ strongly from one another. This can particularly be seen in the example shown.

SCHMIDT® ServoPress/TorquePress systems compensate dynamically to the changing forces. This compensation allows for the assembly to be pressed to the target position, regardless of force (figure 2)

- The **SCHMIDT® ServoPress/TorquePress** system determines easily and precisely the system elasticity and compensates it dynamically in real time
- Only with dynamic bend up compensation, the end position can be reached to an accuracy of the 1/100 mm range
- Free positioning with compensation of the system elasticity is more accurate than pressing on effect tool stop
- Dynamic bend up compensation does not reduce the process speed
- Dynamic bend up compensation in connection with other intelligent functions, such as offset of tolerance data, has been patented

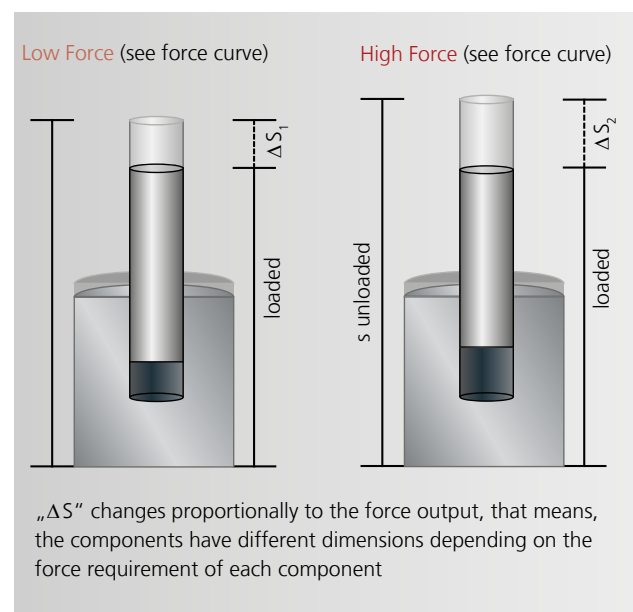

„ΔS“ changes proportionally to the force output, that means, the components have different dimensions depending on the force requirement of each component

SCHMIDT® ServoPress/TorquePress

Operating profiles and applications

SCHMIDT® ServoPress/TorquePress allow a simple setup of the operating profiles. Different standard operating profiles are provided for a quick set-up. According to experience, these standard operating profiles and the combinations of them cover most applications.

TDC = top dead center of the process¹⁾

PS = Pressing start, start of the process data recording¹⁾



PP = Probing position (depending on the component geometry)

IP = Intermediate position¹⁾ (is required for monitoring purposes)


EP = End position¹⁾ ¹⁾ adjustable

Target is "Stroke"

Normal operating profile, is typically combined with bend up compensation.


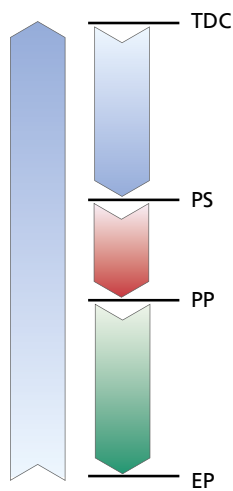


Pressing until reaching a specified position leads to precise results in connection with bend up compensation.




Target is "Force"

For processes in which the force reached is a measure for the process quality e. g. material compression.


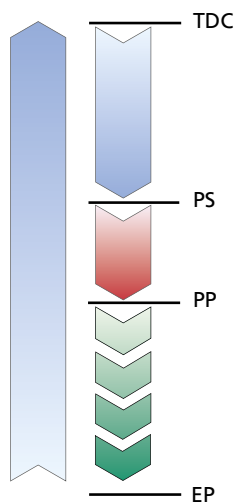


Plugging blind bores – a sphere is pressed in and crimped. Force output correlates to material displacement to determine density and retain force independent of stroke.




Target is "Delta Stroke" with probing Force

For processes in which component tolerances must be detected. The press detects the surface and presses from this point to a programmed distance.


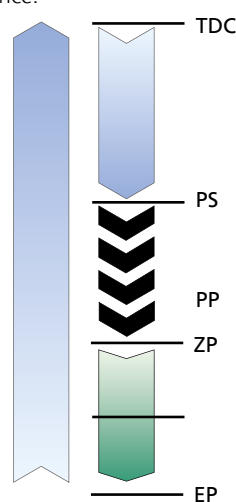


Pressing to a predetermined force which identifies a target feature with which the final pressing distance is measured and pressed.




Target is "Force Increase"

The return stroke is triggered by detecting a customer defined force slope.

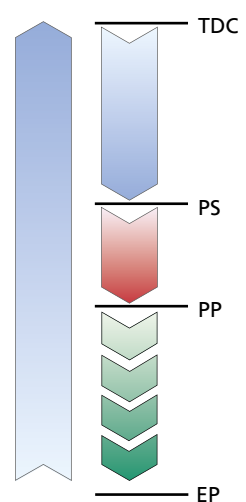

Pressing of "Beta" plugs or „König“ expanders. Sealing and retaining function depend on a force increase that is the return stroke criterion for the press.




SCHMIDT® ServoPress

Modules with large application range



Press type 450/460

ServoPress 415 to 460

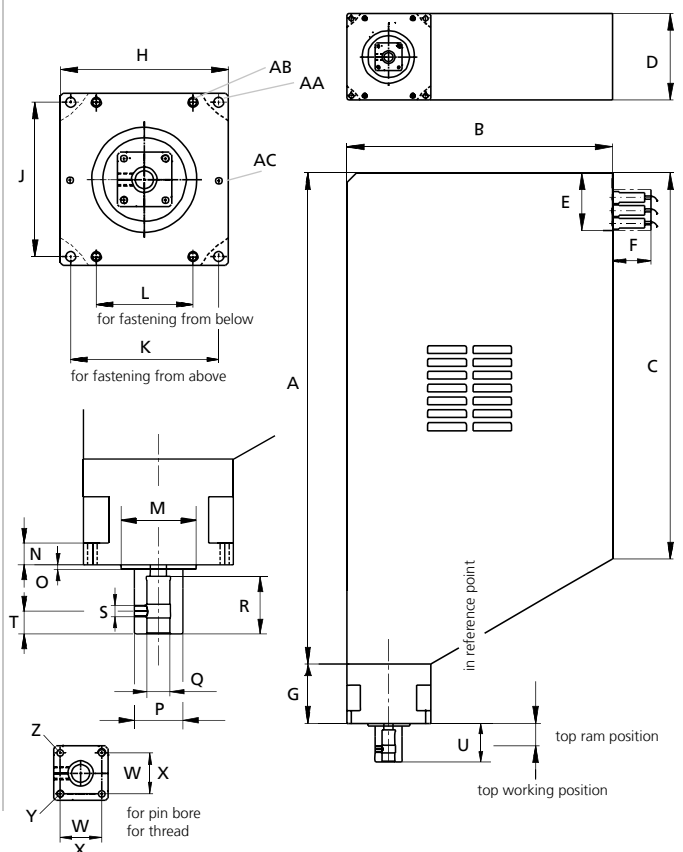


Modules

With force outputs of 15 N to 150 kN

ServoPress Type			405	415	416	417	420	450	460
Force F	F	kN	0.8	4.5	5	14	35	75	150
Force F at 100% duty cycle	F	kN	0.5	1.5	3	7.5	20	50	100 ¹⁾
Ram stroke		mm	150	200	200	300	400	500	500
Resolution (drive control)		µm	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Resolution data acquisition									
Stroke		µm/inc	2.4	4	4	5	6	8	8
Force		N/inc	0.25	1	1	3.75	10	24	48
Ram speed		mm/s	0 - 300	0 - 200	0 - 200	0 - 200	0 - 200	0 - 200	0 - 100
Overload protection			-	Mech. clutch	Mech. clutch	Mech. clutch	Mech. clutch	Mech. clutch	Mech. clutch
Service life of the cycles acc. to standard operating profile			2 x 10 ⁷	2 x 10 ⁷	2 x 10 ⁷	2 x 10 ⁷	2 x 10 ⁷	2 x 10 ⁷	1 x 10 ⁷
Drive			ball screw	ball screw	ball screw	ball screw	roller screw	roller screw	roller screw
Power supply			230 V 1~/6.3 A (208 V 3~/6.3 A)	230 V 1~/6.3 A (208 V 3~/6.3 A)	230 V 1~/6.3 A (208 V 3~/6.3 A)	230 V 1~/16 A	400 V 3~/16 A	400 V 3~/35 A	400 V 3~/35 A
Weight (standard)		approx. kg	20	27	27	70	120	240	240
	A	mm	590	560	560	762	978	1166	1166
	B	mm	309	330	330	412	535	677	677
	C	mm	440	434	434	600	763	992	992
	D	mm	109	109	109	134	180	236	236
Cable connection	E	mm	~ 75	~ 75	~ 75	~ 90	~ 100	~ 90	~ 90
	F	mm	~ 60	~ 60	~ 60	~ 60	~ 60	~ 60	~ 60
Flange	G	mm	47	77	77	92	122	120	120
	H	mm	75	75	75	130	140	150	150
	J	mm ± 0.1	60	88	88	120	160	210	210
	K	mm ± 0.1	60	63	63	115	120	130	130
	L	mm ± 0.1	40	59.4 x 59.4	59.4 x 59.4	75			
	M	Ø mm	45h6	45h6	45h6	65h6	90h6	100h6	100h6
	N	mm	11	11	11	19	32	33	33
	O	mm	4	4	4	4	5	5	5
	AA	Ø mm	5,3	6,3	6,3	8,4	10.1 / M12	12.0 / M14	12.0 / M14
	AB	Ø mm	M5	M6	M6	M8			
	AC	Ø mm						12.0 / M14	12.0 / M14
Ram									
External ram dimensions	P	mm	Ø 14	32 x 32	32 x 32	42 x 42	55 x 55	65 x 65	65 x 65
Ram bore (with bushing)	Q	Ø mm	6H7	10H7	10H7	20H7	20H7	20H7	20H7
	R	mm	18	30	30	50	40	50	50
	S		M5	M8	M8	M10	M10	M10	M10
	T	mm	8	10	10	20	20	20	20
Top working position	U	mm	40	50	50	60	60	60	60
Top ram position	V	mm	30	39	39	33	45	45	45
for pin bore	W	mm ± 0.02		22	22	32	40	40	40
for thread	X	mm		22	22	32	40	40	40
	Y			M5	M5	M6	M8	M8	M8
	Z	Ø mm		5H7	5H7	5H7	8H7	8H7	8H7

¹⁾ 100 kN S3 66 % 30 s; 90 kN 100 % ED

Press Type			SP 405	SP 415/416	SP 417	SP 420	SP 450	SP 460
Frame								
Throat depth	C	mm	130	130	150	160	160	160
Table bore	D	Ø mm	20H7	20H7	40H7	40H7	40H7	40H7
Working height	F	mm	246	300	387	518	612	602
Table height	K	mm	93	113	128	155	190	220
Table size	B x T	mm	160 x 140	220 x 175	250 x 200	300 x 220	370 x 230	370 x 230
Mounting surface	B x SL 6	mm	160 x 345	220 x 405	250 x 460	300 x 563	370 x 635	370 x 760
	O	Ø mm	9	11	11	13	13	13
	SL 1	mm	50	80	80	85	95	95
	SL 2	mm	220	250	250	300	350	350
	SL 3	mm				50	50	50
	SL 4	mm				350	400	400
	SL 5	mm	325	390	430	528	600	725
	SL 6	mm	345	405	460	563	635	760
	SH 1	mm	510	630	780	1080	1150	1192
	SH 2	mm	1016	1100	1430	1835	2150	2170
	SB 1	mm	140	200	220	280	350	370
	SB 2	mm	160	220	250	300	370	390

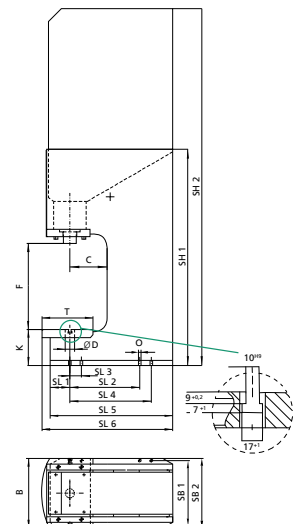

SCHMIDT® TorquePress

Precise dynamic



TorquePress 200



TorquePress 520

- high dynamic
- compact design
- maximum force at low rotational speed

The ideal automation component

Driven by an entirely new torque motor development, the **SCHMIDT® TorquePress 520** is the perfect press component for quick and high-precision applications. The new drive technology offers high press force capacity and at the same time low mass moments of inertia that considerably increase the precision of press force and positioning. In automation solutions the quality and the efficiency can thus be considerably improved.

High dynamic, low moment of inertia

In comparison to high ratio servomotors and gear motors the torque motors have a much lower moment of inertia and thus a high dynamic. The start-up time from zero to working speed is only about 100 ms.

Constantly high torque

Due to the high-pole design of the torque motor the maximum torque is already reached at a low speed.

Constant high speed

The speed constancy is improved by a factor of about 10 compared to conventional drives which results in higher machine precision.

Fully integrated process data acquisition

The force and displacement measurement via an absolute measuring system takes place directly on the ram with a resolution of 0.1 μm . By consequently avoiding gears and other mechanical transmission components a nearly backlash-free construction is possible which in combination with the low inertia, satisfies the highest precision requirements.

Modular interface

The exchange of data via higher level control becomes more flexible and easier to realize. The user is free to choose: either to select predefined displacement profiles, or to control fully and flexibly the displacement positions, speed and dwell time by higher level control.

Modules

With force outputs of 20 kN to 230 kN


Technical Data	TorquePress 520	TorquePress 200
Force F max. ¹⁾	20 kN	230 kN
Force F at 100 % ED ²⁾	10 kN	200 kN
Ram stroke	250 mm	500 mm
Resolution (drive control)	< 0.1 µm	< 0.1 µm
Process data acquisition		
- Force	4 µm/inc.	8 µm/inc.
- Stroke	6.25 N/inc.	100 N/inc.
Ram speed (max.)	260 mm/s	200 mm/s
Overload protection	electrical	mechanical
Service life of the cycles acc. to standard operating profile	2 x 10 ⁷	1 x 10 ⁷
Drive	ball screw	planetary roller screw drive
Power supply	3 x 400 V / 16 A	400 V 3~ / 32 A, 400 V Steckdose CEE
Weight / height resp. length		
- Module (approx.)	95 kg / 1100 mm	770 kg / 2300 mm (upright resp. horizontal)
- H-frame (approx.)		980 kg / 850 mm (upright resp. horizontal)
- Press base	120 kg / 670 mm	approx. 125 kg / height flexible
Control unit	SCHMIDT® PressControl 5000 / 600	SCHMIDT® PressControl 5000 / 600

¹⁾ Temporary peak load

²⁾ Nominal power in continuous operation

Press Type	TP 520	TP 200
Frame		
Throat depth	C mm	160 — ³⁾
Table bore	D Ø mm	40H7 40H7
Working height	F mm	340 560
Table height	K mm	132 115
Table size	B x T mm	300 x 230 — ³⁾
Mounting surface	B x SL6 mm	300 x 530 810 x 610
	O Ø mm	12,5 17,5
	SL 1 mm	82 155
	SL 2 mm	300 — ³⁾
	SL 3 mm	492 — ³⁾
	SL 4 mm	520 300
	SL 5 mm	
	SL 6 mm	
	SH 1 mm	670 850
	SH 2 mm	1640 2990
	SB 1 mm	280 600
	SB 2 mm	300 810

³⁾ H-frame version

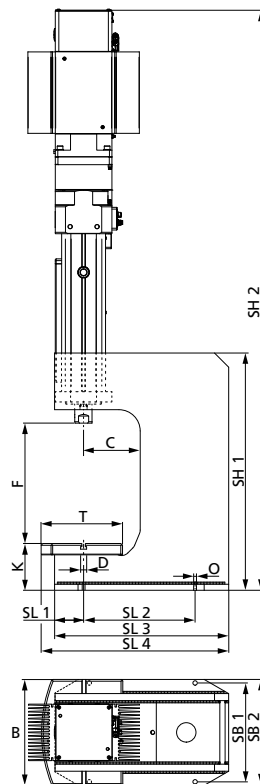

Detailed dimensional drawings can be downloaded:
www.schmidttechnology.de

SCHMIDT® PressControl

Machine control units

SCHMIDT® PressControl 75, 600 and 5000 are control units of the latest generation, which allow the design of modern production processes – from the single workstation to complete automation. You benefit from our competence in:

- Safety technology – type-approved devices
- Process measurement technology – simultaneous measuring during the process
- Process documentation

SCHMIDT® PressControl control units have the following features:

- Efficiency due to intuitive user interfaces
- Quick and secure process set-up e. g. thanks to the touch-screen and additional handwheel ram control function with **SCHMIDT® PressControl 600** and **5000** in combination with the **ServoPress/TorquePress**
- The integrated PLC allows programming of additional inputs/ outputs or sensors/actuators and the application-specific design of the workstation or the line
- The integrated measurement data processing is insensitive against interferences (EMC). This results in a high measurement security of the entire system
- With integrated safety technology, the entire system becomes a type-approved single workstation
- Service functions such as "Firmware Update" ensure the liability in the future
- Guaranteed complete process documentation with full traceability

SCHMIDT® PressControl 75




SCHMIDT® PressControl 5000 RT



SCHMIDT® PressControl 600



SCHMIDT® PressControl 5000 HMI

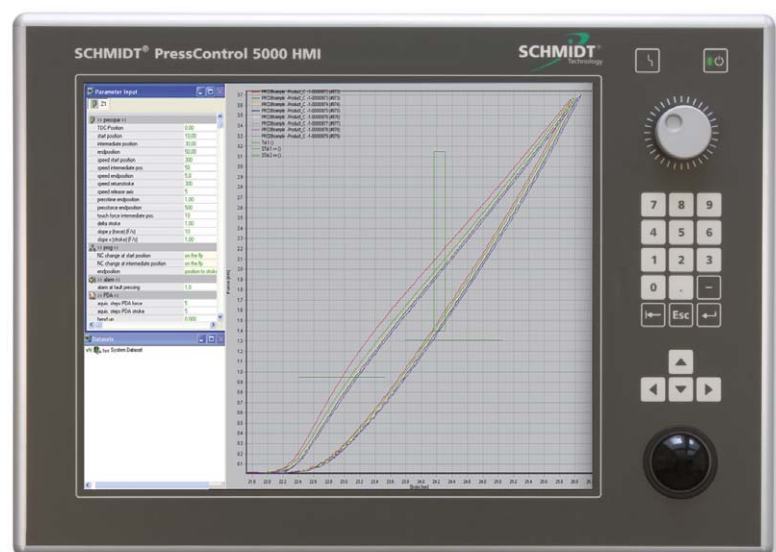

SCHMIDT® PressControl 75

Compact functionality

Highly compact yet multifunctional **SCHMIDT® PressControl 75** available for these press systems:

- **SCHMIDT® ElectricPress**
- **SCHMIDT® PneumaticPress**
- **SCHMIDT® HydroPneumaticPress**

Its easy and intuitive touchscreen allows for quick and efficient process set-up or change-over. Process specific data can be stored in up to 24 datasets.

The **SCHMIDT® SafetyModule** allows the design of manual workstations with safety technology that meets the latest global standards for two-hand cycle initiation, guarding or light-curtain protection.



Technical Data

Supply voltage	24 V DC
Current	< 3 A
Operating temperature	0 – 40 °C
Protection class	IP 54
Interfaces	<ul style="list-style-type: none"> ■ RK512 protocol ■ CANopen for PRC - Gateway or CANopen Compact Box IP 2401
Electrical connections	All connections are pluggable
Display	<ul style="list-style-type: none"> ■ 2.8" TouchScreen ■ Process information
Operation	<ul style="list-style-type: none"> ■ 4 function keys ■ 3 languages
Modes of operation	<ul style="list-style-type: none"> ■ Two-hand release with SafetyModule ■ Light curtain with SafetyModule ■ Start button for operation without SafetyModule ■ Workpiece control ■ Activation of sliding table ■ Return stroke initiation with external signal ■ Blow-out/blow-off
Operating functions	<ul style="list-style-type: none"> ■ Piece- or preselection counter ■ Set-up mode ■ BDC dwell time ■ User Management
Dimensions	90x120x60 (h x w x d)
Mounting	Fastening screws, optional magnet holder

Data input

>>press parameter<<
presstime endposition 0,5 s
>>counter<<
preselect counter off
preselect quantity 10 pcs

Data output

DATASET1 (1)		
Quantity OK	4	pcs
Quantity NOK	1	pcs
Presstime	0,5	s
Two-hand release		

Data output

DATASET1 (1)		
Quantity OK	4	pcs
Quantity NOK	1	pcs
Two-hand release		

SCHMIDT® PressControl 600

with integrated PLC and Process Data Management

The **SCHMIDT® PressControl 600** with integrated PLC and process data management is made for intelligent process control of force/stroke monitored **SCHMIDT® ManualPress**, **SCHMIDT® (Hydro)PneumaticPress**, **SCHMIDT® ElectricPress** or **SCHMIDT® ServoPress/TorquePress**. Additional automation tasks around the press process can also be realized by the **SCHMIDT® PressControl 600**.

Control Unit

All process integrated system elements and data are controlled and managed centrally by the **SCHMIDT® PressControl 600**. The standard system configuration already includes a basic programming, special applications can be programmed as well.


Integrated Operator Panel

The integrated operator panel of **SCHMIDT® PressControl 600** with complete operating interface is made for parametrizing and operating the control as well as for visualization, administration, and documentation of process data (dataset management).

Features

- User-friendly, intuitive menu navigation by touchscreen
- Individual design of user interface
- Keypad with integrated membrane for the input of numerical values and choice of functions
- Softkeys have different functions on different levels and simplify the handling
- Quality evaluation on the basis of force/stroke tolerances, and thus a reliable detection of NOK parts with process monitored presses
- Handwheel software for setup mode for **SCHMIDT® ElectricPress** (force/stroke monitored) or **SCHMIDT® ServoPress/TorquePress**, external handwheel as a handheld as an option (connection via **SCHMIDT® PRC Gateway**)
- Industrial strength, even in harsh environments
- Protection class IP 54

SCHMIDT® DataBase software maps the process data of all individual assembly steps into a data bank, including historic data. And with the **SCHMIDT® PRC OPC** software available on these models, data exchange will now become the automation standard.

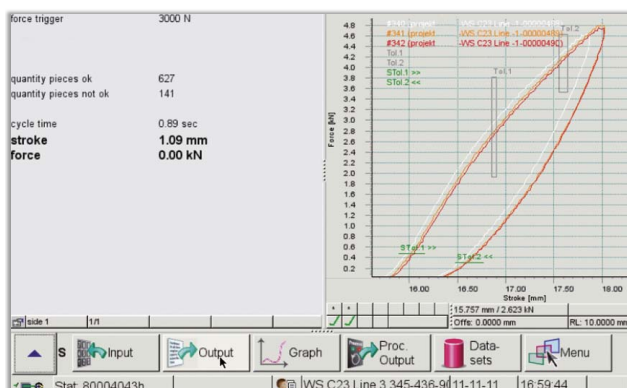

Technical Data

Industry PC with	<ul style="list-style-type: none"> ■ Integrated PLC ■ Integrated CNC (with SCHMIDT® ServoPress/TorquePress) ■ Intelligent process control ■ Diagnosis and service functions ■ Linux operating system
Drive	Solid State Drive
Field bus	<ul style="list-style-type: none"> ■ CANopen with possibility to connect: <ul style="list-style-type: none"> - 1 force/stroke monitored SCHMIDT® ManualPress 3xx, 1 SCHMIDT® (Hydro)PneumaticPress, 1 SCHMIDT® ElectricPress or 1 SCHMIDT® ServoPress/TorquePress - SCHMIDT® PRC Gateway - CANopen Compact box ■ EtherNet TCP/IP ■ PROFIBUS (optionally via external CANopen/PROFIBUS-Gateway) 16 Byte input/output data ■ PROFINET (optionally via external CANopen/PROFINET-Gateway) 16 Byte input/output data ■ EtherCAT (optionally via external CANopen/EtherCAT-Gateway) 16 Byte input/output data
Interfaces	<ul style="list-style-type: none"> ■ EtherNet (10 / 100 MBit) ■ 2 x USB
Panel with	<ul style="list-style-type: none"> ■ Intuitive user interface ■ Diagnosis and service functions
Screen	<ul style="list-style-type: none"> ■ Integrated 7" widescreen TFT display (800 x 480) with touchscreen
Power supply	<ul style="list-style-type: none"> ■ 24 V DC with integrated UPS
Assembly	<ul style="list-style-type: none"> ■ Mech. adaption VESA 75 for optional table or wall fixture as well as fixture for housing

SCHMIDT® PressControl 5000

Compact system control for intelligent process control


Control 5000 RT

All system elements and data involved in the process are centrally controlled and administrated by the control unit **SCHMIDT® PressControl 5000 RT**. The integrated PROFIBUS interface permits integration of the press system as an intelligent Profibus slave into existing PROFIBUS networks. Parametrization, operation and programming will be effected by using software components which are installed on the operating panel **SCHMIDT® PressControl 5000 HMI** or on a user PC. The standard system configuration already includes a basic programming for different operating profiles; special applications can be additionally programmed.



Operating panel 5000 HMI

SCHMIDT® PressControl 5000 HMI can be parametrized and operated via operator panel **SCHMIDT® PressControl 5000 RT** with its complete operating interface. Furthermore visualization, administration and documentation of process data (dataset management) can be effected as well by this instrument.

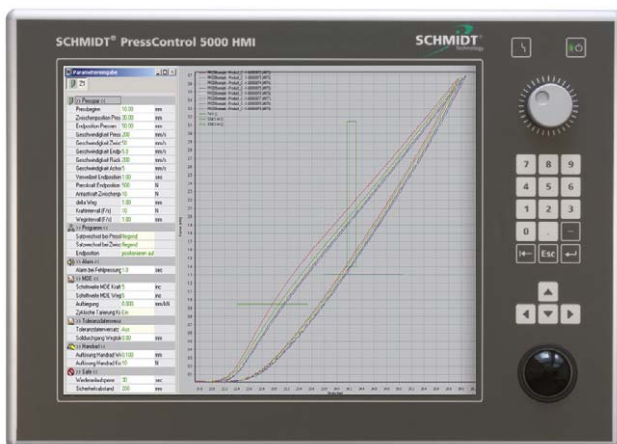

Technical Data 5000 RT

Industry PC with	<ul style="list-style-type: none"> ■ Integrated PLC ■ Integrated CNC with all-digital drive control (integrated force-, position- and speed control loop) for up to 6 axis ■ Intelligent process control ■ Diagnosis and service functions ■ Linux operating system ■ Assembly on DIN rail (TS 35) according to EN 50022 (35 mm x 7.5 mm)
Drive	■ Integrated hard disk 30 GB
Field bus	<ul style="list-style-type: none"> ■ CANopen with possibility to connect: <ul style="list-style-type: none"> - up to 6 (application-dependent) controlled NC axis e.g. SCHMIDT® Servo-Press-/Torque-Press as well as press force monitored SCHMIDT® ManualPress, SCHMIDT® (Hydro)-PneumaticPress and SCHMIDT® ElectricPress - SCHMIDT® PRC Gateway - more than 2000 I/O's ■ EtherNet TCP/IP ■ PROFIBUS: <ul style="list-style-type: none"> - PPROFIBUS Slave interface - 48 Byte input/output data ■ PROFINET (optionally via external CANopen/PROFINET-Gateway) 16 Byte input/output data ■ EtherCAT (optionally via external CANopen/EtherCAT-Gateway) 16 Byte input/output data
Interfaces	<ul style="list-style-type: none"> ■ EtherNet (10/100 Bit) ■ 6 x USB ■ 2 x RS 232 (COM 1/COM 2) for diagnosis purposes ■ 4 digital inputs (24 V) galvanically isolated ■ 4 digital outputs (24 V) galvanically isolated
EMC	Acc. to requirements of EMC law
Power supply	24 V DC with integrated UPS
Ambient temperature	0 – 40 °C

Technical Data 5000 HMI

Operating panel with	<ul style="list-style-type: none"> ■ Intuitive user interface ■ Diagnosis and service functions ■ Microsoft Windows 7 operating system
Screen	<ul style="list-style-type: none"> ■ Integrated 19" TFT display (SXGA resolution) with touchscreen
Drive	■ Integrated hard disk 80 GB
Interfaces	<ul style="list-style-type: none"> ■ 1 x PS/2 keyboard ■ 1 x VGA ■ 3 x USB ■ 1 x RS232 ■ 2 x Ethernet (10/100 MBit)
EMC	■ Acc. to requirements of EMC law
Power supply	■ 24 V DC
Current consumption	■ 4 A
Ambient temperature	■ 0 – 40 °C
Protection class	■ IP 54
Weight	■ Approx. 15 kg

User interface for professional assembly

For PressControl 600 and 5000

The user interface for professional assembly is installed in the **SCHMIDT® PressControl 600 and 5000**. The functionality has been developed especially for assembly operations with direct intervention in the process.


The following functions are available

- Process visualization
- Process data management
- Development tool (PLC editor)
- **SCHMIDT® PRC DataBase** as an option

Features

- Easy and quick setup of the processes
- Definition of the data sets and operating profiles by parameters
- Process optimization due to switchover of the process display (F/s, F/t, s/t)
- Easy and quick definition and evaluation of the processes using the quality monitor
- 12 free definable process observers (F/s-windows or stroke tolerances)
- Guaranteed detection of “failed” parts
- Unambiguous documentation and component assignment
- Software PLC for freely programming processes
- Service functions for diagnosis and system updates


User Interface **SCHMIDT® PRC 600**

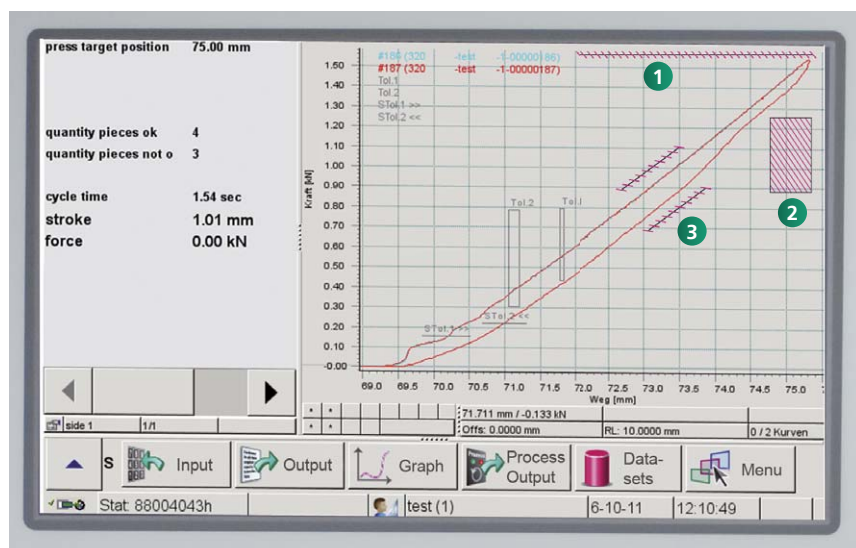

1 + **2** Each tolerance can be inverted, creating a do-not pass-through area or line.

3 Stroke tolerance can be positioned at any angle from horizontal to vertical.

User Interface **SCHMIDT® PRC 5000**

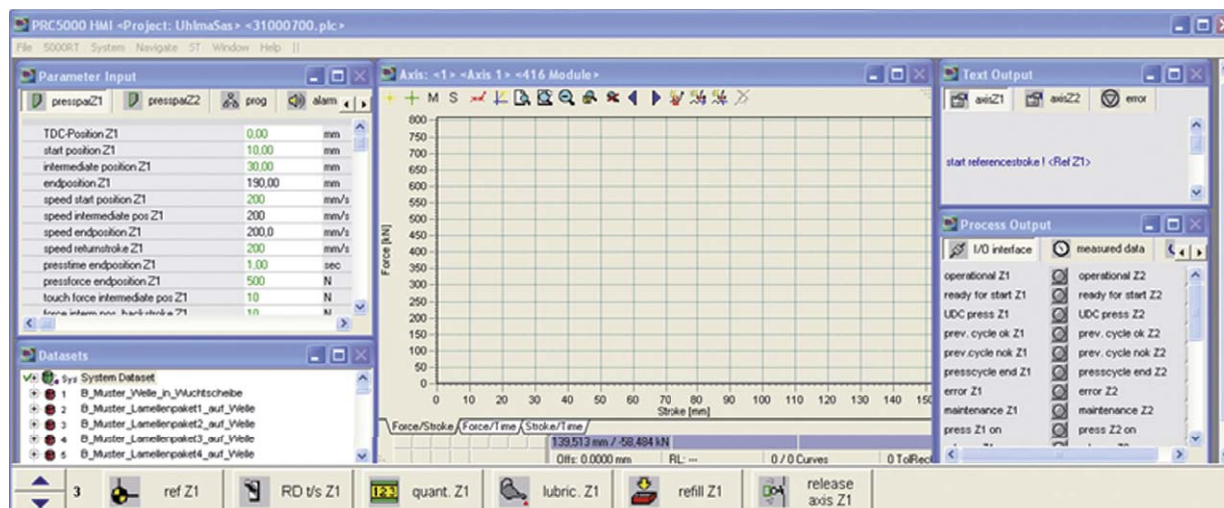

Visualization and process analysis

For PressControl 600 and 5000


Visualized Display

Force output and press stroke are important parameters for evaluating the quality of pressed assemblies. The data of these measurements are recorded during the process and displayed by the software as force/stroke behaviour curve F/s, F/t or s/t.

Freely definable tolerances in the form of force/stroke windows and stroke tolerances are provided for quality assurance of the assembly process. With the help of these criteria, quality critical areas can be monitored selectively. If the tolerances in the moni-

tored curve areas are not met, application-specific interventions can be carried out (e. g. selection measures).


It is easy to create tolerance criteria and to display curve behaviour exactly. For an evaluation of the behaviour, the working stroke and the return stroke are important. The high resolution of our measurement systems allows a large number of measuring points that are required for a process-safe evaluation. Zoom and measuring functions allowing detailed documentation about the assembly processes.

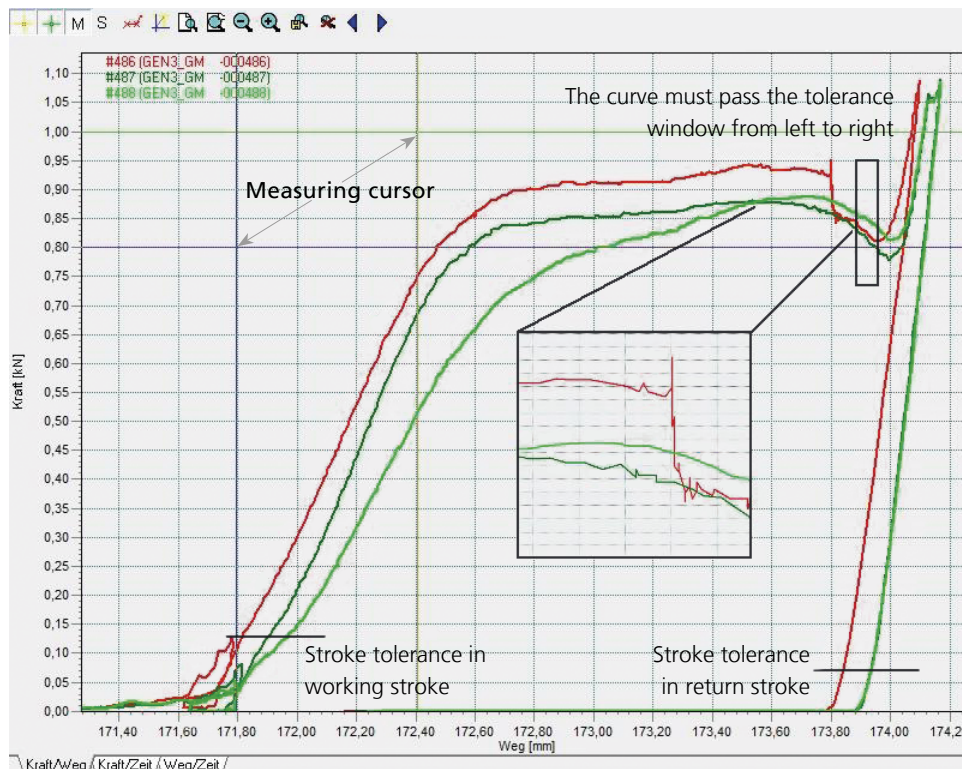

Process analysis – graphic display force over stroke

SCHMIDT® MoveTol

Patented offset of tolerance, data software for PressControl 600 and 5000

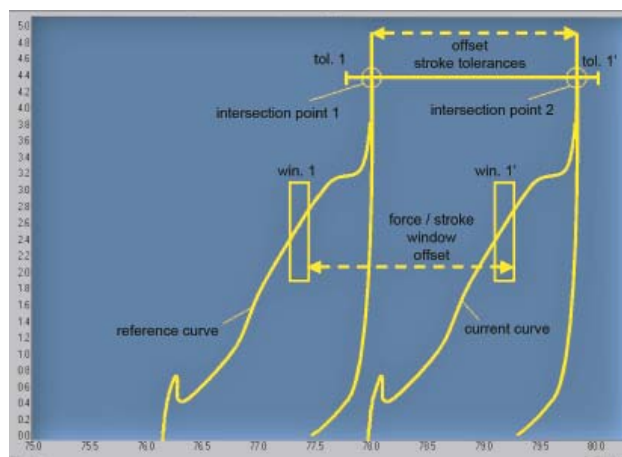

Assembled parts are subject to certain manufacturing tolerances. Dimensional deviations of the parts result in an offset of the curves in the curve window. The curves of the parts with higher tolerance deviations may then be situated outside of the defined tolerance limits and are classified as “failed” part.

Using the function “Offset of tolerance data”, the altitude tolerances of parts can be taken into account. The defined tolerance windows and stroke tolerances are offset by the distance of a reference position. After that, the pass/fail evaluation is carried out.


Offset of tolerance data in relation to freely selectable reference

SCHMIDT® PRC Interface

Interface for data evaluation and control

The modular **SCHMIDT® PRC Interface** of **SCHMIDT Technology** meets multiple requirements in the field of data management. It offers possibilities in the areas of system control, data storage, and exchange as well as visualization and analysis. Various requirements with respect to quality assurance, traceability, and optimization of production processes can be realized. A large number of current interfaces are available on fieldbus level and allow easy integration of the press system into master control



systems. The data obtained during the press process allow conclusions on quality fluctuations in components or also in preliminary production processes. Not only do data acquisition and storage play a key role but also analysis and evaluation. **SCHMIDT® PRC DataBase** as well as **SCHMIDT® PRC FileXChange** offers a whole range of possibilities. Evaluation can be carried out either with standard tools or via the IT systems of the user to which the process results are transmitted.

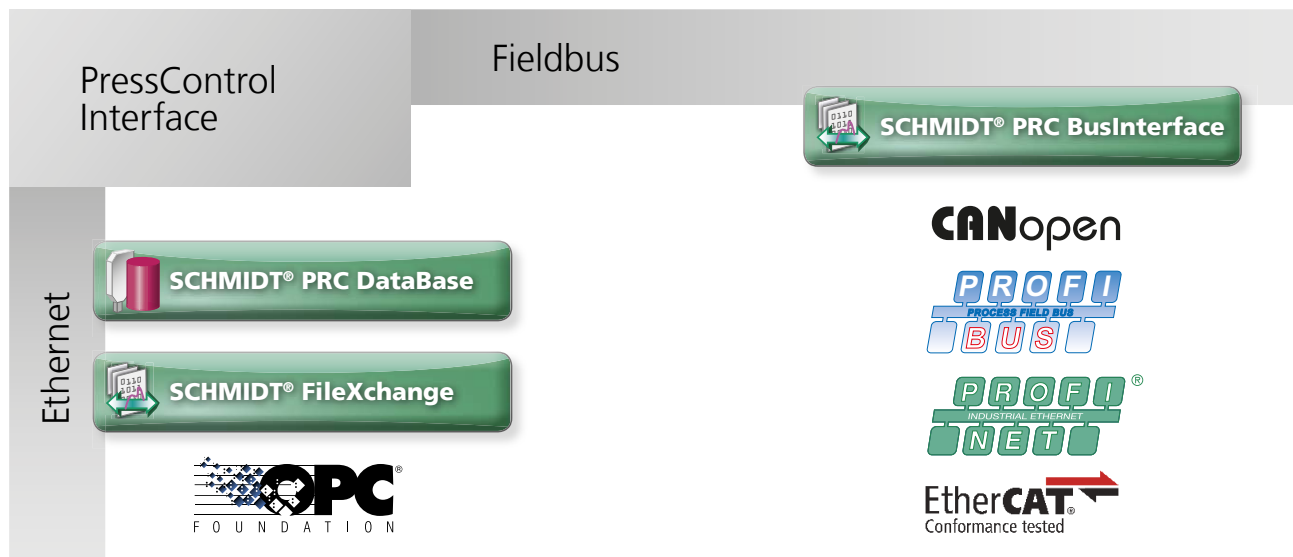

SCHMIDT® PRC DataBase

Database software for PressControl 600 and 5000

SCHMIDT® PRC DataBase is an optional software for the modular control system **SCHMIDT® PressControl 5000** or **SCHMIDT® PressControl 600**. The database software is used for storing and analysing the data of the control system – process specifications and process results – particularly under quality assurance aspects.

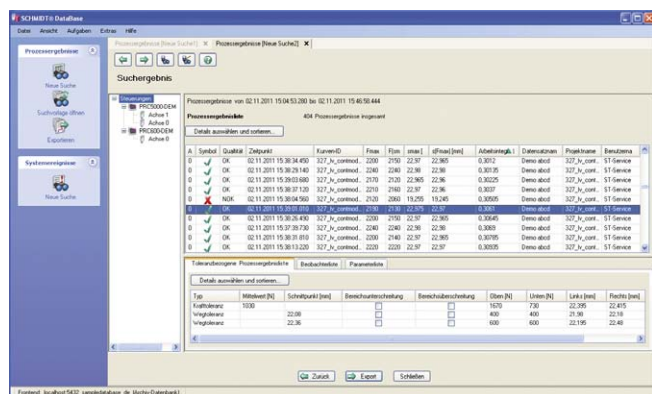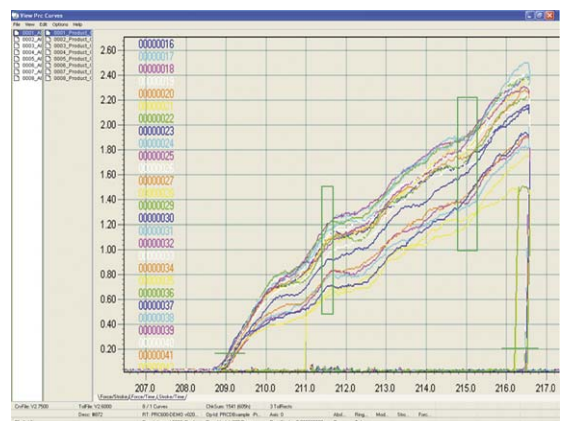

Features

- Documentation
- Analysis
- Quality assurance
- Traceability
- Data export in CSV format
- Q-DAS interface with certification

SCHMIDT® PRC BusInterface

Bidirectional communication in the fieldbus world

The new PLC interface **PRC BusInterface** enables the communication between the **SCHMIDT® press system** and a master controller. It comprises the parameter setting of the system and safety functions. The generation and processing of process data is monitored and controlled as well.

For every position the following control parameters are available:

- set-up mode
- target position
- target speed
- target force
- force increase in the target
- dwell time after reaching the target (for self-running control sequences only)
- speed adjustment at the start of the movement

The following process results can be transmitted to the master control system:

- status signals of system, also error status
- status signals of press axis
- output of current position and force
- output of process data
- signals for data set handling

The procedure of the pressing process is defined as described in the previous points. Further conditions to consider are hardware release (Control On), safety aspects (ServoPress brake test), PDA handling including results and data handling as well as functions like bend up compensation, MoveTol and automatic force taring. The PDA records process data and produces the pressing results based on defined tolerances. After the pressing process, the master control system receives information about the pressing results together with further selectable result values and tolerance errors. The data transfer concerning the runtime performance of the whole signalling processes has basically been optimized so that very fast applications which require higher cycle rates can be realized.

Further functions such as MoveTol offer the possibility to modify the position of the tolerances or by presetting the offset via interface to adjust the evaluation to the individual product. Single tolerances can be influenced directly via PLC programme during runtime.

SCHMIDT® PRC FileXchange

Safe exchange of process data

In addition to data exchange within an automation solution via the interface PRC Businterface, data exchange can also be performed via data files.

For every press process, process results, tolerances, observer, and parameters are written into a file whose format and content can be configured via intuitive user interface.

The following output formats are available:

- Microsoft Excel (CSV)
- Q-DAS
- **SCHMIDT® CRV/TOL**
- XML

Safe production data transmission from PressControl to PC (file system). That means, if the connection between PressControl and PC is broken, this is recorded and the process is stopped. Once the connection is reestablished, the data of the last press process will be transmitted again when needed.

It is also possible to import default values for press processes from a configuration file. A production range which comprises several different products can for example be managed via standard PC application and thus be used as production data base.

SCHMIDT® PRC OPC

Data exchange via the de facto automation standard

In the field of automation, the data communication, using co-ordinated systems and the reference level, is becoming increasingly important. OPC defines a manufacturer-independent interface.

All parties participating in the communication must only support this interface. The OPC-capable components can be combined just like elements of a construction kit.



SCHMIDT® PRC Interface – Hardware



SCHMIDT® PRC Gateway

- 2 CANopen connections for control (master) and PDA (Slave), with 24 V power supply
- 24 V interface with 16 inputs and 16 outputs
- Short-circuit-proof and overload-proof
- Status LED's for CAN bus and I/O's
- Encoder interface for external handwheel as handheld
- Supply voltage 24 V DC
- Top hat rail mounting

The communication with co-ordinated control system is realized via a standardized interface program with **SCHMIDT® Press-Control 600 and 5000**.

All relevant system states as well as “failed” productions are transferred from one control to another via a simple signal transfer. The production data stored in datasets are recallable via the SPS program. If e.g. tools are equipped with an explicit identification code, the production data automatically adapt themselves to the specific process.

All standard physical interfaces, such as

- I/O interface
- CANopen
- EtherNet
- PROFIBUS
- PROFINET (via CANopen/PROFINET-Gateway)
- EtherCAT (via CANopen/EtherCAT-Gateway)
- USB

can be used for signal transfer with the automation environment.



External Handwheel as Handheld

for **SCHMIDT® PressControl 600 and 5000 RT** in conjunction with press force monitored **SCHMIDT® ElectricPress** or **SCHMIDT® ServoPress/TorquePress**, connection via **SCHMIDT® PRC Gateway**.



CANopen Compact Box

- 16 digital combination inputs/outputs (8 inputs and 8 outputs), useable optionally as input and output (24 V)
- Plug 4-pins M8 screw type


SCHMIDT® PressControl

System architecture


SCHMIDT® PressControl does work as a system control and takes over the process monitoring. The hard- and software components forming a system concept with real time characteristics. This is guaranteed by a system architecture with CANopen fieldbus. Press force monitored SCHMIDT® ManualPress,

SCHMIDT® (Hydro-)PneumaticPress, SCHMIDT® ElectricPress or SCHMIDT® ServoPress/TorquePress will be activated via fieldbus. The collected measuring data as well as in-/output data will be exchanged by the fieldbus.

SCHMIDT® PressControl 600

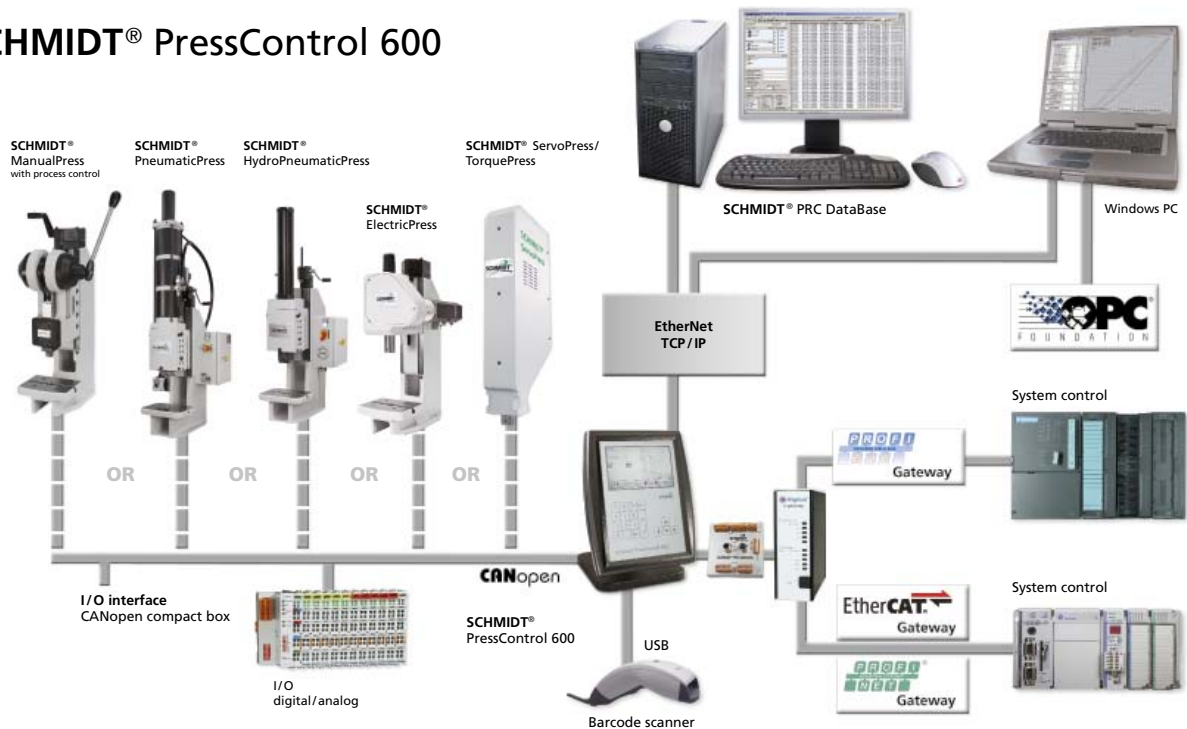

SCHMIDT® PressControl 5000

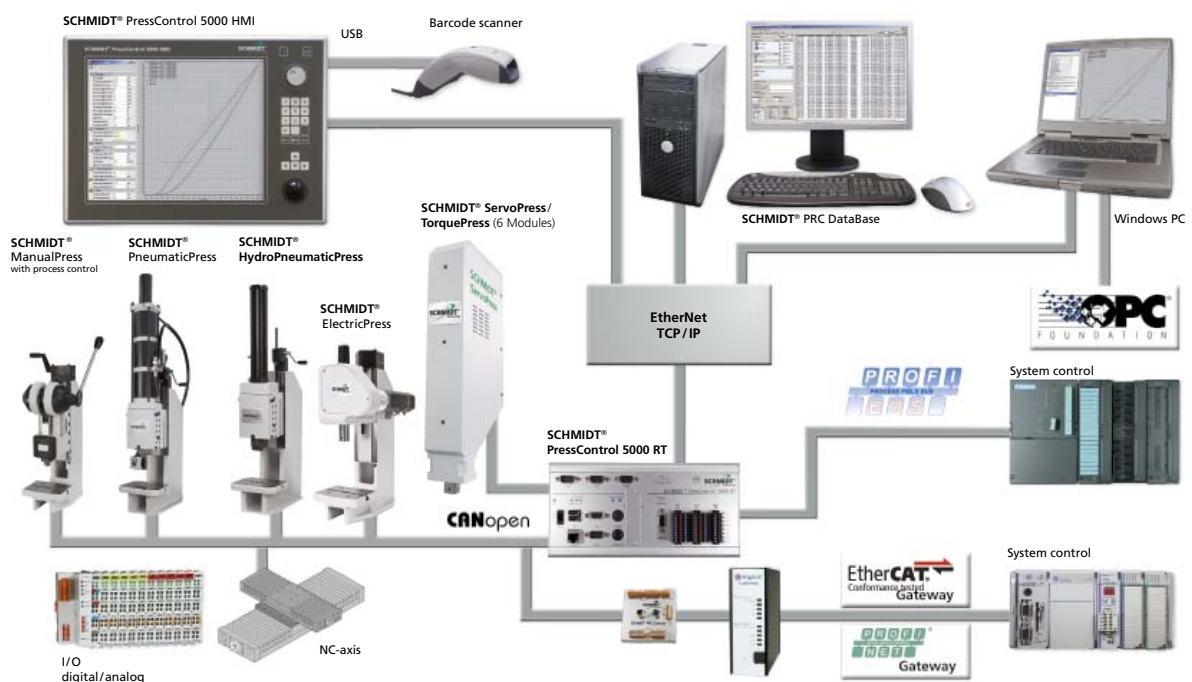

SCHMIDT® Manual Workstations

Ergonomic manual workstations with safety technology

SCHMIDT® manual workstations are delivered ready for operation with certified safety technology, press base, and corresponding operating elements. Depending on customer requirements, the workstations can be equipped with light curtain, **SCHMIDT®** SmartGuard protective housing or the proven two-hand safety technology. These systems are single workstations which can be delivered with all **SCHMIDT®** presses.

Included in the scope of delivery are:

- **SCHMIDT®** press module mounted on frame and/or gantry
- **SCHMIDT®** PressControl 75, **SCHMIDT®** PressControl 600 or **SCHMIDT®** PressControl 5000 with pivoting support arm system
- press base PU 20 / PU 40 (in fixed or height-adjustable design)

Available safety equipment:

- transparent protective housing with light curtain and workplace illumination (adjustable distance of the light curtain in order to ensure a safe distance to the tool)
- **SCHMIDT®** SmartGuard protective housing with automatic transparent safety door
- two-hand safety technology

All systems are EC type-approved!




SCHMIDT® Press Bases

Ergonomic in focus


SCHMIDT® Press Base PU 20 and PU 40 for a safe and vibration-proof installation of all **SCHMIDT® Press Systems**.

Both press bases are available in two versions:

- Fixed columns with height adjustable in 10 mm (0.4") increments from 780 to 1080 mm (30.7" – 42.5")
- Infinitely variable motorized height adjustment from 725 to 1075 mm (28.5" – 42.3")

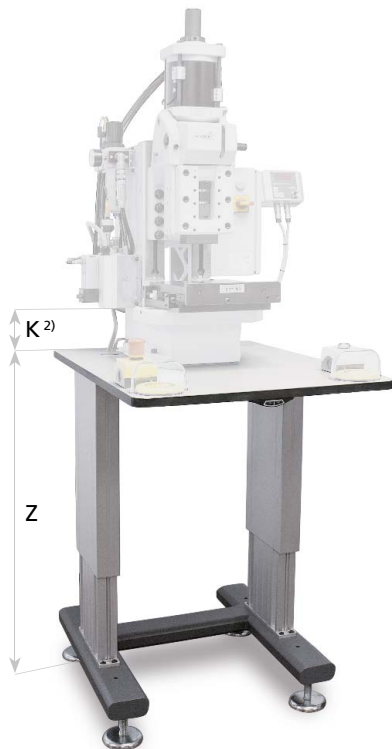

PU 20 with two variable columns

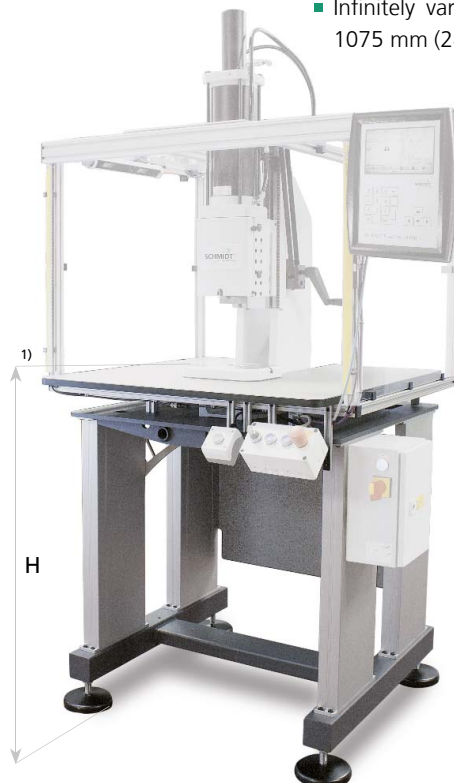

PU 40 with four fixed columns



PU 40 with four variable columns

Technical Data			PU 20 (2 columns)	PU 40 (4 columns)
Fixed columns	H	individually	780 mm - 1080 mm	780 mm - 1080 mm
Motorized variable columns	Z	stepless	725 mm - 1075 mm	725 mm - 1075 mm
Lifting capacity		kg	600	1200
Width x depth		mm	598 x 841	870 x 797
Weight:				
fix		kg	36	131
height adjustable			55	164
Foot rest		kg		16

¹⁾ Height **H** measured from floor space to press table top

²⁾ Fixing dimension **Z** frame on press base, resulting height of the press table depends on frame type. (See dimension **K** in the press chapters)

Example

Frame type No 29

K = 141 mm

PU (725 mm to 1075 mm) and press table 141 mm, total height of press table infinitely adjustable from 866 mm to 1216 mm

SCHMIDT® Four-column Gantry

SCHMIDT® Four-column gantries used in manual workstations, and automated assembly lines, are suitable for all **SCHMIDT® Presses** with extraordinary requirements in all working area.

In order to consider the large number of applications and cases, the design is adapted specifically to your requirements. All individual requirements can be taken into account. Short delivery times are realized because of in-house production. Contact us with dimensions (see table), and we can supply you with a proposal.


Features

Base-plate

- Coated: RAL 7035 (light-grey)
- Cross T-slot 45° 14^{H7}
- Central bore 40^{H7}, other bores on request

Cover plate

- Coated: RAL 7035 (light-grey)
- Connection drill pattern for the required press
- Chromium-plated columns

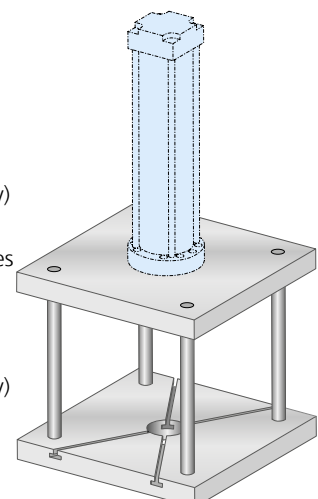


SCHMIDT® Slide Tables

For efficient production


SCHMIDT® Slide Tables are specially designed for the high forces of press systems and where a position requires high precision against an adjustable stop. It is an economic solution for tall parts and for placement of parts outside of the danger area. They can be mounted, depending on the type, both in longitudinal and lateral positions, and can be adapted for automated processes.

Features


- Cross roller bearings for high-precision guidance
- Play-free adjustment of the table guidance is possible
- Maintains its working position via pneumatic cylinders
- Position detection of the slide table via integrated sensors
- Integrated shock absorbers cushion impact at end positions
- Positioning via pneumatic cylinders in automatic mode
- The press stroke is activated only when the slide is in its proper position

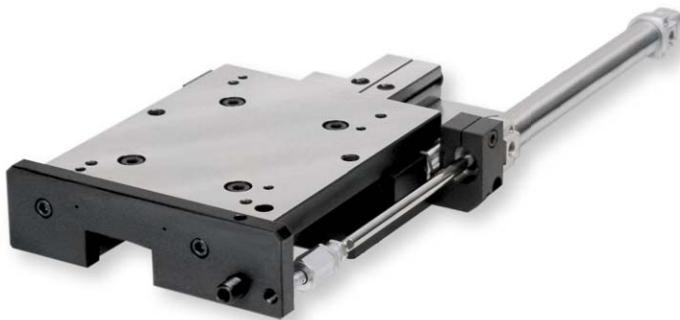


ST 10/ST 10 P
(stroke 80 mm)

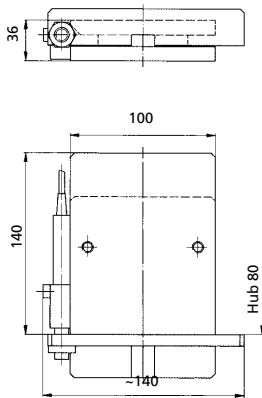

ST 45 P
(stroke 130 mm)

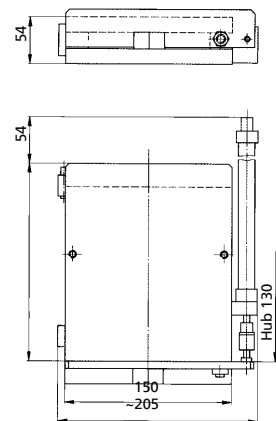

ST 140 P
(stroke 160 mm)

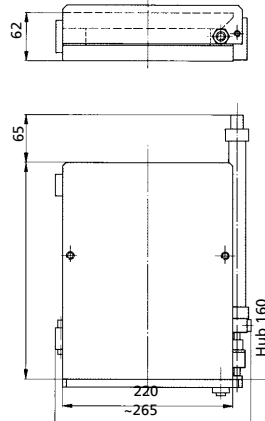

Type		ST 10	ST 10 P	ST 45	ST 45 P	ST 140 P
Pressure load	kN	10	10	45	45	140
Stroke	mm	80, 160	80, 160	130, 200 250	130, 200 250	160, 200, 250, 300
Suitable for press type		20, 23, 24, 320, 323, ¹⁾	20, 23, 24, 320, 323	20, 23, 24, 25, 27, 32, 33, 34, 61, 62, 65, 320, 323, 327, 361 ¹⁾	20, 23, 24, 25, 27, 32, 33, 34, 61, 62, 65, 320, 323, 327, 361	29, 36, 65, 68, 74, 76, 329, 362, 365, 368, 374, 376
Manual presses		till 10 kN	till 10 kN	all	all	
ServoPresses		405, 415, 416	405, 415, 416	420 max.	420 max.	all
Shock absorber			•		•	•
Bow-type handle		•		•		
Operating mode		manual	pneumatic	manual	pneumatic	pneumatic

Mounting holes available upon request

• Standard

¹⁾ all **ManualPress** < 10 kN

²⁾ all **ManualPress**

Special designs for very long strokes on request
manual = without cylinder, without sensors,
without shock absorber

SCHMIDT® Slide Table
ST 45 P longitudinal



SCHMIDT® Slide Table
ST 45 P lateral
with adapter plate for fastening
on the fixture mounting plate



SCHMIDT® Slide Table ST 45
with bow-type handle, manual



SCHMIDT® Safety Technology

Safety concepts

SCHMIDT® SmartGuard

The transparent protective housing entirely encloses the working area during the press process. It thus prevents the user and a third person from getting their hands into the danger area and efficiently protects against the particles or splinters that may be ejected. The distances to the working zone are minimized which considerably improves the ergonomics and the efficiency of the workstations. The high dynamics of the protective housing with numerical control and its variable positioning capability and traversing velocity optimize the process cycle. The smart construction prevents any trap points in the enclosure.

SmartGuard	Typ	405	415/416	417	520
Variable opening stroke	mm	280	350	410	410
Speed opening	mm/s	200 - 1000			
Speed closing	mm/s	200 - 500			
Electr. safety lock	cat	Ple			
Drive	typ	Servo motor			
Min. cycle	s	6			
Maximum power	W	80			
Protection class	IP				
Deep	mm	434	485	573	599
Wide	mm	232	286	312	343
Height	mm	1018	1111	1440	1640
Material guard	PC	antistatic / transparent			



Light curtain with transparent protective housing

The light curtain control provides optimum safety to the user. The danger area is protected with macrolon windows against contact. A light curtain protects the access to the danger area on the side of insertion. The working process is immediately interrupted and the press is stopped when intervening. The cycle can be continued automatically after leaving the danger area. In combination with **SCHMIDT® ServoPress**, the light curtain control is the basic version. The press can be activated via the light curtain. Depending on the application, it can be selected between 1-cycle and 2-cycle activation.



Two-hand safety technology

In basic design, **SCHMIDT® PneumaticPress**, **SCHMIDT® Hydro-PneumaticPress** as well as **SCHMIDT® ElectricPress** are operated with **two-hand safety technology**. The user must keep both switches in release position. If one switch is released ahead of time, the press stroke is interrupted. This applies to all positions above the automatic stroke takeover that is started from the point where the dangerous closing movement is finished. From the stroke takeover, the stroke is continued automatically.

SCHMIDT® Customer-Specific Solutions

Standard 'out of the catalog' products, customized or complete turn key solutions. **SCHMIDT Technology** is an invaluable source for your assembly needs, with the center point being a press. We welcome the opportunity to evaluate your application, perform feasibility studies, process sample parts to determine process capability from a control, as well as monitoring standpoint.

We can take your applications from process development and manufacturing of prototype tooling to provide you with custom designed, turn-key solutions.

SCHMIDT® engineers and sales force have gained a wealth of experience while working on a wide array of applications.

SCHMIDT Technology products are suitable for a broad variety of industries and can be tailored to the specific requirements and challenges that applications present, from very basic and simple pressing operations to intelligent, precise and complex processes, combined with monitoring.

The ever rising need to log and exchange process data with third party systems can easily be addressed by the various ways our control systems can be interfaced.

Your need is our challenge. We look forward to the opportunity to be of service.



SCHMIDT® ElectricPress 43/343 Automation

Integrates easily and quickly into an automated system; ideal for new design concepts, integration or as a replacement in an existing production line.



SCHMIDT® PressControl 5000 RT

controlling a 6 axis system consisting of:

- ServoPress 420
- ServoPress 416
- NC Axis for the tooling shuttle
- NC Gripper with NC X/Y positioning axis

SCHMIDT® Customer-Specific Solutions



„Compliant Pin“ application

SCHMIDT® ServoPress Systems are the ideal tool for press-fit applications. Their integrated process data and closed-loop force control is perfect for the assembly and disassembly of electronic components. In contrast to soldering, press-fit contacts on a circuit board requires precisely defined and closely monitored assembly processes at very slow speeds. A **SCHMIDT® Press** can be the solution.

All **SCHMIDT® Press Types** can be integrated in a rotary indexing system. Depending on the requirements of the customer, an individual design is planned.

Hybrid Assembly Cell Configuration with

- a monitored PneumaticPress
- a monitored ServoPress
- a conventional HydroPneumaticPress

A single **SCHMIDT® PressControl 5000 RT** can control all of these presses as well as an indexing table. It acquires all stroke/force process data, which can then be transmitted to the **SCHMIDT® DataBase** software for storage and analysis.



SCHMIDT® Service/Support

Close to the customer thanks to a perfect service

In order to meet the high quality standards of modern production, to comply with legal requirements periodic calibrations and safety tests of the press systems according to DIN ISO 9000, safety measures are required.

SCHMIDT Technology assists you by means of a strong service package in meeting these requirements.

SCHMIDT® Calibration

for force-monitored press systems

SCHMIDT® PressControl

- Checking the measurement system
- Calibration
- Issue of a test certificate incl. test report
- Calibration sticker on the machine

SCHMIDT® SafetyCheck

for all **SCHMIDT® PressSystems** with type approval

- Test according to the relevant standards
- Measurement and test of the two-hand switching
- Follow-up measurement
- Functional safety check
- General functional check
- Issue of a test report
- Test sticker on the machine

For Light Curtain Systems

- Additional test according to the relevant standards



Telephone Support

Telephone support is available from 7h30 to 16h30 (GMT +1) on workdays. If any technical queries cannot be resolved by telephone, we can provide our engineer on site within 24 hours. This service at your site reduces your production downtime to a minimum.

You can reach our service department by phone on **+49 (7724) 89 90**.



SCHMIDT® CompetenceCenter

We have a large number of presses and press systems in our exhibition and testing area at your disposal. Visitors are welcome to our Competence Center to discuss at first hand their specific requirements with our team of experts, who will be pleased to conduct trials on their tools and offer advice and best solutions for all applications.

SCHMIDT® TrainingCenter

Our training packages prepare the participants fully in theory and practice for their daily work with **SCHMIDT® Press Systems**, by offering comprehensive user training courses and seminars on complex technological products. These training courses deal with the handling of the products as well as the correct use of the control and process software. **SCHMIDT Technology** stands for high quality products and their efficient use on site.



SCHMIDT® DemoBus

Our press technology will come to your premises. The **SCHMIDT® DemoBus** contains a selection of fully functional presses and accessories.

- See the innovative news and trends
- Get a wide overview over our products
- Do not lose time and save travel costs
- Discuss your assembly applications with our experts
- Conduct trials (by prior arrangements)

Our Representations Worldwide

Adresses of the Subsidiaries and Representations



Australia, New Zealand
Bliss & Reels Co. Pty.
9 Kim Close
AU-3105 Bulleen, Victoria
Fon +61 (3) 98 50 66 66
sales@blissandreels.com.au

Austria
Maxxom Automation GmbH
Gewerbegebiet
Salzweg 1
A-4894 Oberhofen am Irsee
Fon +43 6213 20053 0
office@maxxom-automation.at

BeNeLux
Germo Techniek BV
Rotterdamseweg 382 A
NL-2629 HG Delft
Fon +31 (15) 251 11 10
pbos@germotechniek.nl

China
Team Tech Auto System (Suzhou) Co., Ltd.
Sun yuxiang
Manager for Press Division
No.12 Li Tang Road. Industrial Park
Suzhou City of China
Fon: +86 189 625 11 262
yuxiang.sun@tt-autos.com

Czech Republic
Presston spol. s.r.o.
Bozotechova 50
CZ-61200 Brno
Fon +420 541 248 853
presston@presston-stroje.cz

Denmark
MT//Skovhoej
Stensmosevej 24F
DK-2620 Albertslund
Fon +45 439 575 75
tmb@mtgruppen.dk

Finland, Estonia
Pneumacon Oy
Palo-ojantie 5
05810 Hyvinkää
Fon +35 810 7781 400
harri.lindroos@pneumacon.fi

France
SCHMIDT Technology SAS
4 Rue de l'Artisanat
67116 Reichstett (Strasbourg)
Fon +33 (0) 3 88 62 68 53
info@schmidttechnology.fr

Hungary, Bulgaria, Romania
Eckerle Industrie Kft.
Dózsa György út 44
HU-6200 Kiskörös
Fon +36 (78) 511 400
info@hu.eckerle-gruppe.com

India
LEAPTECH CORPORATION
812 Cosmos, Sector 11
CBD Belapur,
New Mumbai 400 614
India
Fon +91(22) 2756 2822
leaptech@vsnl.net

Indonesia
PT Supra Engineering
Jl. Pecenongan No. 17 D
ID-10120 Jakarta
Fon +62 (21) 345 7469
atsupra@supra.co.id

Italy
Seica Automation Srl
Via Kennedy 24
10019 Strambino (TO), Italia
Fon +39 0362 157 2606
sales@seica.com

Israel
Tamir Eran Engineering &
Development Ltd
7 Hamifalim St. Kiriat-Arie
48179 Petach-Tikva
Fon +972 3 922 9422
tamireng@netvision.net.il

Japan
Naka Seiki Co. Ltd.
1-2-17 Kinda-cho, Moriguchi-shi
JP-570-0011 Osaka
Fon + 81 (06) 69 01 18 75
honsha@nakaseiki.co.jp

Malaysia, Philippines, Singapore, Vietnam
Preston Technology SDN BHD
1-2-30, Ideal Avenue
Medan Kampung Relau 1,
11900 Bayan Lepas,
Pulau Pinang, Malaysia.
Fon +60 4-6 38 1701 / 1702
iychang@preston-technology.com

Norway
Stang Maskin AS
Åsveien 2
N-3475 Sætre
Fon +47 66 77 73 10
post@stang-maskin.no

Poland
Przedsiębiorstwo AMS Sp. z o.o.
Jagodnik 17C
PL-58-100 Swidnica
Fon +48 (74) 853 4715
ams@ams-at.pl

Slovakia
MTS, spol. s.r.o.
Krivá 53
SK-02755 Krivá
Fon +421 (435) 819 111
mts@mts.sk

Slovenia, Croatia, Bosnia, Serbia
MB-Naklo d.o.o.
Ulica Toma Zupana 16
SI-4202 Naklo
Fon +386 (0)4 277 17 00
mb-naklo@mb-naklo.si

South Korea
Tae Jin Industry Co. Ltd.
#A - 909 Doksan Hyundai
Knowledge Industry Center, 70
Doosan-ro, Geumcheon-gu,
Seoul, Korea
Fon +82 (2) 894 88 39
taejin@schmidt.co.kr

Spain, Portugal
ATSI
Luis Merelo y Mas, 6
E-46023 Valencia
Fon +34 (96) 337 04 00
atsi@atsi.es

Sweden
Deprag Scandinavia AB
Gap Sundins Väg 3
SE-633 46 Eskilstuna
Fon +46 (16) 126110
info@deprag.se

Switzerland
SCHMIDT Technology GmbH
Industriestrasse 6
4528 Zuchwil
Fon +41 (0)32 513 23 24
infoCH@schmidttechnology.ch

Taiwan
I-Hen Machine Co. Ltd.
6F-9, No. 12, Lane 609, Sec. 5
Chung Hsin Road, San-Chung City
Taipei
Fon +886 (22) 999 6766
ihenco@ms9.hinet.net

Thailand
NSW Automation (Thailand) Co., Ltd.
19/60-61, Moo 3, T.Klong Neung,
Amphur Klong Luang, Pathumthani,
12120 Thailand
Fon +66 2 902 2394/5
charoen@nswautomation.com

Tunisia, Morocco, Algeria, Egypt, Jordan, Saudi Arabia, United Arab Emirates
EP-Technology
29 AV. AHMED TULI
Zone Industrielle Borj Cedria
2055 Bir EL Bey - Ben Arous
TUNISIA
Fon +216 (79) 41 28 89
info@EP-Technologie.com

Turkey
Günmak Industrial Tool Pump and
Automation System Inc.
Toros Caddesi No. 78
TR-34846 K.Maltepe - Istanbul
Fon +90 (216) 370 76 76
iguner@gunmak.com

United Kingdom
SCHMIDT Technology Ltd.
Albany House, Shute End,
Wokingham, Berks RG40 1BJ
United Kingdom (UK)
Fon +44 (0) 118930 5464
sales@schmidttechnology.co.uk

USA
SCHMIDT Technology Corp.
Cranberry Corporate Center
280 Executive Drive
Cranberry Twp., PA 16066
Fon +1(724) 7 72-46 00
info@schmidtpresses.com


PRÍDTE SA K NÁM POZRIEŤ

**Ozvíte sa nám a prídeme spolu
na to, ako uľahčiť vašim ľuďom
aj tú najnáročnejšiu prácu.**



Martin Planieta
obchodno-technický zástupca
pre lisovaciu techniku

KONTAKT:
martin.planieta@mts.sk
+421 907 770 127

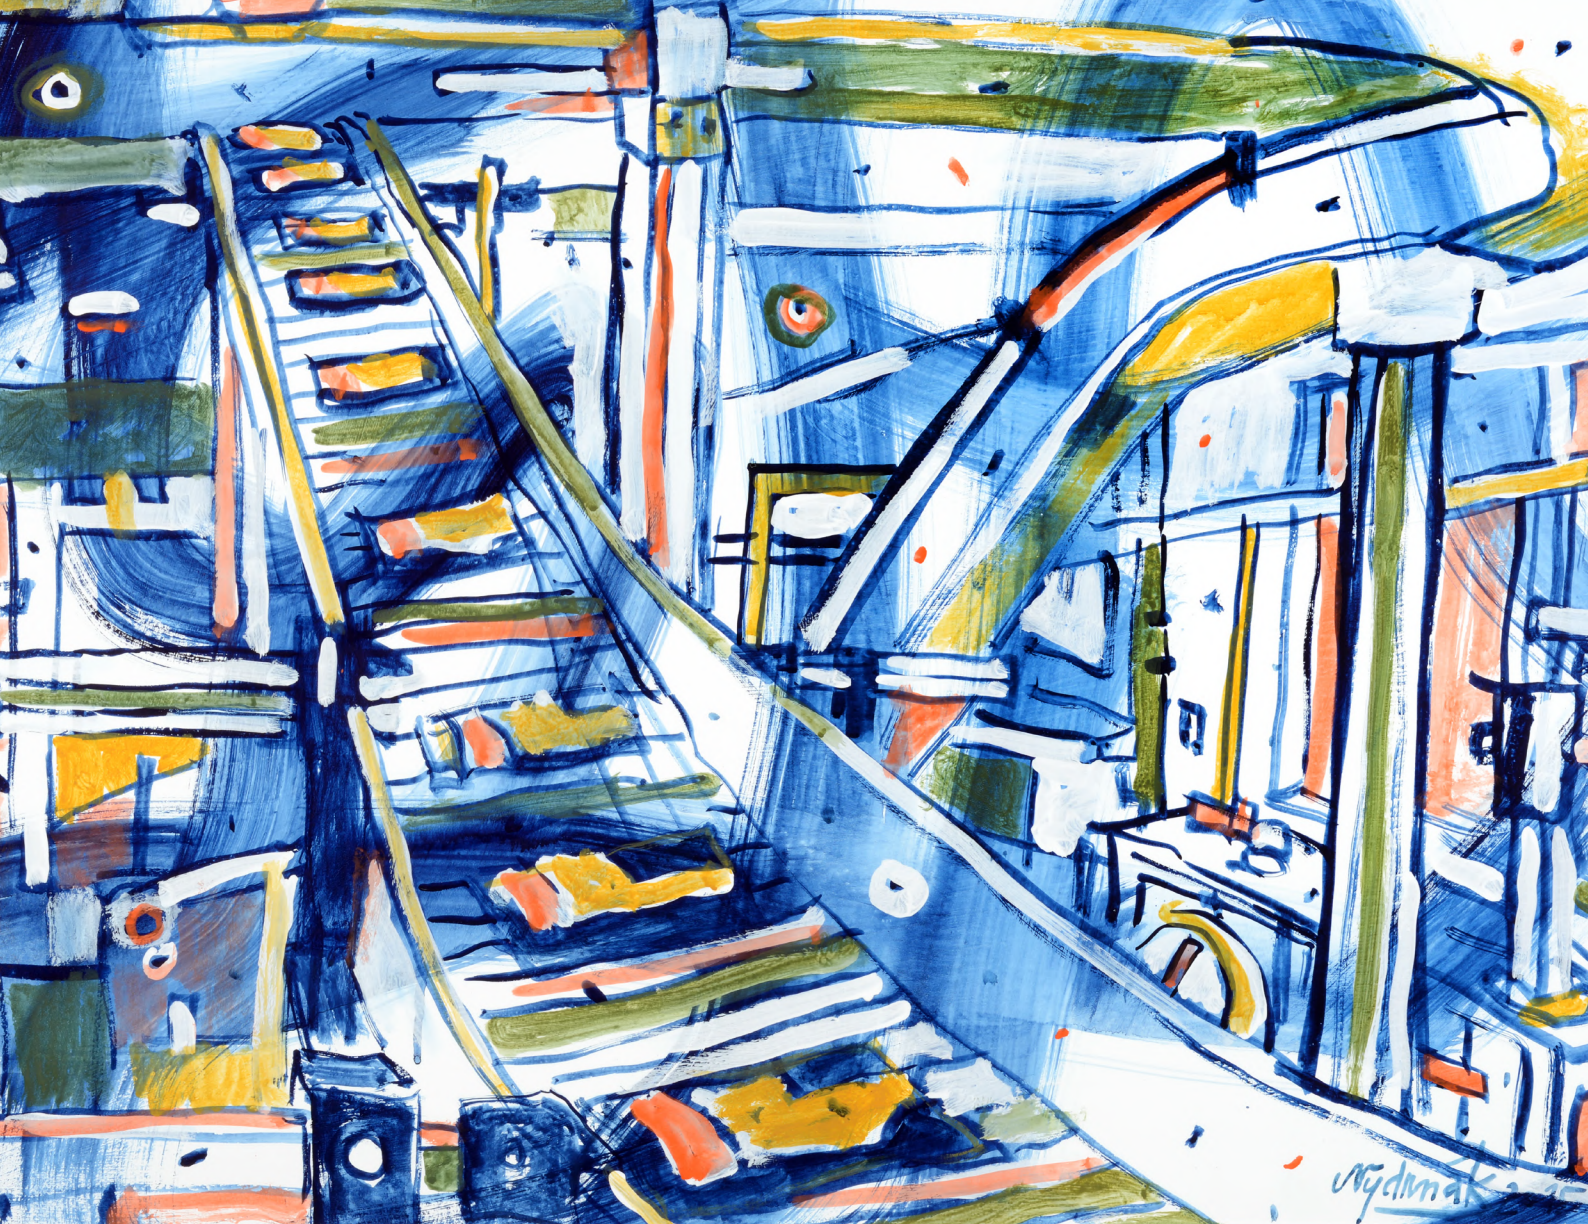

Sídlo spoločnosti:
MTS, spol. s r.o.
027 55 Krivá 53
Slovak Republic

+421 43 5502 111
mts@mts.sk

www.mts.sk